

## STEADY STATE IR SOURCE Model EK-8523

Helioworks offers a unique steady state infrared emitter for the mid IR spectrum that operates at up to 950°C (1223°K) in an industry standard TO-8 package. Includes a Zinc Selenide (ZnSe) window with spectral transmission to over 14 microns.


**Key features include:**

- Kanthal Filament with Emissivity of 0.7
- Zinc Selenide (ZnSe) Window
- Internal Gold Plated Parabolic Reflector
- Standard TO-8 Package
- Inert Gas Backfill



**Electrical Specifications:**

Peak Voltage = 3.0 Volts DC MAXIMUM  
Peak Current = 1.48 Amps  
Peak Power = 4.4 Watts

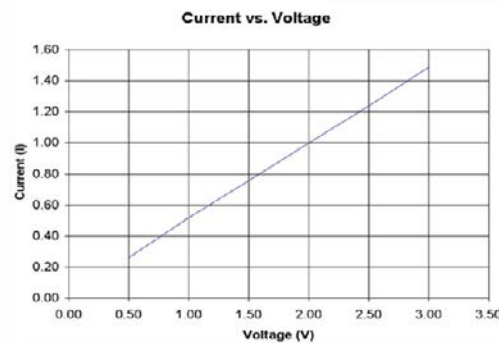


V	I	W=VI	R=V/I
0.50	0.26	0.13	1.90
1.00	0.52	0.52	1.92
1.50	0.76	1.14	1.97
2.00	1.00	2.00	2.00
2.50	1.24	3.10	2.02
2.80	1.39	3.89	2.01
3.00	1.49	4.47	2.01

Approximate 950° C

**Radiance (Watts/CM2):**

Volts = 3.0, Distance = 3.0 inches from source

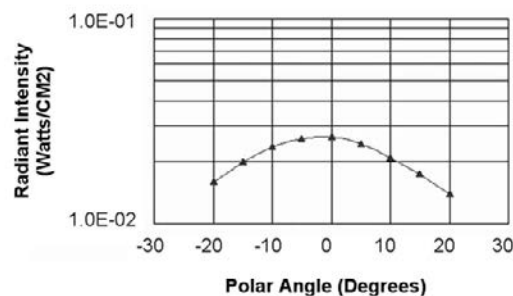

Polar Angle	Average (Watts/CM2)
-20	1.60E-02
-15	2.00E-02
-10	2.37E-02
-5	2.60E-02
0	2.65E-02
5	2.45E-02
10	2.10E-02
15	1.75E-02
20	1.40E-02