

Data Sheet Low Power Driver LPD 2-50


Features

Drives arbitrary current waveforms into laser diodes
 CW, pulsed, modulated or mixed curves
 Short rise and fall time, no overshoot, no ripple
 Set-point adjustment: analog input and potentiometer
 Digital enable / trigger input



Specification

Diode current	0 mA ... 2000 mA
Diode voltage	max 47 V
Power dissipation	3.8 W max (no heatsink)
Power dissipation	15.6 W max (heatsink required)
Supply voltage	12 V ... 48 V, max. 50 V
Supply voltage min	diode voltage + 1 V
Supply current	2.05 A max
Rise time	< 3.5 μ s
Fall time	< 3.5 μ s
Frequency	50 kHz max (square wave)
Frequency	165 kHz max (sine wave, -3dB)
Accuracy	± 1 %
Linearity	± 1 %
Temperature stability	± 150 ppm / $^{\circ}$ C
Ripple	no ripple

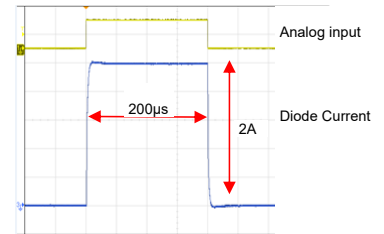

Inputs

Diode current set point	0 V ... 10 V (impedance: 2 k Ω)
Enable	TTL - low active (impedance: 1 k Ω)

Output

Diode current	Terminal
---------------	----------

General specifications

Ambient temperature	0 ... +45 $^{\circ}$ C
Dimensions	67 x 37 x 11 mm, Heatsink Kit 105 x 50 x 39 mm
Weight	16 g, with heat sink 166 g

Description

Low power driver LPD 2-50 is a linear current source with excellent properties for driving low power laser diodes. Current waveforms can be CW, pulsed, modulated or a combination with frequencies up to 50 kHz (square wave) and currents up to 2 A. An analog modulation input and a digital enable / trigger input can generate fast and clean pulses. An analog input and a potentiometer control the current set point. Both values are added and build the effective current set point. LPD 2-50 is small and compact and can be operated without heatsink ($P_{DISS} < 3.8W$). A heatsink is required for $P_{DISS} > 3.8W$.

Technical subjects to change without notice.

Type	Description	Ordering code
LPD 2-50	Current Source	10100922
LPD-2-HSK	Heatsink Kit	10100921



Warning!
Risk of exposure of hazardous laser radiation
in combination with laser light emitting devices!

Document: 10100922	Revision: 00	Date: 31.07.2020
--------------------	--------------	------------------