


Preliminary Datasheet

LCA-B

Ultra-Low-Noise Current Amplifier Low Cost OEM-Serie



Features

- Transimpedance (Gain) Switchable from 1×10^{10} to 1×10^6 V/A
- Bandwidth DC ... 2 MHz (With Additional Switchable Low Pass Filter)
- Input Noise Current down to 7 fA/√Hz
- OEM Design – Ready for Integration in Industrial Measurement Systems

Applications

- Sensitive Current Measurements for Example Photodiode- or STM-Preamplifier
- Amplifier for Ionization and Charge Detectors
- Preamplifier for Oscilloscopes, A/D-Converters, Digital Voltmeter etc.

Specifications

Test Conditions: $V_s = \pm 15$ V, $T_a = 25^\circ\text{C}$

Product-Code LCA-B-	Full-Bandwidth (-3dB) DC ...	Gain ² (Transimpedance)	Input Current Range	Input Noise Current ²	Integrated Input Noise Current ⁴	Max. Source Capacitance
5K-1G	5 kHz	1×10^9 V/A	± 10 nA	7 fA/√Hz	1.1 pA _{RMS}	5 nF
		1×10^{10} V/A	± 1 nA	7 fA/√Hz	0.9 pA _{RMS}	5 nF
50K-100M	50 kHz	1×10^8 V/A	± 0.1 μA	20 fA/√Hz	9.2 pA _{RMS}	5 nF
		1×10^9 V/A	± 10 nA	20 fA/√Hz	8.2 pA _{RMS}	5 nF
500K-10M	500 kHz	1×10^7 V/A	± 1 μA	53 fA/√Hz	210 pA _{RMS}	3 nF
		1×10^8 V/A	± 0.1 μA	53 fA/√Hz	200 pA _{RMS}	3 nF
3M-1M	3 MHz	1×10^6 V/A	± 10 μA	190 fA/√Hz	3.6 nA _{RMS}	3 nF
		1×10^7 V/A	± 1 μA	190 fA/√Hz	2.2 nA _{RMS}	3 nF

¹ Accuracy: $\pm 5\%$ and independent of input detector capacitance up to about 1 nF

² @ ≥ 10 kΩ load, Accuracy: $\pm 1\%$

³ measured @ 1 kHz

⁴ The integrated input noise is measured with an open but shielded amplifier input in the full bandwidth (FBW) setting. The input referred peak-peak noise can be calculated from the RMS noise as follows:

$$I_{\text{peak-peak}} = I_{\text{RMS}} \times 6$$

The output noise is given by:

$$U_{\text{peak-peak}} = I_{\text{peak-peak}} \times \text{Gain}$$

Input

Equ. Input Noise Voltage 5 nV/√Hz (@ 5 kHz)
Input Bias Current 2 pA
Input Bias Current Drift Factor 2 / 10 °C
Input/Output Polarity non inverting
Input Offset Voltage < 1 mV
DC Input Impedance 50 Ω || 5 pF

Output

Output Voltage Swing ± 10 V (@ ≥ 10 kΩ load)
Linearity < 1 %
Output Impedance 50 Ω (@ ≥ 10 kΩ load for best performance)
Max. Output Current ± 30 mA (for linear amplification)
Output Offset < 3 mV (for low gain setting)

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



DE-LCA-B_R1/MB/R1/11May2012

1

United Kingdom
Laser Components (UK) Ltd.
Tel: +44 1245 491 499
Fax: +44 1245 491 801
info@lasercomponents.co.uk
www.lasercomponents.co.uk

France
Laser Components S.A.S.
Tel: +33 1 39 59 52 25
Fax: +33 1 39 59 53 50
info@lasercomponents.fr
www.lasercomponents.fr

Preliminary Datasheet

LCA-B

Ultra-Low-Noise Current Amplifier Low Cost OEM-Serie

Digital Control	Control Input Voltage Range	LOW bit: - 0.8 ... + 1.2 V HIGH bit: +2.3 ... +12 V	
	Control Input Current:	0 mA @ 0 V 1.6 mA @ 5 V	
	General	Remote control input bits are opto-isolated and connected by logical OR function to local switch settings. For remote control do not set the corresponding local switches, "Gain" and "LP" (Low Pass) and select the wanted setting via a bit code at the corresponding digital inputs.	
	Gain Setting	Transimpedance Gain (TIA)	Pin 6
Remote Control Operation		Low Gain = TIA x 1	LOW
		High Gain = TIA x 10	HIGH
	Bandwidth Setting	Low Pass	Pin 4
		Full Bandwidth (FBW) Low Pass = FBW / 10	LOW HIGH
Power Supply	Supply Voltage	$\pm 14 \dots 22$ VDC	
	Supply Current	± 35 mA typ. (recommended power supply capability min. ± 60 mA)	
Temperature Range	Operating Temperature	0 ... + 70 °C	
	Storage Temperature	- 40 ... + 100 °C	
Absolute Maximum Ratings	Input Voltage	± 5 V	
	Power Supply Voltage	± 24 V	
	Operating Temperature	+5 °C ... +70 °C	
Connectors	Input	SMA	(right angle female jack)
	Output	SMA	(right angle female jack)
	Accessory Kit (included)	2 pc. SMA-BNC adapters, straight	
	Power Supply and Remote Control	board connector with locking mechanism pluggable screw type terminal block (type 169 RIACON)	
	Connected Wire Range	Pin 1:	positive supply voltage, + Vs
		Pin 2:	ground for power supply, GND
		Pin 3:	negative supply voltage, - Vs
		Pin 4:	digital control input, LP (low pass)
		Pin 5:	ground for digital control pins, DGND
General	Construction Design	assembled board with four mounting holes	
	Material	FR4 circuit board, tinplate	
	Weight	40 g (0.09 lb.)	
	RoHS conform	yes	


SOPHISTICATED TOOLS FOR SIGNAL RECOVERY


Preliminary Datasheet

LCA-B

Ultra-Low-Noise Current Amplifier Low Cost OEM-Serie

Dimensions

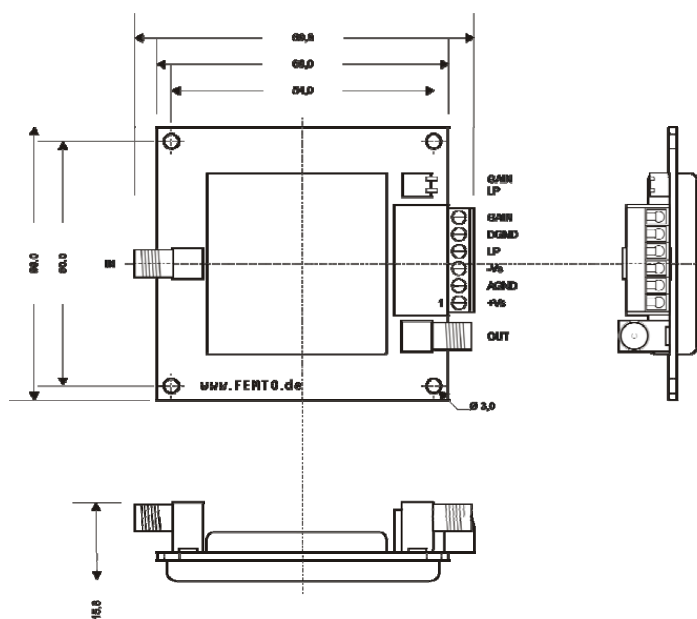

All dimensions in mm

OEM-Information

For further information and pricing please contact us.

Scope of Delivery

LCA-B, datasheet, 2 pc. SMA-BNC adapters straight, transport package

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.
© by FEMTO Messtechnik GmbH
Printed in Germany

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

F E M T O

3

United Kingdom
Laser Components (UK) Ltd.
Tel: +44 1245 491 499
Fax: +44 1245 491 801
info@lasercomponents.co.uk
www.lasercomponents.co.uk

France
Laser Components S.A.S.
Tel: +33 1 39 59 52 25
Fax: +33 1 39 59 53 50
info@lasercomponents.fr
www.lasercomponents.fr