


Datasheet

OE-300-SI-30

100 MHz Variable Gain Photoreceiver

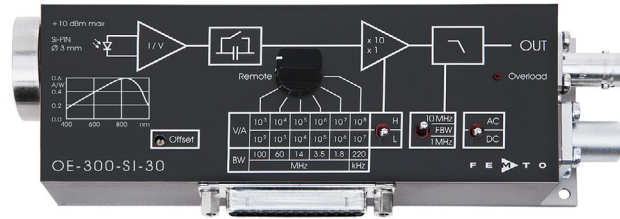

The image shows model OE-300-SI-30-FST with 1.035"-40 threaded flange and coupler ring.


Features

- Adjustable transimpedance gain from 10^2 to 10^8 V/A
- Wide bandwidth up to 100 MHz
- Si-PIN photodiode covering the 320 to 1000 nm wavelength range
- Large optical detector size 3 mm dia.
- High dynamic input range up to 10 mW optical power
- Very low noise, NEP down to 81 fW/√Hz
- Switchable low pass filters for minimizing wideband noise
- Threaded 1.035"-40 and unthreaded 25 mm dia. free space input available, compatible with many optical standard accessories
- 1.035"-40 input easily convertible to fiber optic input with optional adapter
- Full manual and remote control capability

Applications

- All-purpose low-noise photoreceiver (O/E converter) for the MHz range
- Time resolved optical pulse and power measurements
- Laser intensity noise measurements (RIN)
- Optical front-end for oscilloscopes, spectrum analyzers, A/D converters and RF lock-in amplifiers

Block Diagram

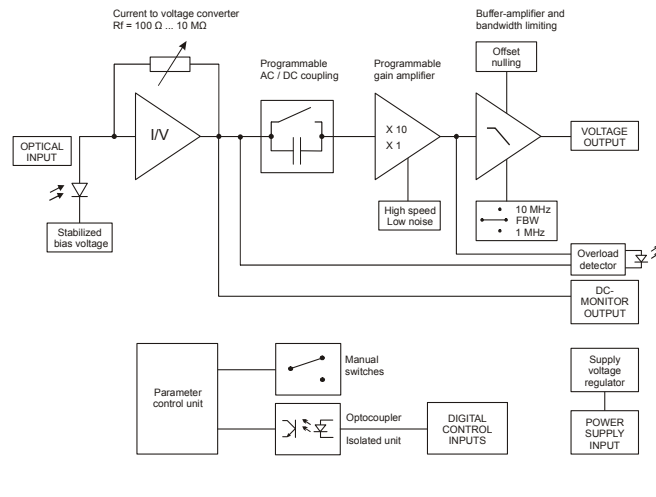

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



DE-OE-300-SI-30_R2/MG/JM/25OCT2018

Datasheet

OE-300-SI-30

100 MHz Variable Gain Photoreceiver

Available Versions

OE-300-SI-30-FST




Internal threaded coupler ring with 30 mm outer diameter (included)

1.035"-40 threaded flange for free space applications compatible with many optical standard accessories and for use with various types of fiber connector adapters.

Optional: Fiber adapters PRA-FC and PRA-FSMA



OE-200-SI-30-FS



25 mm dia. unthreaded flange for free space applications compatible with many optical standard accessories.

Related OE-300 Models

See separate datasheets for following models on www.femto.de:

OE-300-SI-10-FST	Si-PIN, 1 x 1 mm, 400 - 1000 nm 1.035"- 40 threaded flange
OE-300-SI-10-FS	Si-PIN, 1 x 1 mm, 400 - 1000 nm 25 mm dia. unthreaded flange
OE-300-IN-01-FC	InGaAs-PIN, ϕ 80 μ m, 900 - 1700 nm FC fiber receptacle only
OE-300-IN-03-FST	InGaAs-PIN, ϕ 300 μ m, 800 - 1700 nm 1.035"-40 threaded flange
OE-300-IN-03-FS	InGaAs-PIN, ϕ 300 μ m, 800 - 1700 nm 25 mm dia. unthreaded flange
OE-300-S	customized versions available on request

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



Datasheet

OE-300-SI-30

100 MHz Variable Gain Photoreceiver

Available Accessories

PRA-FSMA
PRA-FC



fiber-adapter with external
1.035"-40 thread

PRA-PAP



post adapter plate,
easy to mount on
FEMTO photoreceiver series
OE, FWPR, HCA-S and LCA-S

PS-15




power supply,
input: 100 - 240 VAC,
output: ± 15 VDC, $+400/-250$ mA

LUCI-10



compact digital I/O interface for USB remote control,
supports opto-isolation of amplifier signal path from PC
USB port, 16 digital outputs, 3 opto-isolated digital inputs,
bus-powered operation



Specifications

Gain

Test conditions
Transimpedance gain
Gain accuracy

$V_s = \pm 15$ V, $T_A = 25$ °C, system impedance = 50 Ω
 $1 \times 10^2 \dots 1 \times 10^8$ V/A
 ± 1 %

Frequency Response

Lower cut-off frequency
Upper cut-off frequency

DC/100 Hz, switchable
up to 100 MHz (see table below),
switchable to 1 MHz or 10 MHz

Input

Noise equivalent power (NEP)
Max. CW saturation power

see table below
see table below

Detector

Detector
Active area

Si-PIN photodiode
3 mm dia. (7.1 mm²)

Spectral response
Sensitivity R
Dark current

320 - 1000 nm
0.59 A/W typ. @ 850 nm
0.1 nA typ.

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

FEMTO

Datasheet

OE-300-SI-30

100 MHz Variable Gain Photoreceiver

Specifications (continued)

Performance Depending
on Gain Setting

Gain setting (low noise) (V/A)	10 ²	10 ³	10 ⁴	10 ⁵	10 ⁶	10 ⁷
Upper cut-off frequency (-3 dB)	100 MHz	60 MHz	14 MHz	3.5 MHz	1.8 MHz	220 kHz
NEP ($\sqrt{\text{Hz}}$, @ 850 nm)	325 pW	26 pW	3.2 pW	745 fW	292 fW	89 fW
Measured at	10 MHz	6 MHz	1.4 MHz	350 kHz	180 kHz	22 kHz
Integrated input noise (RMS)*	5.5 μW	430 nW	56 nW	8.7 nW	1.9 nW	130 pW
CW sat. power (@ 850 nm)	10 mW	1.7 mW	170 μW	17 μW	1.7 μW	170 nW
Gain setting (high speed) (V/A)	10 ³	10 ⁴	10 ⁵	10 ⁶	10 ⁷	10 ⁸
Upper cut-off frequency (-3 dB)	80 MHz	60 MHz	14 MHz	3.5 MHz	1.8 MHz	220 kHz
NEP ($\sqrt{\text{Hz}}$, @ 850 nm)	232 pW	11 pW	2.4 pW	700 fW	245 fW	81 fW
Measured at	8 MHz	6 MHz	1.4 MHz	350 kHz	180 kHz	22 kHz
Integrated input noise (RMS)*	3.6 μW	275 nW	54 nW	8.6 nW	1.9 nW	130 pW
CW sat. power (@ 850 nm)	1.7 mW	170 μW	17 μW	1.7 μW	170 nW	17 nW

* The integrated input noise is measured with a shaded input in the full bandwidth ("FBW") setting (referred to 850 nm). The measurement bandwidth is 3 x the upper cut-off frequency at the specific gain setting; filter slope is a 1st order roll-off.

The input referred peak-peak noise can be calculated from the RMS noise as follows:

$$P_{\text{Input noise peak-to-peak}} = P_{\text{Input noise RMS}} \times 6$$

The output noise is given by:

$$U_{\text{Output noise RMS}} = P_{\text{Input noise RMS}} \times \text{gain} \times R$$

$$U_{\text{Output noise peak-to-peak}} = U_{\text{Output noise RMS}} \times 6 = P_{\text{Input noise RMS}} \times \text{gain} \times R \times 6$$

The integrated noise will be reduced considerably by setting the low pass filter to "1 MHz" or "10 MHz" instead of "FBW". This is especially useful for continuous wave (CW) measurements.

Output	Output voltage range	± 1 V (@ 50 Ω load), for linear amplification
	Output impedance	50 Ω (designed for 50 Ω load)
	Slew rate	1000 V/ μs
	Max. output current	± 40 mA
	Output offset compensation	adjustable by offset potentiometer and external control voltage, output offset compensation range min. ± 100 mV
Ext. Offset Control	Control voltage range	± 10 V
	Offset control input impedance	15 k Ω
Indicator LED	Function	overload
Digital Control	Control input voltage range	LOW bit: -0.8 ... +1.2 V, HIGH bit: +2.3 ... +12 V
	Control input current	0 mA @ 0 V, 1.5 mA @ +5 V, 4.5 mA @ +12 V
	Overload output	non active: <0.4 V @ 0 ... -1 mA active: typ. 5 ... 5.1 V @ 0 ... 2 mA
Power Supply	Supply voltage	± 15 V
	Supply current	+110/-90 mA (depends on operating conditions, recommended power supply capability min ± 200 mA)
	Stabilized power supply output	± 12 V, max. 20 mA, +5 V, max. 150 mA
Case	Weight	320 g (0.74 lb.)
	Material	AlMg4.5Mn, nickel-plated

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



Datasheet

OE-300-SI-30


100 MHz Variable Gain Photoreceiver

Specifications (continued)

Input Flange	Material	1.4305 stainless steel, glass bead blasted (1.035"-40 threaded flange) AlMg4.5Mn, nickel-plated (25 mm dia. unthreaded flange)	
Coupler Ring	Material	1.4305 stainless steel, glass bead blasted	
DC Monitor Output	Monitor output gain	<u>Mode</u>	<u>Monitor gain</u>
		Low noise	Gain setting divided by -1
		High speed	Gain setting divided by -10
Temperature Range	Monitor output polarity	inverting	
	Monitor output voltage range	±1 V (@ ≥1 MΩ load)	
	Monitor output bandwidth	DC ... 1 kHz	
	Monitor output impedance	1 kΩ (designed for ≥1 MΩ load)	
	Storage temperature	-40 ... +80 °C	
	Operating temperature	0 ... +60 °C	

Absolute Maximum Ratings	Max. CW power (averaged)	12 mW
	Digital control input voltage	-5 V/+16 V relative to digital ground DGND (pin 9)
	Analog control input voltage	±15 V relative to analog ground AGND (pin 3)
	Power supply voltage	±20 V

Connectors	Input	OE-300-SI-30-FST	1.035"-40 threaded flange for free space applications and for use with various types of fiber connector adapters
		OE-300-SI-30-FS	25 mm unthreaded round flange for free space applications
	Output	BNC jack (female)	
	Power supply	Lemo® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)	



Control port	Control port	Sub-D 25-pin, female, qual. class 2
		Pin 1: +12 V (stabilized power supply output)
		Pin 2: -12 V (stabilized power supply output)
		Pin 3: AGND (analog ground for pins 1 - 8)
		Pin 4: +5 V (stabilized power supply output)
		Pin 5: digital output: overload (referred to pin 3)
		Pin 6: DC Monitor output
		Pin 7: NC (= not connected)
		Pin 8: output offset control voltage input
		Pin 9: DGND (ground for digital control pins 10 - 16)
		Pin 10: digital control input: gain, LSB
		Pin 11: digital control input: gain
		Pin 12: digital control input: gain, MSB
		Pin 13: digital control input: AC/DC
		Pin 14: digital control input: high speed / low noise
		Pin 15: upper cut-off frequency limit 10 MHz
		Pin 16: upper cut-off frequency limit 1 MHz
	Pin 17 - 25: NC (= not connected)	

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY




Datasheet

OE-300-SI-30

100 MHz Variable Gain Photoreceiver

Scope of Delivery	OE-300-SI-30, threaded coupler ring ("FST" version only), Lemo® 3-pin connector, datasheet, transport package				
Remote Control Operation	General	Remote control input bits are opto-isolated and connected by a logical OR function to the local switch settings. For remote control set the corresponding local switches to "Remote", "DC", "L" (low noise mode) and "FBW", and select the desired setting via a bit code at the corresponding digital inputs. Mixed operation, e.g. local AC/DC setting and remote controlled gain setting, is also possible.			
	Gain setting	Low noise Gain (V/A) Pin 14=LOW	High speed Gain (V/A) Pin 14=HIGH	Pin 12 MSB	Pin 11 Pin 10 LSB
		10 ²	10 ³	LOW	LOW LOW
		10 ³	10 ⁴	LOW	LOW HIGH
		10 ⁴	10 ⁵	LOW	HIGH LOW
	10 ⁵	10 ⁶	LOW	HIGH HIGH	
	10 ⁶	10 ⁷	HIGH	LOW LOW	
	10 ⁷	10 ⁸	HIGH	LOW HIGH	
	AC/DC setting	Coupling	Pin 13		
		DC	LOW		
		AC	HIGH		
	Low pass filter setting	Upper cut-off freq. limit	Pin 15	Pin 16	
		full bandwidth	LOW	LOW	
		10 MHz	HIGH	LOW	
		1 MHz	LOW	HIGH	
	High speed / low noise setting	Mode	Pin 14		
		low noise mode	LOW		
		high speed mode	HIGH		

Spectral Responsivity

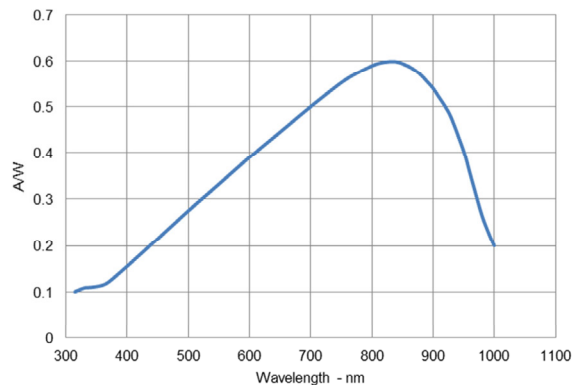

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



Datasheet

OE-300-SI-30


100 MHz Variable Gain Photoreceiver

Typical Performance
Characteristic


Frequency response

$$V_{\text{Supply}} = \pm 15 V_{\text{DC}}; R_{\text{Load}} = 50 \Omega$$


Gain setting: L10², H10³




Gain setting: L10³, H10⁴




Gain setting: L10⁴, H10⁵




Gain setting: L10⁵, H10⁶



Gain setting: L10⁶, H10⁷



Gain setting: L10⁷, H10⁸



SOPHISTICATED TOOLS FOR SIGNAL RECOVERY









Datasheet

OE-300-SI-30

100 MHz Variable Gain Photoreceiver

Typical Performance
Characteristic (continued)

Input noise equivalent power (NEP)



SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



Datasheet


OE-300-SI-30

100 MHz Variable Gain Photoreceiver

Typical Performance
Characteristic (continued)


Signal pulse response

Gain setting L10²




Rise: 3.35 ns Fall: 3.36 ns

Gain setting H10³




Rise: 3.51 ns Fall: 3.55 ns

Gain setting L10³




Rise: 5.83 ns Fall: 5.87 ns

Gain setting H10⁴




Rise: 6.03 ns Fall: 6.06 ns

Gain setting L10⁴



Rise: 22.73 ns Fall: 22.58 ns

Gain setting H10⁵



Rise: 23.14 ns Fall: 22.98 ns

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY




Datasheet

OE-300-SI-30

100 MHz Variable Gain Photoreceiver


Typical Performance
Characteristic (continued)

Gain setting L10⁵




Rise: 73.72 ns Fall: 73.76 ns

Gain setting H10⁶




Rise: 73.76 ns Fall: 74.36 ns

Gain setting L10⁶




Rise: 202.64 ns Fall: 203.04 ns

Gain setting H10⁷




Rise: 201.28 ns Fall: 202.88 ns

Gain setting L10⁷



Rise: 1656.0 ns Fall: 1636.8 ns

Gain setting H10⁸



Rise: 1631.2 ns Fall: 1699.2 ns

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY




Datasheet

OE-300-SI-30

100 MHz Variable Gain Photoreceiver

Dimensions


Threaded free space input OE-300-SI-30-FST:

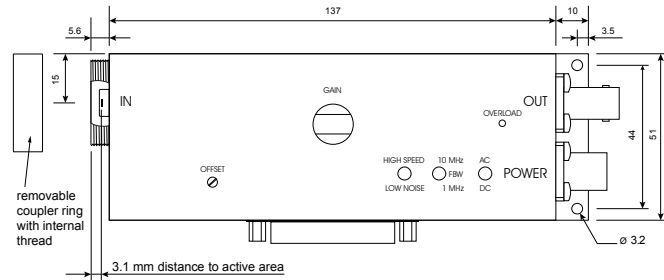

All measurements in mm unless otherwise noted.

DZ-OE-300-SI-30-FST_R1

Free space input OE-300-SI-30-FS:

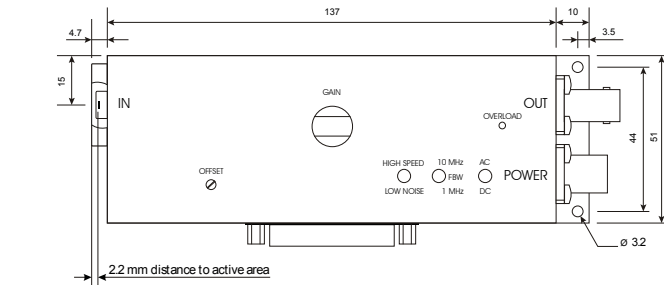

All measurements in mm unless otherwise noted.

DZ-OE-300-SI-30-FS_R1

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

