


Datasheet

HSA-X-1-40

1.2 GHz High-Speed Amplifier

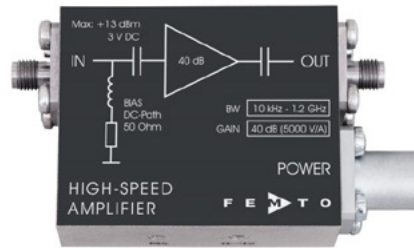


Features

- Bandwidth 10 kHz ... 1.2 GHz
- Rise time 290 ps
- Gain 40 dB
- Noise figure 1.7 dB
- Integrated bias circuit

Applications

- Pre-amplifier for ultra-fast detectors (microchannel-plates, photomultipliers, avalanche-photodiodes and PIN-photodiodes)
- Oscilloscope and transient-recorder pre-amplifier
- Time-resolved pulse and transient measurements

Block Diagram

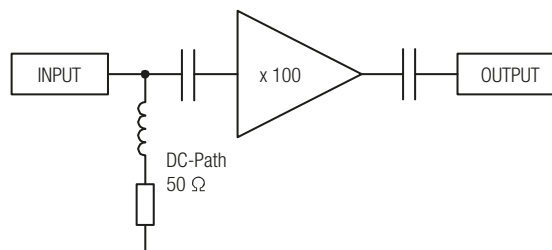

Specifications

	Test conditions	$V_s = +15\text{ V}$ , $T_A = 25^\circ\text{C}$ , system impedance = 50 $\Omega$	
Gain	Gain	40 dB (x 100)	
	Transimpedance gain	5,000 V/A	(40 dB x 50 $\Omega$ )
	Gain accuracy	$\pm 1\text{ dB}$	
Frequency Response	Lower cut-off frequency (-3 dB)	10 kHz	( $\pm 20\%$ )
	Upper cut-off frequency (-3 dB)	1.2 GHz	( $\pm 15\%$ )
	Rise/fall time (10% - 90%)	290 ps	
Input	DC input impedance	50 $\Omega$	
	RF input impedance	50 $\Omega$	
	50 $\Omega$ noise figure	1.7 dB	(@ $f < 700\text{ MHz}$ )
	Equivalent input voltage noise	310 pV/ $\sqrt{\text{Hz}}$	(@ $f < 700\text{ MHz}$ )
	Input VSWR	1.6 : 1	(@ $f < 2\text{ GHz}$ )
	Input return loss	13 dB	(@ $f < 2\text{ GHz}$ )

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



DE-HSA-X-1-40\_R2/LK/JM/220CT2015

**Datasheet**

**HSA-X-1-40**


**1.2 GHz High-Speed Amplifier**

Output	Output impedance            50 Ω Output VSWR                    1.35 : 1    (@ f < 1.2 GHz) Output return loss            16.5 dB    (@ f < 1.2 GHz) Output power P <sub>1dB</sub> +12.5 dBm    (@ f < 500 MHz) Output peak-to-peak voltage    2.0 V <sub>pp</sub> (@ f < 500 MHz, for linear amplification) Output noise                    typ. 2.1 mV <sub>RMS</sub> or 14 mV <sub>pp</sub> * (measurement BW: 4 GHz)
Power Supply	Supply voltage                +15 V Supply current                +140 mA
Case	Weight                         100 g (0.23 lbs) Material                        AlMg4.5Mn, nickel-plated
Temperature Range	Storage temperature        -40 ... +100 °C Operating ambient temperature 0 ... +60 °C

\* The peak-to-peak output noise is derived from the RMS noise as follows:  $V_{pp} = V_{RMS} \times 6.6$  (99.9% of the time the output noise voltage will be within the specified peak-to-peak value.)

Absolute Maximum Ratings	Power supply voltage        +18.5 V DC and LF input voltage    ±3 V RF input power                +13 dBm
--------------------------	---

Connectors	Input                            SMA, jack (female) Output                          SMA, jack (female) Power supply                   Lemo® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52) Pin 1:                    +15 V Pin 2:                    NC Pin 3:                    GND
------------	--



SOPHISTICATED TOOLS FOR SIGNAL RECOVERY




**Datasheet**

**HSA-X-1-40**

**1.2 GHz High-Speed Amplifier**

Dimensions

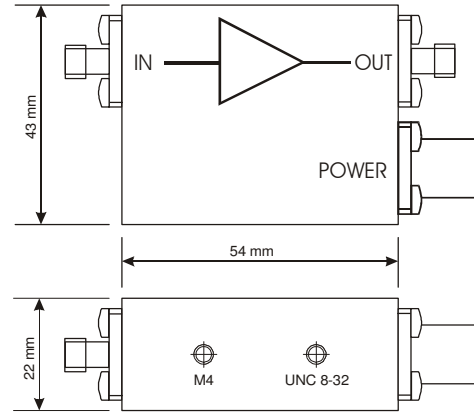

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH - Printed in Germany

**SOPHISTICATED TOOLS FOR SIGNAL RECOVERY**

