


## Datasheet

## HBPR-200M-30K-SI-FST

### High-Speed Balanced Photoreceiver

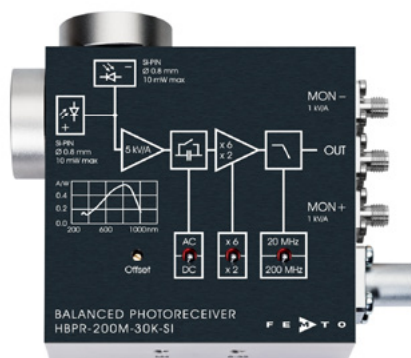


#### Features

- Bandwidth DC to 200 MHz
- Common-Mode Rejection Ratio (CMRR) 45 dB typ.
- Si-PIN detectors, 0.8 mm active diameter
- Spectral range 320 – 1000 nm
- Very low NEP, down to 6.5 pW/√Hz
- Transimpedance gain switchable  $10 \times 10^3$  V/A,  $30 \times 10^3$  V/A
- High dynamic input range up to  $2 \times 10$  mW balanced optical power
- Fast monitor outputs with 10 MHz bandwidth and  $1 \times 10^3$  V/A gain
- Switchable low pass filter for minimizing wideband noise
- Free-space input 1.035"-40 threaded, easily convertible to fiber optic input (FC and FSMA) with optionally available screw-on adapters
- UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread

#### Applications

- Spectroscopy
- Heterodyne detection
- Optical coherence tomography (OCT)
- Optical delay measurement
- Differential optical front-end for oscilloscopes, spectrum analyzers, A/D converters and RF lock-in amplifiers

#### Block Diagram

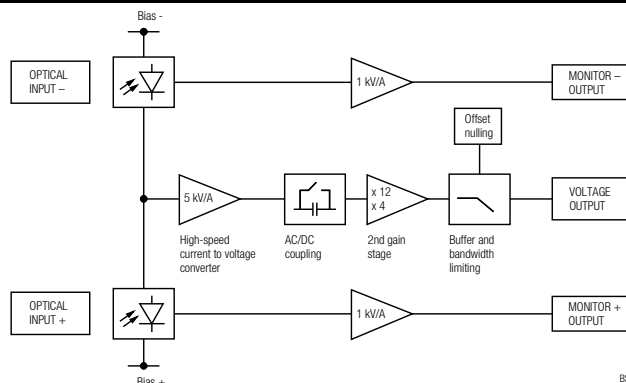

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

**F E M T O**

HBPR-200M-30K-SI-FST\_R3/TH\_JMa/05MAR2024

## Datasheet

## HBPR-200M-30K-SI-FST

### High-Speed Balanced Photoreceiver

#### Intended Use

The HBPR-200M-30K-SI-FST photoreceiver consists of a combination of two anti-parallel connected photodiodes with a subsequent low-noise transimpedance amplifier. It is designed for fast conversion of the tiny difference of two optical signals into an equivalent output voltage. Operation is mostly self-explanatory. If in doubt, consult this document or contact [support@femto.de](mailto:support@femto.de).

For safe operation, please refer to the damage thresholds specified in the "Absolute Maximum Ratings", "Temperature Range" and "Power Supply" sections of this document.

The operating environment must be free of smoke, dust, grease, oil, condensing moisture, and other contaminants that could affect the operation or performance.

#### Application Notes

The damage threshold of 12 mW for each photodiode mentioned in the "Absolute Maximum Ratings" section applies to reasonably homogeneous illumination of the photodiodes. Extreme focusing of the light beam can lead to damage to the photodiodes, even at significantly lower light power.

To achieve optimum performance, it is recommended that the CW light intensity at both inputs be well balanced. The monitor outputs can be used for continuous balance control. For setups with arbitrarily varying CW offset, the photoreceiver's AC mode can be helpful. Using AC mode increases the CW offset range to 850  $\mu$ W (@ 850 nm), regardless of the gain setting.

#### Available Version

HBPR-200M-30K-SI-FST



1.035"-40 threaded flanges with internally threaded coupler rings mounted (outer dia. 30 mm), for free space applications, compatible with many optical standard accessories

Optional: fiber adapters PRA-FC, PRA-FCA, PRA-FSMA



#### Related Models

Various free space or fiber coupled HBPR models, with bandwidth up to 500 MHz, in the spectral range from 320 nm to 1700 nm are available.

#### Si Versions

Fiber-coupled with fix/permanent FC fiber connectors

HBPR-100M-60K-SI-FC Si-PIN  $\varnothing$  0.8 mm, DC – 100 MHz, 320 – 1000 nm, CMRR 50 dB, gain  $2.0 \times 10^4 / 6.0 \times 10^4$  V/A switchable

HBPR-200M-30K-SI-FC Si-PIN  $\varnothing$  0.8 mm, DC – 200 MHz, 320 – 1000 nm, CMRR 45 dB, gain  $1.0 \times 10^4 / 3.0 \times 10^4$  V/A switchable

HBPR-500M-10K-SI-FC Si-PIN  $\varnothing$  0.4 mm, DC – 500 MHz, 320 – 1000 nm, CMRR 40 dB, gain  $5.0 \times 10^3 / 10.0 \times 10^3$  V/A switchable

Free space versions with 1.035"-40 threaded flanges

HBPR-100M-60K-SI-FST Si-PIN  $\varnothing$  0.8 mm, DC – 100 MHz, 320 – 1000 nm, CMRR 50 dB, gain  $2.0 \times 10^4 / 6.0 \times 10^4$  V/A switchable

HBPR-500M-10K-SI-FST Si-PIN  $\varnothing$  0.4 mm, DC – 500 MHz, 320 – 1000 nm, CMRR 40 dB, gain  $5.0 \times 10^3 / 10.0 \times 10^3$  V/A switchable

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

**F E M T O**

HBPR-200M-30K-SI-FST\_R3/TH\_JMa/05MAR2024

## Datasheet

## HBPR-200M-30K-SI-FST

### High-Speed Balanced Photoreceiver

#### Related Models (continued)

##### InGaAs Versions

Fiber-coupled with fix/permanent FC fiber connectors (ball lense coupled)

HBPR-100M-60K-IN-FC InGaAs-PIN  $\varnothing$  0.08 mm, DC – 100 MHz, 900 – 1700 nm, CMRR 55 dB, gain  $2.0 \times 10^4 / 6.0 \times 10^4$  V/A switchable

HBPR-200M-30K-IN-FC InGaAs-PIN  $\varnothing$  0.08 mm, DC – 200 MHz, 900 – 1700 nm, CMRR 50 dB, gain  $1.0 \times 10^4 / 3.0 \times 10^4$  V/A switchable

HBPR-500M-10K-IN-FC InGaAs-PIN  $\varnothing$  0.08 mm, DC – 500 MHz, 900 – 1700 nm, CMRR 45 dB, gain  $5.0 \times 10^3 / 10.0 \times 10^3$  V/A switchable

Free space versions with 1.035"-40 threaded flanges

HBPR-100M-60K-IN-FST InGaAs-PIN  $\varnothing$  0.3 mm, DC – 100 MHz, 800 – 1700 nm, CMRR 50 dB, gain  $2.0 \times 10^4 / 6.0 \times 10^4$  V/A switchable

HBPR-200M-30K-IN-FST InGaAs-PIN  $\varnothing$  0.3 mm, DC – 200 MHz, 800 – 1700 nm, CMRR 45 dB, gain  $1.0 \times 10^4 / 3.0 \times 10^4$  V/A switchable

HBPR-450M-10K-IN-FST InGaAs-PIN  $\varnothing$  0.3 mm, DC – 450 MHz, 800 – 1700 nm, CMRR 35 dB, gain  $5.0 \times 10^3 / 10.0 \times 10^3$  V/A switchable

#### Available Accessories

PRA-FC  
PRA-FCA  
PRA-FSMA



Fiber-adapter with external  
1.035"-40 thread

PS-15-25-L



Power Supply  
Input: 100 – 240 VAC  
Output:  $\pm 15$  VDC

#### Specifications

##### Test conditions

$V_s = \pm 15$  V,  $T_A = 25$  °C, output load impedance  $50 \Omega$ , warm-up 20 minutes (min. 10 minutes recommended), monitor outputs terminated with  $1 M\Omega$

##### Gain

##### Transimpedance gain

$10 \times 10^3$  V/A (@ 2<sup>nd</sup> gain  $\times 2$ ,  $50 \Omega$  load)

$30 \times 10^3$  V/A (@ 2<sup>nd</sup> gain  $\times 6$ ,  $50 \Omega$  load)

##### Gain accuracy

$\pm 1$  % electrical

##### Conversion gain

$5.4 \times 10^3$  V/W typ. (@ 2<sup>nd</sup> gain  $\times 2$ , 850 nm,  $50 \Omega$  load)

$16.2 \times 10^3$  V/W typ. (@ 2<sup>nd</sup> gain  $\times 6$ , 850 nm,  $50 \Omega$  load)

##### Common mode rejection ratio (CMRR)

50 dB typ. ( $f \leq 100$  MHz)

45 dB typ. ( $f \leq 200$  MHz)

##### Frequency Response

##### Lower cut-off frequency

DC / 10 Hz, switchable

##### Upper cut-off frequency (–3 dB)

200 MHz / 20 MHz, switchable

##### Time Response

##### Rise/fall time (10 % – 90 %)

1.75 ns (@ 2<sup>nd</sup> gain  $\times 2$ ); 1.85 ns (@ 2<sup>nd</sup> gain  $\times 6$ )

17.5 ns (@ bandwidth set to 20 MHz)

##### Input

##### Noise equivalent power (NEP)

minimum 7.8 pW/√Hz (@ 850 nm)

8.8 pW/√Hz (@ 850 nm, 20 MHz)

19.0 pW/√Hz (@ 850 nm, 100 MHz)

33.0 pW/√Hz (@ 850 nm, 200 MHz)

##### Maximum differential CW power (for linear amplification)

185  $\mu$ W (@ 2<sup>nd</sup> gain  $\times 2$ , DC-coupled, 850 nm)

62  $\mu$ W (@ 2<sup>nd</sup> gain  $\times 6$ , DC-coupled, 850 nm)

850  $\mu$ W (@ AC-coupled, 850 nm)

##### Max. optical CW balanced power (common mode power)

10 mW (on each photodiode, @ 850 nm)

##### Monitor optical saturation power

12 mW (@ 850 nm) (limited by maximum ratings)

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

**F E M T O**

HBPR-200M-30K-SI-FST\_R3/TH\_JMa/05MAR2024

## Datasheet

## HBPR-200M-30K-SI-FST


### High-Speed Balanced Photoreceiver

#### Specifications (continued)

|                         |                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Detector                | Detector type<br>Active area<br>Spectral range<br>Sensitivity                                                                                                                      | Si-PIN photodiode<br>$\varnothing 800 \mu\text{m}$<br>320 – 1000 nm<br>0.54 A/W typ. (@ 850 nm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Output                  | Output voltage range<br>Max. output voltage<br>Offset voltage compensation<br>Output impedance<br>Slew rate<br>Max. output current<br>Output reflection S22<br>Output noise (typ.) | $\pm 1.0 \text{ V}$ (@ 50 $\Omega$ load)<br>for linear operation and low harmonic distortion<br>$\pm 2.0 \text{ V}$ (@ 50 $\Omega$ load)<br>$\pm 100 \text{ mV}$ typ., adjustable by offset potentiometer<br>50 $\Omega$ (terminate with 50 $\Omega$ load)<br>2800 V/ $\mu\text{s}$<br>70 mA<br>$-30 \text{ dB}$ @ < 100 MHz<br>$-20 \text{ dB}$ @ < 800 MHz<br>2.0 mV RMS (13 mV peak-peak) (@ 2 <sup>nd</sup> gain $\times 2$ )<br>5.5 mV RMS (36 mV peak-peak) (@ 2 <sup>nd</sup> gain $\times 6$ )<br>0.3 mV RMS (2.0 mV peak-peak) (@ 2 <sup>nd</sup> gain $\times 2$ , BW 20 MHz)<br>0.8 mV RMS (5.3 mV peak-peak) (@ 2 <sup>nd</sup> gain $\times 6$ , BW 20 MHz)<br>(@ 50 $\Omega$ load, no signal on detectors, measurement bandwidth 2 GHz) |
| Monitor Outputs         | Gain<br>Voltage range<br>Output impedance<br>Max. output current<br>Bandwidth<br>Output noise                                                                                      | $1 \times 10^3 \text{ V/A}$ (@ $\geq 100 \text{ k}\Omega$ load)<br>0 ... +10 V (@ $\geq 100 \text{ k}\Omega$ load)<br>50 $\Omega$ (terminate with $\geq 100 \text{ k}\Omega$ load)<br>30 mA typ.<br>DC – 10 MHz<br>0.6 mV RMS (4 mV peak-peak)<br>(@ 100 $\text{k}\Omega$ load, no signal on detectors, measurement bandwidth 200 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                |
| Power Supply            | Supply voltage<br>Supply current                                                                                                                                                   | $\pm 15 \text{ V}$ ( $\pm 14.5 \text{ V}$ ... $\pm 16.5 \text{ V}$ )<br>$-90 / +120 \text{ mA}$ typ. (depends on operating conditions, recommended power supply capability min. $\pm 200 \text{ mA}$ )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Optical Input Connector | Material FST flange<br>Material FST coupler ring                                                                                                                                   | 1.4305 stainless steel, nickel-plated<br>1.4305 stainless steel, glass bead blasted                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Case                    | Weight<br>Material                                                                                                                                                                 | 410 g (0.9 lbs) including coupler rings<br>AlMg3Mn, nickel-plated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Temperature Range       | Storage temperature<br>Operating temperature                                                                                                                                       | $-40 \text{ }^\circ\text{C}$ ... $+85 \text{ }^\circ\text{C}$<br>$0 \text{ }^\circ\text{C}$ ... $+60 \text{ }^\circ\text{C}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

|                          |                                                  |                                                  |
|--------------------------|--------------------------------------------------|--------------------------------------------------|
| Absolute Maximum Ratings | Optical input power (CW)<br>Power supply voltage | 12 mW (on each photodiode)<br>$\pm 20 \text{ V}$ |
|--------------------------|--------------------------------------------------|--------------------------------------------------|

|            |                                   |                                                                                                                                                                                                                             |
|------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connectors | Inputs<br>Outputs<br>Power supply | 1.035"-40 threaded flanges for free space applications and for use with various types of optical standard accessories<br>SMA jacks (female)<br>LEMO® series 1S, 3-pin fixed socket<br>(mating plug type: FFA.1S.303.CLAC52) |
|------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



Pin 1: +15 V  
 Pin 2: -15 V  
 Pin 3: GND


SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

**F E M T O**

HBPR-200M-30K-SI-FST\_R3/TH\_JMa/05MAR2024

**Datasheet**
**HBPR-200M-30K-SI-FST**
**High-Speed Balanced Photoreceiver**

|                      |                                                                                                                           |                                                                                                                       |
|----------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Scope of Delivery    | HBPR-200M-30K-SI-FST, 2 × threaded coupler ring, Lemo® 3-pin connector, 3 × adapter SMA (male) to BNC (female), datasheet |                                                                                                                       |
| Ordering Information | HBPR-200M-30K-SI-FST                                                                                                      | 1.035"-40 threaded flanges for free space applications and for use with various types of optical standard accessories |
| Spectral Response    | HBPR-200M-30K-SI-FST                                                                                                      |                                                                                                                       |

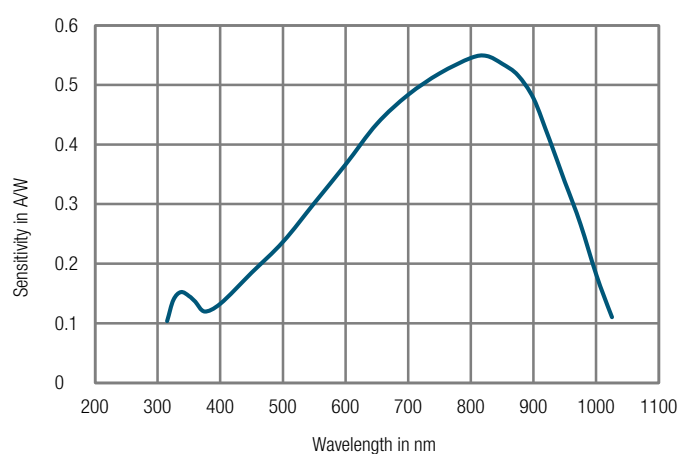
DB-Sens-HBPR-100-200-SI\_R2
**SOPHISTICATED TOOLS FOR SIGNAL RECOVERY**
**F E M T O**
HBPR-200M-30K-SI-FST\_R3/TH\_JMa/05MAR2024


## Datasheet

## HBPR-200M-30K-SI-FST

### High-Speed Balanced Photoreceiver

#### Dimensions

#### HBPR-200M-30K-SI-FST

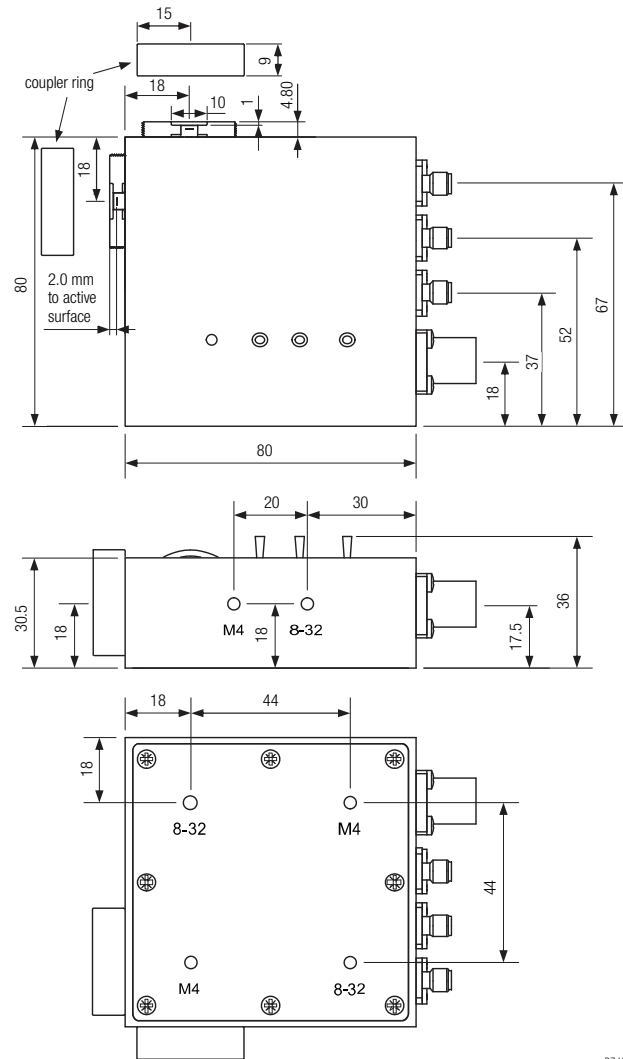

all dimensions in mm unless otherwise noted

DZ-HBPR\_FST\_R2

The bottom plate may be rotated to match the appropriate mounting thread to the optical axis by unscrewing the 8 screws.

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

**F E M T O**

HBPR-200M-30K-SI-FST\_R3/TH\_JMa/05MAR2024