



Datasheet

OE-200-IN1

Variable Gain Photoreceiver – Fast Optical Power Meter

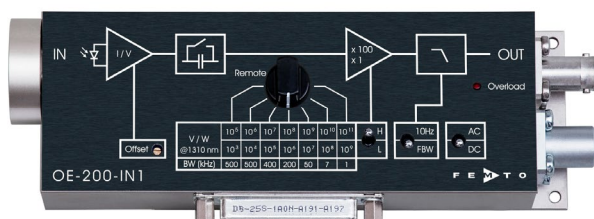

The picture shows model OE-200-IN1-FST

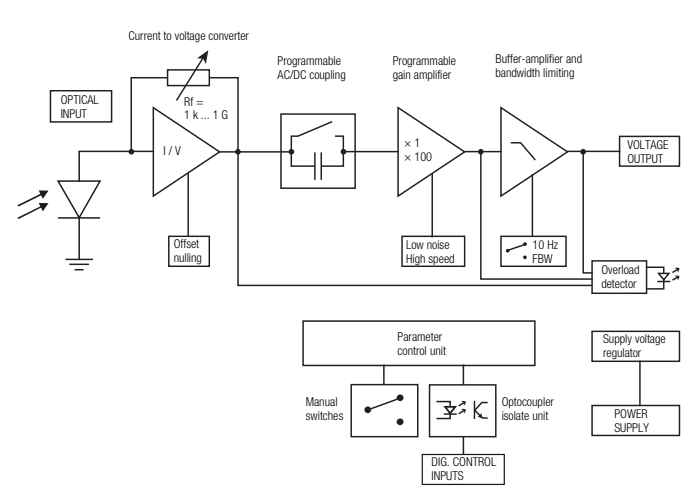Features	• InGaAs-PIN detector, active diameter 0.3 mm (FST version), 80 μm integrated ball lens (FC version) • Spectral range 900 - 1700 nm • Very low noise, NEP down to 7 fW/$\sqrt{\text{Hz}}$ • Bandwidth up to 500 kHz • Conversion gain adjustable from 1×10^3 up to 1×10^{11} V/W • Free-space input 1.035"-40 threaded • Fiber optic input available as permanently mounted FC-input • Factory calibrated at 1310 nm (fiber optic FC version only) • Full manual and remote control capability
Applications	• All-purpose very low-noise photoreceiver (O/E converter) • Time resolved optical pulse and power measurements • Optical front-end for oscilloscopes, spectrum analyzers, A/D converters and lock-in amplifiers • Fast fiber optic power meter
Block Diagram	 8801-OE-200_R7

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

F E M T O

OE-200-IN1_R22/TH,JMa/17APR2024

Datasheet
OE-200-IN1
**Variable Gain Photoreceiver –
Fast Optical Power Meter**

Intended Use	The OE-200-IN1 is a ultra-low noise variable gain photoreceiver. It is designed for fast and precise conversion of small optical signals into equivalent output voltages. Operation is mostly self-explanatory. If in doubt, consult this document or contact support@femto.de. For safe operation, please refer to the damage thresholds specified in the "Absolute Maximum Ratings", "Temperature Range" and "Power Supply" sections of this document. The operating environment must be free of smoke, dust, grease, oil, condensing moisture, and other contaminants that could affect the operation or performance.																			
Available Versions	OE-200-IN1-FST  1.035"-40 threaded flange with internally threaded coupler ring (outer diameter 30 mm) for free space applications, compatible with many optical standard accessories OE-200-IN1-FC  Fix/permanent FC fiber connector for high coupling efficiency and excellent conversion gain accuracy ($\pm 5\%$) Since illumination conditions with the permanently mounted fiber optic connector are well defined, the FC model is delivered with a factory calibrated conversion gain at 1310 nm. The electro optical conversion gain factor of the FST free space model is set to fit nominally at 1310 nm.																			
Related OE-200 Models	See separate datasheets for following models on www.femto.de: <table> <tr> <td>Si Versions</td><td>OE-200-SI-FST</td><td>Si-PIN, $\varnothing$ 1.2 mm, 320 - 1060 nm, conversion gain adjusted at 850 nm, free space input, 1.035"-40 threaded flange</td></tr> <tr> <td></td><td>OE-200-SI-FC</td><td>Si-PIN, $\varnothing$ 1.2 mm, 320 - 1060 nm, conversion gain calibrated at 850 nm, FC fiber connector (fix/permanent)</td></tr> <tr> <td></td><td>OE-200-UV-FST</td><td>Si-PIN, 1.1×1.1 mm², 190 - 1000 nm conversion gain adjusted at 850 nm, free space input, 1.035"-40 threaded flange</td></tr> <tr> <td></td><td>OE-200-UV-FC</td><td>Si-PIN, 1.1×1.1 mm², 190 - 1000 nm conversion gain calibrated at 850 nm, FC fiber connector (fix/permanent)</td></tr> <tr> <td>InGaAs Versions</td><td>OE-200-IN2-FST</td><td>InGaAs-PIN, $\varnothing$ 300 μm, 900 - 1700 nm, conversion gain adjusted at 1550 nm, free space input, 1.035"-40 threaded flange</td></tr> <tr> <td></td><td>OE-200-IN2-FC</td><td>InGaAs-PIN, integrated ball lens, 900 - 1700 nm, conversion gain calibrated at 1550 nm, FC fiber connector (fix/permanent)</td></tr> </table>		Si Versions	OE-200-SI-FST	Si-PIN, $\varnothing$ 1.2 mm, 320 - 1060 nm, conversion gain adjusted at 850 nm, free space input, 1.035"-40 threaded flange		OE-200-SI-FC	Si-PIN, $\varnothing$ 1.2 mm, 320 - 1060 nm, conversion gain calibrated at 850 nm, FC fiber connector (fix/permanent)		OE-200-UV-FST	Si-PIN, 1.1×1.1 mm ² , 190 - 1000 nm conversion gain adjusted at 850 nm, free space input, 1.035"-40 threaded flange		OE-200-UV-FC	Si-PIN, 1.1×1.1 mm ² , 190 - 1000 nm conversion gain calibrated at 850 nm, FC fiber connector (fix/permanent)	InGaAs Versions	OE-200-IN2-FST	InGaAs-PIN, $\varnothing$ 300 μ m, 900 - 1700 nm, conversion gain adjusted at 1550 nm, free space input, 1.035"-40 threaded flange		OE-200-IN2-FC	InGaAs-PIN, integrated ball lens, 900 - 1700 nm, conversion gain calibrated at 1550 nm, FC fiber connector (fix/permanent)
Si Versions	OE-200-SI-FST	Si-PIN, $\varnothing$ 1.2 mm, 320 - 1060 nm, conversion gain adjusted at 850 nm, free space input, 1.035"-40 threaded flange																		
	OE-200-SI-FC	Si-PIN, $\varnothing$ 1.2 mm, 320 - 1060 nm, conversion gain calibrated at 850 nm, FC fiber connector (fix/permanent)																		
	OE-200-UV-FST	Si-PIN, 1.1×1.1 mm ² , 190 - 1000 nm conversion gain adjusted at 850 nm, free space input, 1.035"-40 threaded flange																		
	OE-200-UV-FC	Si-PIN, 1.1×1.1 mm ² , 190 - 1000 nm conversion gain calibrated at 850 nm, FC fiber connector (fix/permanent)																		
InGaAs Versions	OE-200-IN2-FST	InGaAs-PIN, $\varnothing$ 300 μ m, 900 - 1700 nm, conversion gain adjusted at 1550 nm, free space input, 1.035"-40 threaded flange																		
	OE-200-IN2-FC	InGaAs-PIN, integrated ball lens, 900 - 1700 nm, conversion gain calibrated at 1550 nm, FC fiber connector (fix/permanent)																		

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY
F E M T O

OE-200-IN1_R22/TH, JMa/17APR2024

Datasheet

OE-200-IN1

Variable Gain Photoreceiver – Fast Optical Power Meter

Available Accessories

PRA-PAP



Alternative mounting option:
post adapter plate, easy to mount
on FEMTO photoreceiver series OE,
FWPR, PWPR, HCA-S and LCA-S

PS-15-25-L



Power Supply
Input: 100 – 240 VAC
Output: ±15 VDC

LUCI-10



Compact digital I/O interface for USB
remote control, supports opto-isolation of
amplifier signal path from PC USB port,
16 digital outputs, 3 opto-isolated digital
inputs, bus-powered operation

Specifications

Test conditions

$V_s = \pm 15 \text{ V}$, $T_A = 25 \text{ °C}$, output load impedance $1 \text{ M}\Omega$,
warm-up 20 minutes (min. 10 minutes recommended)

Gain

Conversion gain

$1 \times 10^3 \dots 1 \times 10^{11} \text{ V/W}$ (@ 1310 nm, output load $\geq 100 \text{ k}\Omega$)

Gain accuracy

$\pm 1 \%$ electrical, between settings

Conversion gain accuracy

OE-200-IN1-FST (@ $P_{\text{OPT}} \leq 2 \text{ mW}$, 1310 nm) $\pm 15 \%$ nominal
OE-200-IN1-FC (@ $P_{\text{OPT}} \leq 1 \text{ mW}$, 1310 nm) $\pm 5 \%$ guaranteed
by factory calibration, verified with SM 9/125, FC/APC, NA 0.13
Coupling efficiency depends on fiber type. When using FC/PC
fiber connector, coupling efficiency may differ slightly. Fibers
with core diameter larger than $62.5 \mu\text{m}$ will significantly reduce
the coupling efficiency.

Gain drift

see table below

Frequency Response

Lower cut-off frequency

DC / 1 Hz, switchable

Upper cut-off frequency (–3 dB)

up to 500 kHz (see table below), switchable to 10 Hz

Input

Input offset current (dark current)

2 pA typ.

Input offset drift

see table below

Input offset compensation range

$\pm 600 \text{ pA}$, adjustable by offset potentiometer or
 $\pm 400 \text{ pA}$, adjustable by external control voltage

Optical CW saturation power

see table below

Noise equivalent power (NEP)

see table below

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

F E M T O

OE-200-IN1_R22/TH,JMa/17APR2024

Datasheet
OE-200-IN1
**Variable Gain Photoreceiver –
Fast Optical Power Meter**
Specifications (continued)

 Performance depending
on Gain Setting

Gain setting (low noise) (V/W)**	10 ³	10 ⁴	10 ⁵	10 ⁶	10 ⁷	10 ⁸	10 ⁹
Upper cut-off frequency (–3 dB)	500 kHz	500 kHz	400 kHz	200 kHz	50 kHz	7 kHz	1.1 kHz
Rise/fall time (10 % - 90 %)	700 ns	700 ns	900 ns	1.8 µs	7 µs	50 µs	300 µs
NEP (√Hz)**	22 pW	2.7 pW	560 fW	170 fW	51 fW	16 fW	7 fW
Measured at	10 kHz	10 kHz	10 kHz	1 kHz	1 kHz	100 Hz	100 Hz
Integr. input noise (RMS)***	25 nW	3.2 nW	750 pW	200 pW	56 pW	8.3 pW	1.3 pW
Input offset drift (°C)**	40 nW	4 nW	0.4 nW	34 pW	3.4 pW	0.5 pW	0.4 pW
Gain drift (°C)	0.008%	0.008%	0.008%	0.01%	0.01%	0.01%	0.02%
Optical CW saturation power**	2 mW	1 mW	0.1 mW	10 µW	1 µW	0.1 µW	10 nW

Gain setting (high speed) (V/W)**	10 ⁵	10 ⁶	10 ⁷	10 ⁸	10 ⁹	10 ¹⁰	10 ¹¹
Upper cut-off frequency (–3 dB)	500 kHz	500 kHz	400 kHz	200 kHz	50 kHz	7 kHz	1.1 kHz
Rise/fall time (10 % - 90 %)	700 ns	700 ns	900 ns	1.8 µs	7 µs	50 µs	300 µs
NEP (√Hz)**	16 pW	2.2 pW	550 fW	170 fW	52 fW	16 fW	8 fW
Measured at	10 kHz	10 kHz	10 kHz	1 kHz	1 kHz	100 Hz	100 Hz
Integr. input noise (RMS)***	15 nW	2.2 nW	630 pW	180 pW	52 pW	7.5 pW	1.2 pW
Input offset drift (°C)**	40 nW	4 nW	0.4 nW	34 pW	3.4 pW	0.5 pW	0.4 pW
Gain drift (°C)	0.008%	0.008%	0.008%	0.01%	0.01%	0.01%	0.02%
Optical CW saturation power**	0.1 mW	10 µW	1 µW	0.1 µW	10 nW	1 nW	0.1 nW

** referred to 1310 nm

*** The integrated input noise is measured with a shaded input in the full bandwidth ("FBW") setting (referred to 1310 nm).

The input referred peak-peak noise can be calculated from the RMS noise as follows:

$$P_{\text{Input noise peak-to-peak}} = P_{\text{Input noise RMS}} \times 6$$

The output noise is given by:

$$U_{\text{Output noise RMS}} = P_{\text{Input noise RMS}} \times \text{gain}$$

$$U_{\text{Output noise peak-to-peak}} = U_{\text{Output noise RMS}} \times 6 = P_{\text{Input noise RMS}} \times \text{gain} \times 6$$

The integrated noise will be reduced considerably by setting the low pass filter to "10 Hz" instead of "FBW". This is especially useful for continuous wave (CW) measurements.

Detector

Detector type	InGaAs-PIN photodiode
Active area	∅ 300 µm (FST version) ∅ 80 µm, integrated ball lens (FC version)
Spectral range	900 - 1700 nm
Sensitivity (FST version)	0.87 A/W (@ 1310 nm) , 0.95 A/W (@ 1550 nm)
Sensitivity (FC version)	0.89 A/W (@ 1310 nm) , 0.97 A/W (@ 1550 nm)

Output

Output voltage	±10 V (@ ≥100 kΩ output load)
Output impedance	50 Ω (terminate with ≥100 kΩ load)
Max. output current	±30 mA (short-circuit proof)

Indicator LED

Function	overload
----------	----------

Digital Control

Control input voltage range	LOW bit: –0.8 V ... +1.2 V, HIGH bit: +2.3 V ... +12 V
Control input current	0 mA @ 0 V, 1.5 mA @ +5 V, 4.5 mA @ +12 V
Overload output	non active: <0.4 V @ 0 ... –1 mA active: typ. 5 ... 5.1 V @ 0 ... 2 mA

Ext. Offset Control

Control voltage range	±10 V
Offset control input impedance	20 kΩ
Conversion factor	40 pA/V



SOPHISTICATED TOOLS FOR SIGNAL RECOVERY
F E M T O

OE-200-IN1_R22/TH, JMa/17APR2024

Datasheet

OE-200-IN1

Variable Gain Photoreceiver – Fast Optical Power Meter

Specifications (continued)		
Optical Input Connector	Material FST flange Material FST coupler ring Material FC receptacle	1.4305 stainless steel, nickel-plated 1.4305 stainless steel, glass bead blasted nickel silver
Power Supply	Supply voltage Supply current	± 15 V (± 14.75 V ... ± 16.5 V) ± 110 / -80 mA typ. (depends on operating conditions, recommended power supply capability min. ± 200 mA)
Case	Weight Material	360 g (0.79 lbs) AlMg4.5Mn, nickel-plated
Temperature Range	Storage temperature Operating temperature	-40 °C ... $+80$ °C 0 °C ... $+60$ °C
Absolute Maximum Ratings	Optical input power (CW) Digital control input voltage Analog control input voltage Power supply voltage	20 mW -5 V / $+16$ V relative to digital ground DGND (pin 9) ± 15 V relative to analog ground AGND (pin 3) ± 20 V
Connectors	Input Output Power supply Control port	OE-200-IN1-FST 1.035"-40 threaded flange for free space applications OE-200-IN1-FC FC fiber optic connector BNC jack (female) LEMO® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)  Pin 1: $+15$ V Pin 2: -15 V Pin 3: GND Sub-D 25-pin, female, qual. class 2  Pin 1: $+12$ V (stabilized power supply output*) Pin 2: -12 V (stabilized power supply output*) Pin 3: AGND (analog ground) Pin 4: $+5$ V (stabilized power supply output*) Pin 5: digital output: overload (referred to pin 3) Pin 6: signal output (connected to BNC) Pin 7: NC Pin 8: input offset control voltage Pin 9: DGND (ground for digital control pins 10 - 14) Pin 10: digital control input: gain, LSB Pin 11: digital control input: gain Pin 12: digital control input: gain, MSB Pin 13: digital control input: AC/DC Pin 14: digital control input: high speed / low noise Pin 15 - 25: NC *stabilized power supply output current ± 12 V: max. ± 50 mA, $+5$ V: max. 30 mA

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY
F E M T O

OE-200-IN1_R22/TH,JMa/17APR2024

Datasheet

OE-200-IN1

Variable Gain Photoreceiver – Fast Optical Power Meter


Remote Control Operation	General	Remote control input bits are opto-isolated and connected by logical OR function to local switch settings. For remote control set the corresponding local switches to "Remote", "AC" and "H" (High speed) and select the wanted setting via a bit code at the corresponding digital inputs. Mixed operation, e.g. local gain setting and remote controlled AC/DC setting, is also possible. Switch setting "FBW / 10 Hz" of the low pass signal filter is not remote controllable.				
	Gain setting	Low noise Pin 14=HIGH gain (V/W)	High speed Pin 14=LOW gain (V/W)	Pin 12 MSB	Pin 11	Pin 10 LSB
		10 ³	10 ⁵	LOW	LOW	LOW
		10 ⁴	10 ⁶	LOW	LOW	HIGH
		10 ⁵	10 ⁷	LOW	HIGH	LOW
	Gain settling time	<150 ms				
	AC/DC setting	Coupling Pin 13				
		AC	LOW			
		DC	HIGH			

Scope of Delivery OE-200-IN1, internally threaded coupler ring (FST version only), LEMO® 3-pin connector, datasheet, transport package

Ordering Information

OE-200-IN1-FST	1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories.
OE-200-IN1-FC	FC fiber optic connector (fix/permanent, FC/PC and FC/APC compatible).


Conversion Gain OE-200-IN1-FST (1.035"-40 threaded free space input)

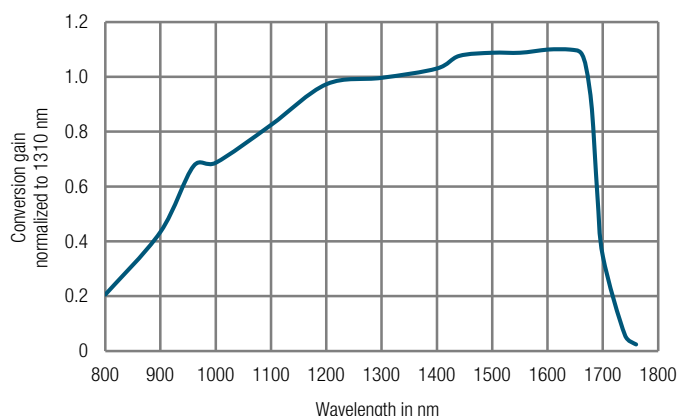
DB-Sens-OE-200-IN1-FST_R01
SOPHISTICATED TOOLS FOR SIGNAL RECOVERY
F E M T O
OE-200-IN1_R22/TH, JMa/17APR2024

Datasheet
OE-200-IN1
**Variable Gain Photoreceiver –
Fast Optical Power Meter**

Conversion Gain (continued)


OE-200-IN1-FC (FC fiber optic input)

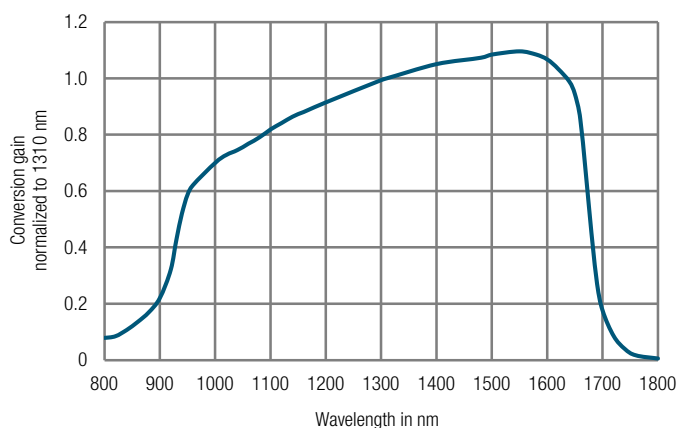

DB-Sens-OE-200-IN1-FC_R01

Dimensions

OE-200-IN1-FST (1.035"-40 threaded free space input)

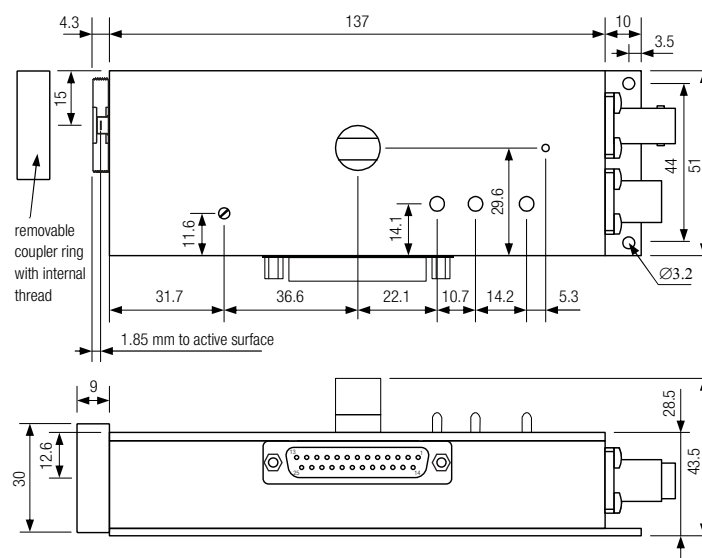

DZ-OE-200-FST_R1


SOPHISTICATED TOOLS FOR SIGNAL RECOVERY
F E M T O

OE-200-IN1_R22/TH,JMa/17APR2024

Datasheet
OE-200-IN1
**Variable Gain Photoreceiver –
Fast Optical Power Meter**

Dimensions (continued)

OE-200-IN1-FC (FC fiber optic input)

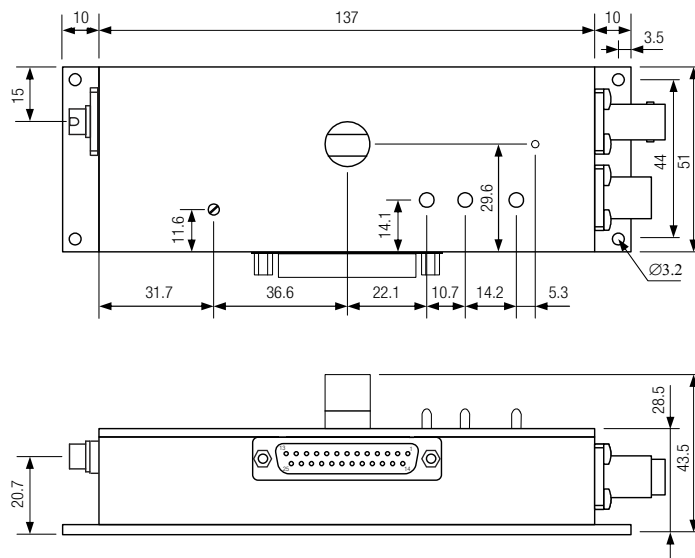

DZ-OE-200-FC_R06

all dimensions in mm unless otherwise noted

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY
F E M T O

OE-200-IN1_R22/TH, JMa/17APR2024