

Diode Lasers

PLM Series

COMPACT POWER STABILIZED
SINGLE-MODE SERIES—Red & NIR Wavelengths



Key Performance Features	Applications
<ul style="list-style-type: none"> • Ultra-Stable Power Output • Compact Single Box Design • Low Power Consumption • Several Wavelengths Available • Free-space or Fibered Outputs 	<ul style="list-style-type: none"> • Raman Excitation Source • Flow Cytometry • Semiconductor Processing • Real-time Process Control • Metrology

Center Wavelength	633 nm ±3 nm	637 nm ±5 nm	660 nm ±5 nm	785 nm ±10 nm
-------------------	-----------------	-----------------	-----------------	------------------

Diode Lasers

PLM Series

COMPACT POWER STABILIZED
SINGLE-MODE SERIES—Red & NIR Wavelengths

	Units	633 nm	637 nm	660 nm	785 nm
Operating Specifications					
Free-Space Output Power	mW	90	6	110	110
Fibered Output Power*	mW	35	3	45	45
Spectral linewidth (typical)	nm	1-2			
Wavelength stability (over 8 hours)	nm	±1			
Optical power stability (over 8 hours)**	% pk-pk	<2			
Noise (10Hz-100MHz)	% rms	0.2			
Adjustable Output Power		5-100%			

*See ordering information for options. Power value given for SMF version.
**APC mode

	Units	633 nm	637 nm	660 nm	785 nm
Free Space Optical Specifications					
Beam quality (m ² typical) vertical		1.2			
Beam quality (m ² typical) horizontal		1.1			
Beam size vertical	mm	1.2	2.4	1.2	1.2
Beam size horizontal	mm	0.6	0.6	0.8	0.6
Beam aspect ratio		2	4	1.5	2
Beam divergence—vertical	mrad	0.8	0.5	0.8	0.8
Beam divergence—horizontal	mrad	1.3			
Beam pointing stability (over 8 hours)	µrad	<50			
Beam pointing accuracy	degrees	1			
Polarization ratio	linear	100:1			

	Units	Value
Electrical Specifications		
DC input (max)		2.1A @ 3.3V
Warm-up time (typical)	sec	10
Power consumption (typical/max)	W	< 7
Interface—USB & 10-pin I/O connectors		

	Units	Value
Environmental Specifications		
Case temperature*	°C	10-40
Humidity (non-condensing)	%	5-95


*Must be operated on a heat sink

Diode Lasers

PLM Series

COMPACT POWER STABILIZED
SINGLE-MODE SERIES—Red & NIR Wavelengths

Weight = 134 grams Size = 86 cm³ (5.25 in³)

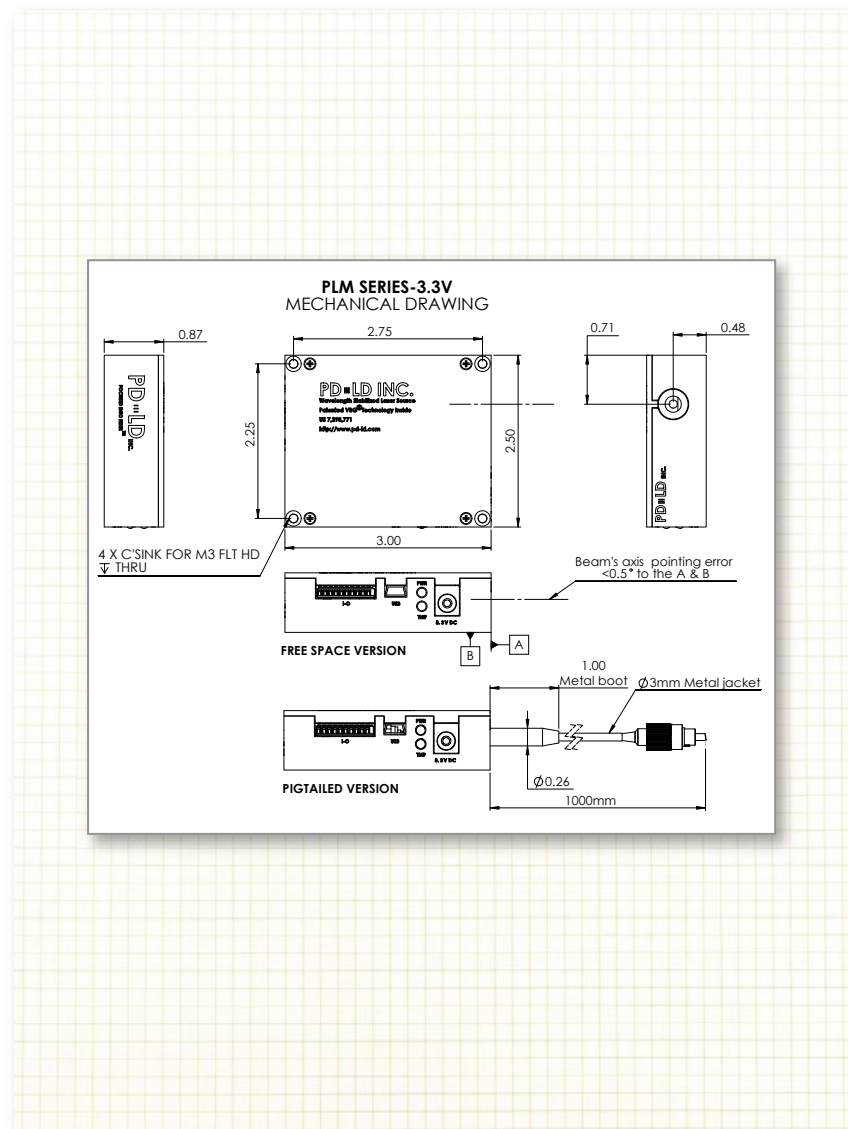

Diode Lasers

PLM Series

COMPACT POWER STABILIZED
SINGLE-MODE SERIES—Red & NIR Wavelengths



PD LD INC.,
Wavelength Stabilized Laser Source
Patented VBG[®] Technology Inside
US 7,298,771
<http://www.pd-ld.com>

Ordering Information

Part Number	Fiber Type	Wavelengths Available
PLM-XXX.X-SMF	4.3µm MFD	633, 637 and 660 nm
PLM-XXX.X-SMF	5.3µm MFD	785 nm
PLM-XXX.X-PMF	4.3µm MFD PANDA	633, 637 and 660 nm
PLM-XXX.X-PMF	5.3µm MFD PANDA	785 nm
PLM-XXX.X-MMF	50, 62.5 and 105µm MMF	All
PLM-XXX.X-FS	(Free-space)	All

Part Number System: PLM - XXX.X - XXX



Specific Wavelength Fiber Type or Free-space