

## Single-Window NxM Coupler/Splitter

(patents pending)

### Product Description

The FC Series Single Window Single Mode Wideband Tree/Star Coupler is based on Agiltron's fused biconical taper technology and compact packaging structure. It features high port count, good uniformity, low excess loss, and very low polarization sensitivity. The device is ideal for splitting or combining light with exceptional performance over a wide wavelength range.



### Features

- Excellent Uniformity
- Low Excess Loss
- Low Polarization Sensitivity
- Highly Stable & Reliable
- Ultra Low Cost

### Performance Specifications

FC Series (NxM) Coupler	Nx4	Nx8	Nx16	Nx32	Unit
Standard Configuration	N=1,2	N=1,2	N=1,2	N=1,2	
Operation Wavelength	1270-1350 or 1510-1590				nm
Maximum Insertion Loss <sup>[1]</sup>	7.2	10.8	14.5	18.0	dB
Maximum Uniformity	1.2	1.8	2.4	3.0	dB
Polarization Dependent Loss	0.3	0.5	0.6	0.8	dB
Directivity	> 55				dB
Optical Power	< 500				mW
Operating Temperature	-10-70				°C
Storage Temperature	-40-85				°C
Fiber Type and Length	Corning SMF28, Length >1				m
Package Dimension	See Package Table I, II				

[1]. without connector. Each connector adds 0.3dB and 0.5dB for short wavelength

### Applications

- Telecommunications
- CATV Fiberoptic Links
- Fiber Amplifier System
- Fiberoptic Instrumentation

Revised on 12/07/22


## Single-Window NxM Coupler/Splitter

Package Table I: SMF-28 fiber with 250 um or 900um outside diameter

Dimensions LxWxH (mm)	Port Configurations							
	1x3	1x4	1x8	1x16	1x32	2x4	2x8	2x16
88.9x51x9.2	◆	◆	◆			◆		
120x80x11.6							◆	
142x102x14.5				◆	◆			◆

Package Table II: SMF-28 fiber with 3 mm Cable

Dimensions LxWxH (mm)	Port Configurations							
	1x3	1x4	1x8	1x16	1x32	2x4	2x8	2x16
88.9x51x9.2	◆	◆				◆		
120x80x11.6			◆				◆	
142x102x14.5				◆				◆

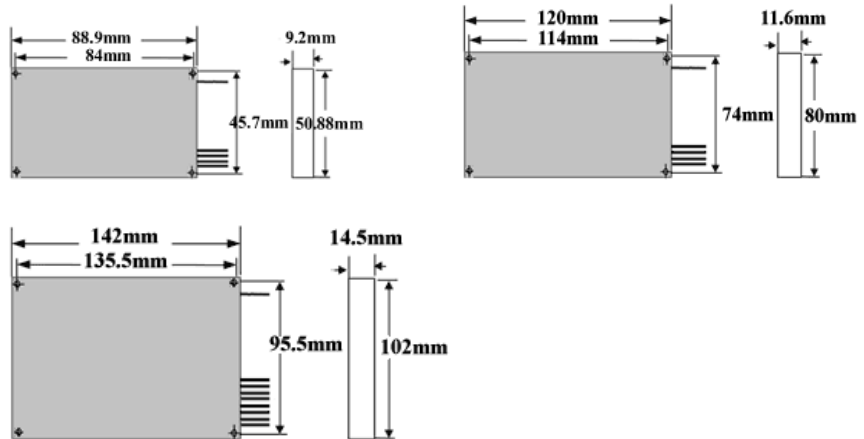

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

## Single-Window NxM Coupler/Splitter

### Ordering Information

	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Prefix	Type	Wavelength	Grade	Package	Coupling Ratio	Port	Fiber Type	Connector
<b>FC-</b>		1310 = 3 1550 = 5 Special = 0	Premium = 1 Special = 0	Special = 0	01/99 = 1 03/97 = 2 05/95 = 3 10/90 = 4 15/85 = 5 20/80 = 6 30/70 = 7 40/60 = 8 50/50 = 9 Special = 0	1x3 = 3 1x4 = 4 1x8 = 5 1x16 = 6 1x32 = 7 4x4 = 8 3x3 = 9 Special = 0	SMF-28 250um = 1 900um loose tube = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC = 7 Special = 0

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.