


Datasheet

HBPR-500M-10K-SI-FC

High-Speed Balanced Photoreceiver

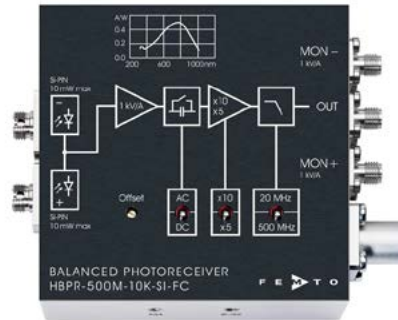


Features

- Bandwidth DC to 500 MHz
- Common-Mode Rejection Ratio (CMRR) 45 dB typ.
- Si-PIN photodiodes
- FC fiber optic inputs
- Spectral range 320 - 1000 nm
- Very low NEP, down to 12 pW/√Hz
- Transimpedance gain switchable  $5 \times 10^3$  V/A,  $10 \times 10^3$  V/A
- High dynamic input range up to  $2 \times 10$  mW balanced optical power
- Fast monitor outputs with 10 MHz bandwidth and  $1 \times 10^3$  V/A gain
- Switchable low pass filter for minimizing wideband noise
- UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread

Applications

- Spectroscopy
- Heterodyne detection
- Optical coherence tomography (OCT)
- Optical delay measurement
- Differential optical front-end for oscilloscopes, spectrum analyzers, A/D converters and RF lock-in amplifiers

Block Diagram

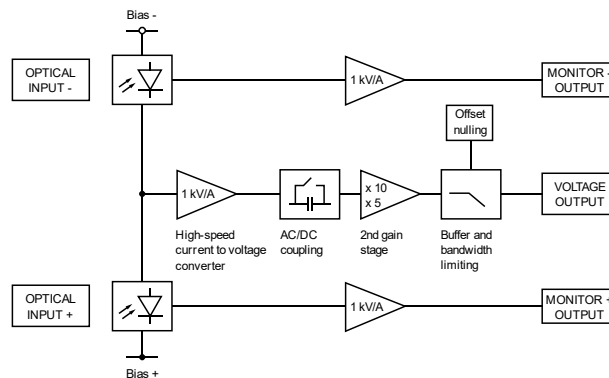




SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



HBPR-500M-10K-SI-FC\_R2/TH/08APR2021

06/22 / V3 / CHHW / femto/balanced-photoreceiver-series-hbpr/hbpr-500m-10k-si-fc

Datasheet		HBPR-500M-10K-SI-FC									
<b>High-Speed Balanced Photoreceiver</b>											
Available Input Version	HBPR-500M-10K-SI-FC 	fix/permanent FC fiber connector for high coupling efficiency, excellent conversion gain accuracy and common mode rejection ratio (CMRR).									
Related Models	Various free space or fiber coupled HBPR models, with bandwidth up to 500 MHz, in the spectral range from 320 nm to 1700 nm are available. Example: FST input 	1.035"-40 threaded flange for free space applications, compatible with many optical standard accessories.  See further information and separate datasheets on <a href="http://www.femto.de">www.femto.de</a>									
Available Accessory	PS-15 	power supply, input: 100 - 240 VAC, output: $\pm 15$ VDC, +400/-250 mA									
Specifications	<table border="0"> <tr> <td style="vertical-align: top;">Gain</td> <td style="vertical-align: top;">                             Test conditions                               Transimpedance gain                               Gain accuracy                              Conversion gain                               Common mode rejection ratio (CMRR)                         </td> <td style="vertical-align: top;"> <math>V_s = \pm 15</math> V, <math>T_a = 25</math> °C, signal output terminated with 50 <math>\Omega</math>, Monitor outputs terminated with 1 M<math>\Omega</math>                               5 x 10<sup>3</sup> V/A (2<sup>nd</sup> gain x5), 10 x 10<sup>3</sup> V/A (2<sup>nd</sup> gain x10) switchable (@ 50 <math>\Omega</math> load)   <math>\pm 1</math> % electrical                              2.55 x 10<sup>3</sup> V/W typ. (@ 2<sup>nd</sup> gain x5, 760 nm)                              5.1 x 10<sup>3</sup> V/W typ. (@ 2<sup>nd</sup> gain x10, 760 nm)                               50 dB typ. (f <math>\leq</math> 100 MHz)                              40 dB typ. (f <math>\leq</math> 500 MHz)                         </td> </tr> <tr> <td style="vertical-align: top;">Frequency Response</td> <td style="vertical-align: top;">                             Lower cut-off frequency                              Upper cut-off frequency                         </td> <td style="vertical-align: top;">                             DC / 10 Hz, switchable                              500 MHz (@ 2<sup>nd</sup> gain x5); 460 MHz (@ 2<sup>nd</sup> gain x10), switchable to 20 MHz                         </td> </tr> <tr> <td style="vertical-align: top;">Time Response</td> <td style="vertical-align: top;">                             Rise/fall time (10 % - 90 %)                         </td> <td style="vertical-align: top;">                             0.85 ns (@ 2<sup>nd</sup> gain x5); 0.95 ns (@ 2<sup>nd</sup> gain x10)                              17.5 ns (low pass filter 20 MHz)                         </td> </tr> </table>	Gain	Test conditions  Transimpedance gain  Gain accuracy Conversion gain  Common mode rejection ratio (CMRR)	$V_s = \pm 15$ V, $T_a = 25$ °C, signal output terminated with 50 $\Omega$ , Monitor outputs terminated with 1 M $\Omega$  5 x 10 <sup>3</sup> V/A (2 <sup>nd</sup> gain x5), 10 x 10 <sup>3</sup> V/A (2 <sup>nd</sup> gain x10) switchable (@ 50 $\Omega$ load)  $\pm 1$ % electrical 2.55 x 10 <sup>3</sup> V/W typ. (@ 2 <sup>nd</sup> gain x5, 760 nm) 5.1 x 10 <sup>3</sup> V/W typ. (@ 2 <sup>nd</sup> gain x10, 760 nm)  50 dB typ. (f $\leq$ 100 MHz) 40 dB typ. (f $\leq$ 500 MHz)	Frequency Response	Lower cut-off frequency Upper cut-off frequency	DC / 10 Hz, switchable 500 MHz (@ 2 <sup>nd</sup> gain x5); 460 MHz (@ 2 <sup>nd</sup> gain x10), switchable to 20 MHz	Time Response	Rise/fall time (10 % - 90 %)	0.85 ns (@ 2 <sup>nd</sup> gain x5); 0.95 ns (@ 2 <sup>nd</sup> gain x10) 17.5 ns (low pass filter 20 MHz)	
Gain	Test conditions  Transimpedance gain  Gain accuracy Conversion gain  Common mode rejection ratio (CMRR)	$V_s = \pm 15$ V, $T_a = 25$ °C, signal output terminated with 50 $\Omega$ , Monitor outputs terminated with 1 M $\Omega$  5 x 10 <sup>3</sup> V/A (2 <sup>nd</sup> gain x5), 10 x 10 <sup>3</sup> V/A (2 <sup>nd</sup> gain x10) switchable (@ 50 $\Omega$ load)  $\pm 1$ % electrical 2.55 x 10 <sup>3</sup> V/W typ. (@ 2 <sup>nd</sup> gain x5, 760 nm) 5.1 x 10 <sup>3</sup> V/W typ. (@ 2 <sup>nd</sup> gain x10, 760 nm)  50 dB typ. (f $\leq$ 100 MHz) 40 dB typ. (f $\leq$ 500 MHz)									
Frequency Response	Lower cut-off frequency Upper cut-off frequency	DC / 10 Hz, switchable 500 MHz (@ 2 <sup>nd</sup> gain x5); 460 MHz (@ 2 <sup>nd</sup> gain x10), switchable to 20 MHz									
Time Response	Rise/fall time (10 % - 90 %)	0.85 ns (@ 2 <sup>nd</sup> gain x5); 0.95 ns (@ 2 <sup>nd</sup> gain x10) 17.5 ns (low pass filter 20 MHz)									
<b>SOPHISTICATED TOOLS FOR SIGNAL RECOVERY</b>		<b>F E M T O</b>									

Datasheet

HBPR-500M-10K-SI-FC

High-Speed Balanced Photoreceiver

Specifications (continued)			
Input	Noise equivalent power (NEP)	minimum 12 pW/√Hz (@ 760 nm) 13 pW/√Hz (@ 760 nm, 20 MHz) 29 pW/√Hz (@ 760 nm, 200 MHz) 60 pW/√Hz (@ 760 nm, 500 MHz)	
	Maximum differential CW power for linear amplification	400 μW (@ 2 <sup>nd</sup> gain x5, DC-coupled, 760 nm) 200 μW (@ 2 <sup>nd</sup> gain x10, DC-coupled, 760 nm) 2.5 mW (@ AC-coupled, 760 nm)	
	Max. optical CW balanced power (common mode power)	10 mW (on each photodiode, @ 760 nm)	
	Monitor optical saturation power (limited by Maximum Rating)	12 mW (@ 760 nm)	
Detector	Detector	SI-PIN photodiode FC fiber connector	
	Active area	∅ 400 μm, integrated ball lens suitable for fibers up to 200 μm core diameter	
	Spectral range	320 - 1000 nm	
	Sensitivity	0.51 A/W typ. (@ 760 nm)	
Signal Output	Output voltage range	±1.0 V (@ 50 Ω load) for linear operation and low harmonic distortion	
	Max. output voltage	±2.0 V (@ 50 Ω load)	
	Offset voltage compensation	±100 mV typ., adjustable by offset potentiometer	
	Output impedance	50 Ω (terminate with 50 Ω load)	
	Slew rate	2800 V/μs	
	Max. output current	70 mA	
	Output return loss S22	-30 dB @ < 100 MHz -20 dB @ < 800 MHz	
	Output noise	2.3 mV <sub>RMS</sub> (15 mV <sub>PP</sub> ) (@ 2 <sup>nd</sup> gain x5) 3.9 mV <sub>RMS</sub> (26 mV <sub>PP</sub> ) (@ 2 <sup>nd</sup> gain x10) 0.25 mV <sub>RMS</sub> (1.7 mV <sub>PP</sub> ) typ. (@ 2 <sup>nd</sup> gain x5, BW: 20 MHz) 0.4 mV <sub>RMS</sub> (2.5 mV <sub>PP</sub> ) typ. (@ 2 <sup>nd</sup> gain x10, BW: 20 MHz) (@ 50 Ω load, no signal on detectors, measurement bandwidth 2 GHz)	
	Monitor Outputs	Monitor output gain	1 x 10 <sup>3</sup> V/A (@ ≥ 100 kΩ load)
		Monitor output voltage range	0 ... +10 V (@ ≥ 100 kΩ load)
Monitor output impedance		50 Ω (terminate with ≥ 100 kΩ load)	
Monitor output max. output current		30 mA typ.	
Monitor output bandwidth		DC ... 10 MHz	
Monitor output noise	0.6 mV <sub>RMS</sub> (4 mV <sub>PP</sub> ) (@ 100 kΩ load, no signal on detectors, measurement bandwidth 200 MHz)		
Power Supply	Supply voltage	±15 V (±14.5 V ... ±16.5 V)	
	Supply current	-90 / +120 mA (depends on operating conditions, recommended power supply capability min. ±200 mA)	

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY




**Datasheet**

**HBPR-500M-10K-SI-FC**

**High-Speed Balanced Photoreceiver**

Case	Weight	350 g (0.77 lbs)
	Material	AlMg3Mn, nickel-plated
Temperature Range	Storage temperature	-40 ... +85 °C
	Operating temperature	0 ... +60 °C
Absolute Maximum Ratings	Max. CW power (averaged)	12 mW (on each photodiode)
	Power supply voltage	±20 V
Connectors	Input	FC fiber optic connector (FC/PC and FC/APC compatible)
	Output	SMA jack (female)
	Power supply	Lemo® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)
Scope of Delivery	HBPR-500M-10K-SI-FC, Lemo® 3-pin connector, 3 x adapter SMA (male) to BNC (female), datasheet	
Ordering Information	HBPR-500M-10K-SI-FC	FC fiber optic connector (FC/PC and FC/APC compatible)

Spectral Responsivity

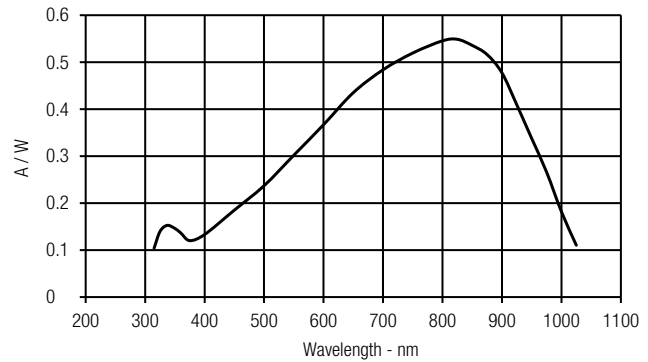

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY




Datasheet

HBPR-500M-10K-SI-FC

High-Speed Balanced Photoreceiver

Dimensions

Case dimensions for HBPR-500M-10K-SI-FC:

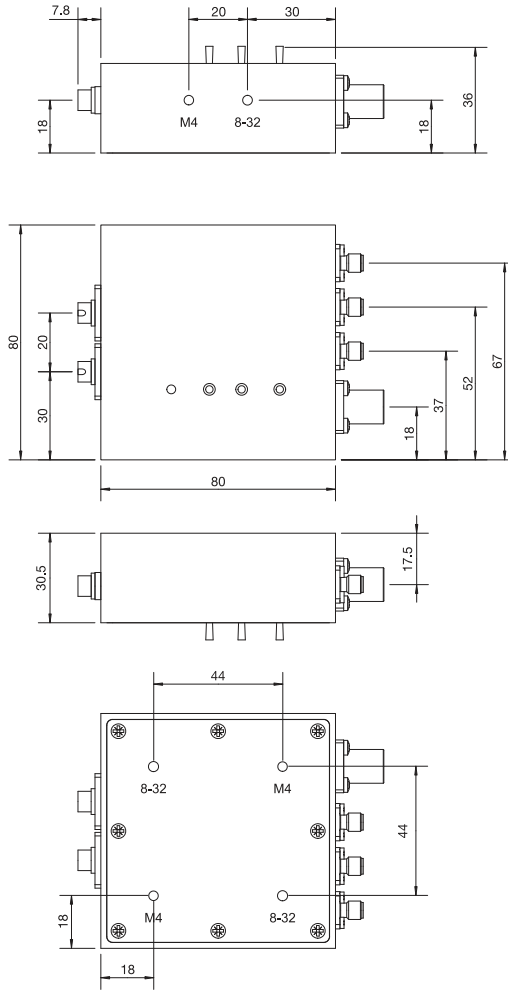

All measures in mm unless otherwise noted.

The bottom plate may be rotated to match the appropriate mounting thread to the optical axis by unscrewing the 8 screws.

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

