

## Features

- Up to 1.5 W CW output power.
- High Quality, Reliability, & Performance


## Applications

- Graphics
- Medical/Dental
- Industrial
- Defense

## Product Specifications

### 830 nm Multi-Mode Laser Diodes

### 50 $\mu\text{m}$ emitter (1 W-1.5 W)

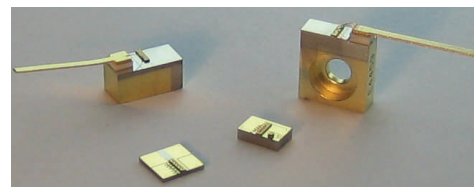

## Description:

High brightness, high quality, and high reliability are the foundation of our multi mode product line. Axcel's 830 nm multi mode laser diodes are available with up to 1.5 W of continuous output power from a 50  $\mu\text{m}$  single emitter chip. Axcel's trademark laser chip design creates un-measurable degradation and long lifetimes that make our chips among the most reliable in the industry today. Our 830 nm multi mode line serves a broad range of applications including solid state pumping, graphics, medical, dental, industrial, and defense.

Packaging options include industry standard C-mount, B-mount, and Q-mount. More product options are available upon request. Please view our website for mechanical drawings of all of our sub-mount, mount, and module packages.

*Contact us today and learn how Axcel Photonics can accelerate your research and production!*

## Standard Product Specifications for 830 nm Multi-mode Diodes

Parameter	Unit	1 W Series			1.5W Series		
		Min	Typ	Max	Min	Typ	Max
Wavelength	nm	825	830	835	825	830	835
Spectrum FWHM	nm	-	2	4	-	2	4
Operating Power ( $P_o$ )	W	-	1.0	-	-	1.5	-
Operating Current ( $I_o$ )	A	-	1.0	1.3	-	1.5	1.8
Operating Voltage ( $V_o$ )	V	-	1.9	2.2	-	1.9	2.2
Lifetime	hour	10,000	-	-	10,000	-	-
Vertical Far Field	deg, FWHM	-	32	38	-	32	38
Parallel Far Field	deg, FWHM	-	8	11	-	8	11
Threshold ( $I_{th}$ )	mA	-	200	350	-	200	350
Slope Efficiency (dP/dI)	W/A	1.0	1.2	-	1.0	1.2	-
Storage Temp.	$^{\circ}\text{C}$	-40	-	80	-40	-	80
Operating Temp. ( $T_{op}$ )	$^{\circ}\text{C}$	-20	25	50	-20	25	50
Lead Soldering Temp.(5 sec)	$^{\circ}\text{C}$	-	-	250	-	-	250

Note: 1) Specifications are subject to change without notice.

2) All Axcel Photonics products are TE polarized

**Determining Your Product number:**

MM—WWW—PPP—XYZ—(custom add-ons)  
(package)-(wavelength)-(power)-(options)

**Standard Product Configurations**

**1W Series**

CM-830-1000-030  
BM-830-1000-030  
QA-830-1000-030

**1.5W Series**

CM-830-1500-030  
BM-830-1500-030  
QA-830-1500-030

**Package:**

CM C-mount  
BM B-mount  
QA Q-mount

**X Option (aperture size)**

0 50 μm aperture

**Y Option (wavelength tolerance)**

3 ±3 nm

**Z Option (additional options)**

0 none

**Wavelength:**

830 830 nm

**Power Options:**

1000 1.0 W  
1500 1.5 W

Please note: These are our standard product configurations. Other options may be available, please inquire about any additional options that you may require when contacting our Sales Team.

**Safety**

Caution: Laser light emitted from any diode laser is invisible and may be harmful to the human eye. Avoid looking directly into the diode laser aperture when the device is in operation.

**Note:** The use of optical instruments with this product will increase eye hazard.

**ESD Caution**

Always handle diode lasers with extreme care to prevent electrostatic discharge, the primary cause of unexpected diode failure. You can prevent ESD by always wearing wrist straps, grounding all applicable work surfaces, and following extremely rigorous anti-static techniques when handling diode lasers.


**Operating Considerations**

Operating the diode laser outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with the component must be employed such that the maximum peak optical power cannot be exceeded. CW diode lasers may be damaged by excessive drive current or switching transients. When using power supplies, the diode laser should be connected with the main power on and the output voltage at zero. The current should be increased slowly while monitoring the diode laser output power and the drive current. Device degradation accelerates with increased temperature, and therefore careful attention to minimize the case temperature is advised. A proper heat-sink for the diode laser on a thermal radiator will greatly enhance laser life.

**Power Output Danger Label**



**WARNING! Invisible laser radiation is emitted from devices as shown below**

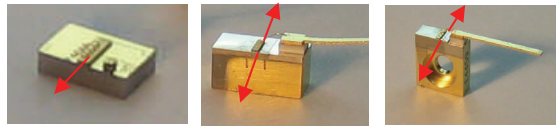

**21 CFR 1040.10 Compliance**

Because of the small size of these devices, each of the labels shown are attached to the individual shipping container. They are illustrated here to comply with 21 CFR 1040.10 as applicable under the Radiation Control for Health and Safety Act of 1968.