


<b>colorPol® VIS 700 BC4 CW02</b>	
Spectral range	VIS-NIR
Wavelength range with <b>contrast &gt; 10 000 : 1</b> <sup>(1)</sup>	600 to 850 nm
Transmittance (with antireflection coating)	> 84 % up to 93 %
Wavelength range with <b>contrast &gt; 1 000 : 1</b> <sup>(1)</sup>	600 to 1000 nm
Transmittance (with antireflection coating)	> 84 % up to 95 %
Filter size	up to 50x30 mm <sup>2</sup>
Filter thickness <sup>(2)</sup>	220 ± 25 µm
Acceptance angle	± 15°
Polarization axis	< 0.5° to indicated edge
Operating temperature	-50 to +400 °C

<sup>(1)</sup> contrast: ratio of parallel to perpendicular transmittance  
<sup>(2)</sup> other thicknesses on request

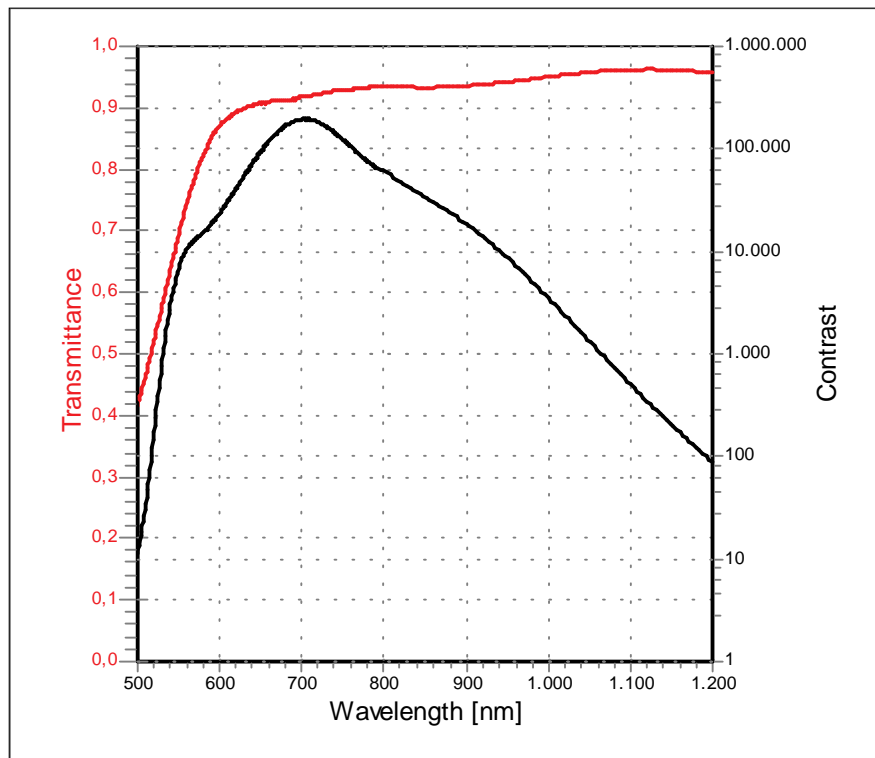

Version 1.4 – 01/18/2005