

Ox-FAC-xx Field Angled Cleaver

- Low back-reflection for reduced noise
- Highly repeatable cleave angle
- Staple action for easy use
- Angled cleaving for SM and PM fiber
- Fiber loaded in standard holder for angled mechanical splice


FEATURES:

- Staple action for easy use
- Rugged construction for field use
- 5 position blade for extended life
- Benchtop and handheld operation
- Easy fiber loading using customer supplied holder
- Compatible with angled mechanical splice




SPECIFICATIONS:

Fiber diameter	125 μ m SM or PM fiber
Cleave end angles	8° (+/-1°)
Blade Life	5000 estimated
Dimensions	57 mm x 29 mm x 80 mm
Weight	200 g
Minimum Cleave Length	8 mm minimum-set by fiber holder

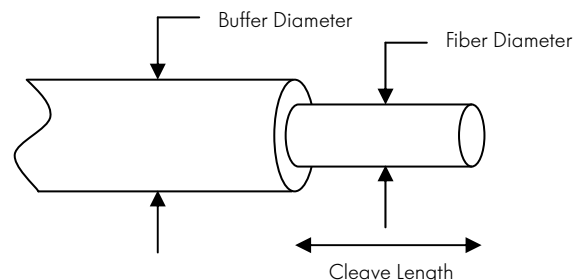

Full Description

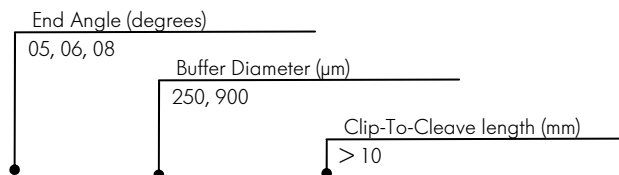

Ox-FAC-XX/125/XXX/X

This specification may be changed without notice due to technical avances.

Example

Ox-FAC-08/125/250/10

If you require a cleaver for any other fiber type, or a custom cleaver, please contact us.

