

850nm 50mW 5.6 φ TO-Type Laser Diode

• Features


1. Low operation current
2. Cost effective

• Applications

1. Bar-code scanner
2. Laser printer
3. Military

• Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P_O	CW	50	mW
Reverse voltage (LD)	V_{RL}	-	3.5	V
Reverse voltage (PD)	V_{RD}	-	30	V
Forward current (PD)	I_{FD}	-	10	mA
Case temperature	T_C	-	-10~+50	°C
Storage temperature	T_S	-	-40~+85	°C

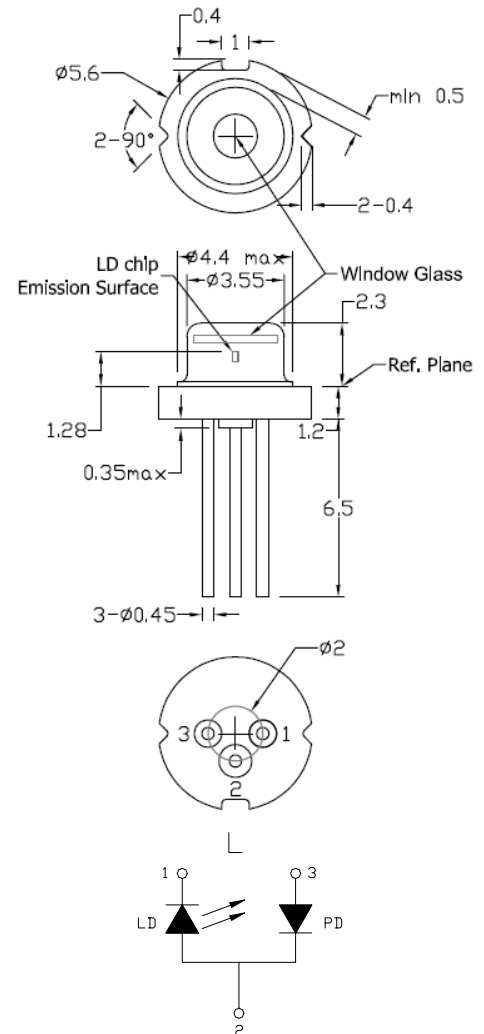

• Electrical and optical characteristics ($T_c=25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	830	845	850	nm	$P_o=50\text{mW}$
Threshold current	I_{th}	-	15	25	mA	
Operating current	I_{op}	-	75	95	mA	$P_o=50\text{mW}$
Operating voltage	V_{op}	-	1.8	2.4	V	$P_o=50\text{mW}$
Differential efficiency	η	0.7	0.8	1.0	mW/mA	$P_o=40\text{-}50\text{mW}$
Monitor current	I_m	0.2	0.5	1.0	mA	$P_o=50\text{mW}, V_{RD}=0\text{V}$
Parallel divergence angle	$\theta_{ }$	9	12	15	degree	$P_o=50\text{mW}$
Perpendicular divergence angle	θ_{\perp}	26	30	35	degree	
Parallel FFP deviation angle	$\Delta\theta_{ }$	-3	-	+3	deg	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-3	-	+3	deg	
Emission point accuracy	$\Delta x \Delta y$	-80	-	+80	um	
	ΔZ	-40	-	+40	um	

• Precautions







- * Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- * Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- * Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- * Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- * No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- * Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

* For reference only. Contents above are subject to change without notice.

AlGaAs Infrared Laser Diode

ADL-85502TL

6-2D-LD85-006_Rev.00

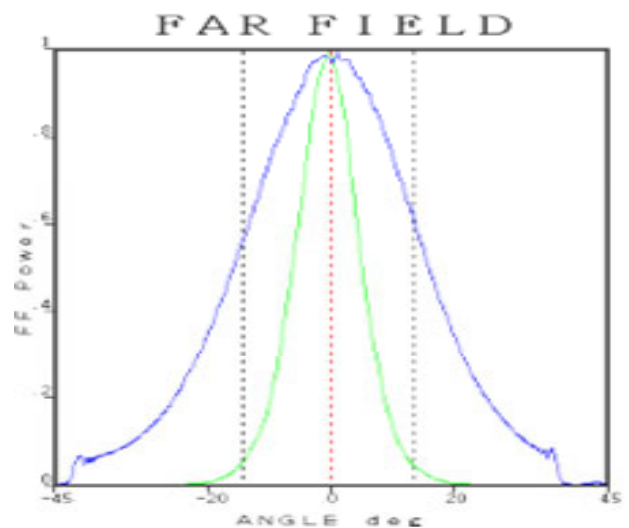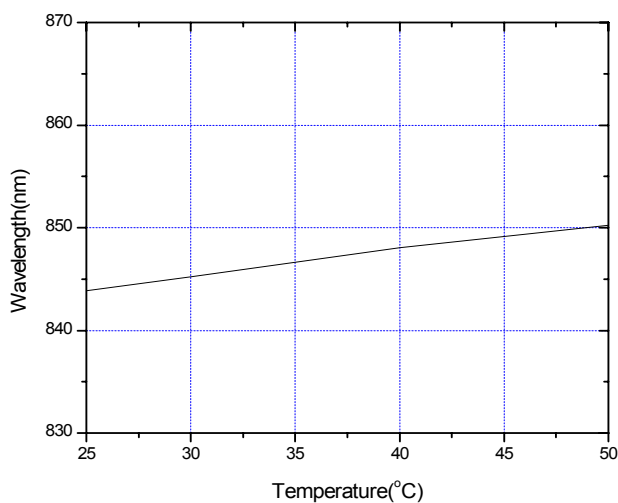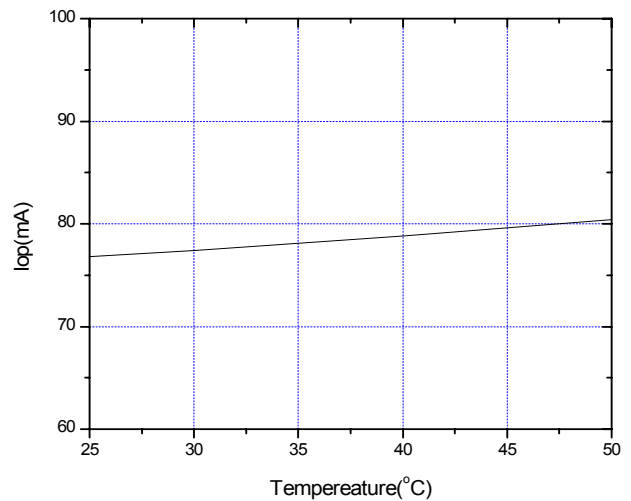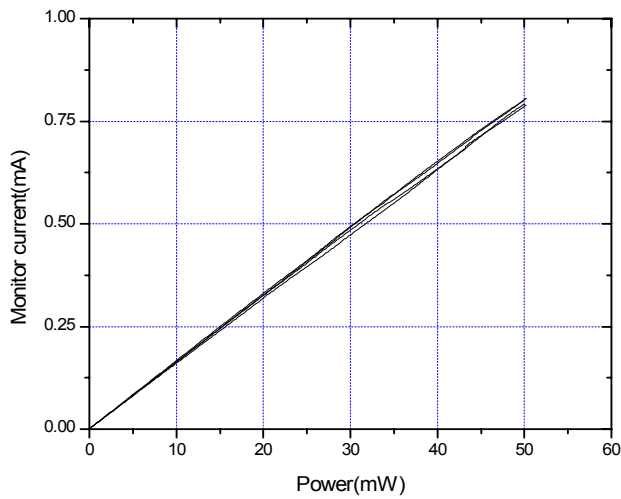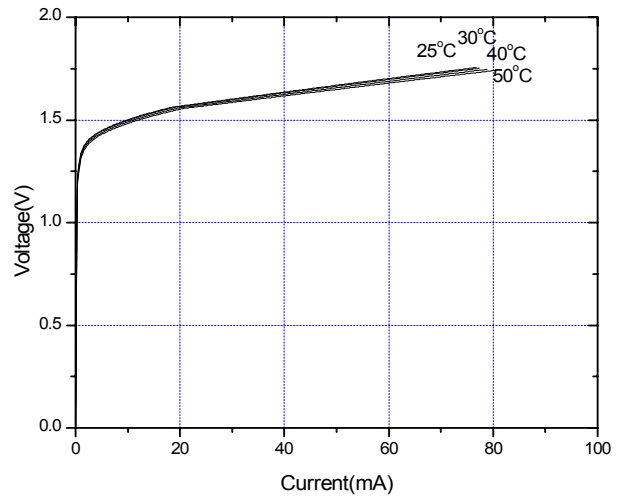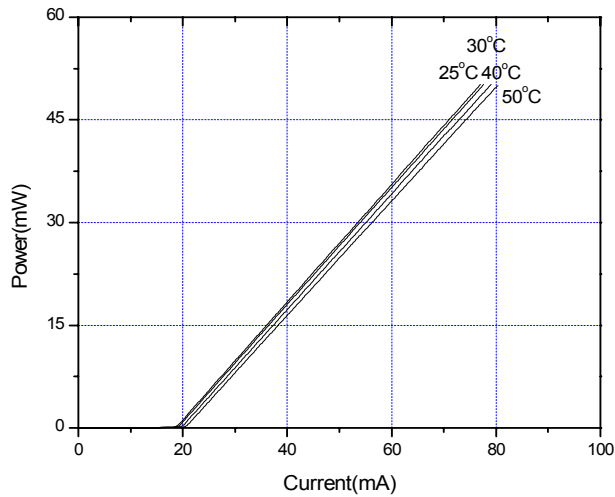

Arima
LASERS

* For reference only. Contents above are subject to change without notice.

www.lasercomponents.com

03/09 / V1 / HW / divers-vis/ari/850nm/ adl-85502tl.pdf

Germany and other countries: LASER COMPONENTS GmbH, Phone: +49 8142 2864 0, Fax: +49 8142 2864 11, info@lasercomponents.com
 USA: LASER COMPONENTS IG, Inc., Phone: +1 603 821 7040, Fax: +1 603 821 7041, info@laser-components.com
 Great Britain: LASER COMPONENTS (UK) Ltd., Phone: +44 1245 491 499, Fax: +44 1245 491 801, info@lasercomponents.co.uk
 France: LASER COMPONENTS S.A.S., Phone: +33 1 3959 5225, Fax: +33 1 3959 5350, info@lasercomponents.fr