

PbS Detectors Cooled Ultimate PB30-Series

Description

The PB30 series is a collection of TE cooled photoconductive single element PbS detectors that operate at -45 °C to -55 °C with a 20% cut-off of 3.4 μm . This series is widely used in analytic, safety and radiometric applications.

Features

- Spectral range from 1 to 3.4 μm
- State of the art performance
- 100% test data

Applications

- Pulp and paper industry
- Non-contact temperature measurement
- Spark detection
- Flame control
- Moisture monitoring
- FTNIR

Versions

- TO-can (TO-8, TO-8 with flange)
- Sapphire window as standard
- Custom versions available



Germany & Other Countries

Laser Components Germany GmbH
Tel: +49 8142 2864 - 0
Fax: +49 8142 2864 - 11
info@lasercomponents.com
www.lasercomponents.com

France

Laser Components S.A.S.
Tel: +33 1 39 59 52 25
Fax: +33 1 39 59 53 50
info@lasercomponents.fr
www.lasercomponents.fr

United Kingdom

Laser Components (UK) Ltd.
Tel: +44 1245 491 499
Fax: +44 1245 491 801
info@lasercomponents.co.uk
www.lasercomponents.co.uk

Nordic Countries

Laser Components Nordic AB
Tel: +46 31 703 71 73
Fax: +46 31 703 71 01
info@lasercomponents.se
www.lasercomponents.se

USA

Laser Components USA, Inc.
Tel: +1 603 821 - 7040
Fax: +1 603 821 - 7041
info@laser-components.com
www.laser-components.com

Basic Characteristics

Part Number	Element Size [mm]	Aperture Size [mm]	Features	20% Cut-off Wavelength [μm] ^b	Peak Wavelength [μm] ^b	Peak Responsivity [V/W] ^{a,c}		Time Constant [μs] ^b	
				Typ.	Typ.	Min.	Typ.	Typ.	Max.
PB30S1010T2S6L	1.0 x 1.0	dia. 9.5	2 stage cooling (max 3.0 W), TO-8 flange, large cap	3.4	2.7	1500000	2200000	1750	3500
PB30S2020T2S6L	2.0 x 2.0	dia. 9.5		3.4	2.7	750000	1100000	1750	3500
PB30S3030T2S6L	3.0 x 3.0	dia. 9.5		3.4	2.7	500000	730000	1750	3500
PB30S6060T2S6L	6.0 x 6.0	dia. 9.5		3.3	2.6	240000	3600000	1750	3500

Further Versions in progress

Notes:

^a Measured with 500 K blackbody. Bias is 50 V/mm with 1 MOhm load in series.

Chopping frequency is 650 Hz.

^b Parameter not 100% tested.

^c Without filter/window

Cooling Characteristics

Part Number	Element Size [mm]	Typ. Detector Operating Temperature [°C] ^c	Max. Cooler Power	Delta T @ max. Cool [°C] ^a		Optional Package Versions
			Typ.	Min.	Typ.	
PB30S1010T2S6L	1.0 x 1.0	-50	2.2 V @ 1.4 A	70	75	TO-8
PB30S2020T2S6L	2.0 x 2.0	-50	2.2 V @ 1.4 A	70	75	TO-8
PB30S3030T2S6L	3.0 x 3.0	-45	2.2 V @ 1.4 A	65	65	TO-8
PB30S6060T2S6L	6.0 x 6.0	-40	2.2 V @ 1.4 A	60	65	TO-8

^a Values are valid for TO-66 and TO-8 packages.

^c Valid with sufficient heat sinking only!

Electro-Optical Characteristics

Part Number	Element Size [mm]	Noise Density (rms) [$\mu\text{V}/\text{Hz}^{1/2}$] ^a		Peak D* [$\text{cm Hz}^{1/2}/\text{W}$] ^{a,b,c}		Peak D* [$\text{cm Hz}^{1/2}/\text{W}$] ^{a,c}		Dark Resistance [MOhm/square]		
		@ 90 Hz ^b	@ 650 Hz	@ 90 Hz	@ 90 Hz	@ 650 Hz	@ 650 Hz	Min.	Typ.	Max.
		Typ.	Typ.	Min.	Typ.	Min.	Typ.			
PB30S1010T2S6L	1.0 x 1.0	TBD		7.0 E+10	1.6 E+11	2.2 E+11	3.2 E+11	3.0	6.0	20
PB30S2020T2S6L	2.0 x 2.0			7.0 E+10	1.6 E+11	2.2 E+11	3.2 E+11	3.0	6.0	20
PB30S3030T2S6L	3.0 x 3.0			7.0 E+10	1.6 E+11	2.2 E+11	3.2 E+11	3.0	6.0	20
PB30S6060T2S6L	6.0 x 6.0			3.5 E+10	8.0 E+10	1.0 E+11	2.5 E+11	3.0	6.0	20

Notes:

^a Measured with 500 K blackbody. Bias is 50 V/mm with 1 MOhm load in series.

Bandwidth of test setup is 1 Hz.

^b Parameter not 100% tested.

^c Without filter/window

All specifications apply at or near max. cooling temp. with heat sink at +25 °C.


Absolute Maximum Ratings

	Min	Max	Units
Storage temperature	- 70	+ 80	°C
Operating temperature	- 65	+ 75	°C
Soldering temperature (for 5 sec)		+ 250 (at pins only)	°C
ESD damage threshold (Human Body Model Class 3B ^a)	8000		V
TE-cooler voltage ^b	-	2.2	V
TE-cooler current ^b	-	1.4	A

^a ANSI/ESD STN5. 1-2007

^b Valid with sufficient heat sinking only!

Part Number Designations

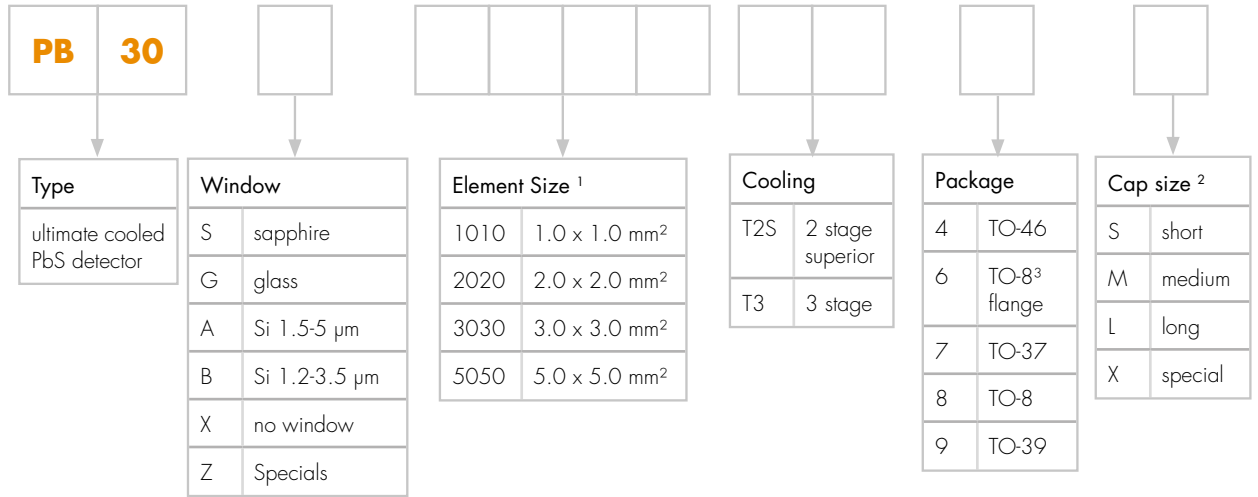

¹ for rectangular elements: space between electrodes first

² see separate list for details

³ TO-8 with copper flange (equal TO-66)

Package Drawings

All standard packages, dimensions and tolerances are shown in our supplementary datasheet „PbS- / PbSe Detectors - Package Drawings & Cooling Specifications“.

Product Changes

LASER COMPONENTS reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application.

Ordering Information

Products can be ordered directly from LASER COMPONENTS or its representatives. For a complete listing of representatives, visit our website at www.lasercomponents.com