


# PRONTO-SI

0.3 nW - 800 mW power probe with touchscreen controls

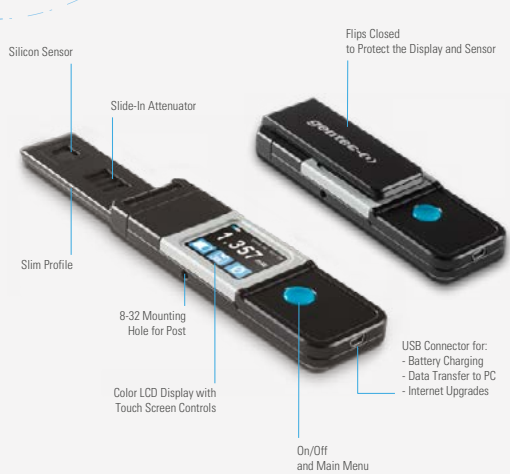


## KEY FEATURES

- > **POCKET-SIZE**  
This low power laser probe is so compact it fits in your pocket!
- > **SLIM PROFILE**  
The sensor part is only 6 mm thick, allowing it to fit into tight spaces
- > **EASY TO USE**  
The color LCD touchscreen allows for a friendly user interface. You can make a measurement with just the touch of a button!
- > **VERY LOW POWER MEASUREMENTS**  
Thanks to its very low noise level of only 10 pW, the PRONTO-Si measures powers as low as 0.3 nW
- > **SLIDE-IN ATTENUATOR**  
Just slide the OD1 integrated filter to the ON position and you can measure up to 800 mW of continuous power at 532 nm (maximum power varies with wavelength)
- > **DATA LOGGING**  
Save your data to the internal memory and then transfer them to your PC over the USB connection
- > **OPTIONAL FIBER OPTICS ADAPTOR**  
The fiber optics adaptor is held securely in place with a set screw and is compatible with OD attenuators
- > **SERIAL COMMANDS**  
Serial commands are available to let you take full control of your PRONTO from your PC.

## USER INTERFACE


### 3 Displays for the Measurements

#### Real-Time Display



Displays the measured value with large digits so you can see them from a distance

#### Bargraph Display



Adds a bargraph below the measured value, for an intuitive understanding of the trend of your laser

#### Min/Max Display




In addition to the Real Time value, the device displays the lowest and highest values


#### Save your Data and Transfer it to your PC



#### Adjust the Wavelength



#### Set the Brightness and Orientation



## SLIDE-IN ATTENUATOR



ON - 800 mW



OFF - 80 mW

## DATA TRANSFER TO PC




# PRONTO-SI

## Specifications

CE NIST\*  
Traceable

 VDE  
\*Also traceable to NRC-CNRC



PRONTO-SI	
<b>MAX AVERAGE POWER*</b> (ATTENUATOR OFF / ATTENUATOR ON)	88 mW / 800 mW
<b>EFFECTIVE APERTURE</b>	10 x 10 mm
<b>INTERFACE</b>	Touchscreen color LCD display
<b>MEASUREMENT CAPABILITY</b>	
Calibrated spectral range	
Attenuator OFF	320 - 1100 nm
Attenuator ON	400 - 1100 nm
Power range*	
Attenuator OFF	0.3 nW - 88 mW at 532 nm
Attenuator ON	3 nW - 800 mW at 532 nm
Noise equivalent power	10 pW at 980 nm
Response time	0.2 s
Measurement accuracy	From $\pm 1.5\%$ to $\pm 7.5\%$ (wavelength-dependent)
Display resolution	1 pW
<b>DAMAGE THRESHOLDS</b>	
Maximum average power density	100 W/cm <sup>2</sup>
Maximum average power	800 mW (with attenuator ON)
<b>USER INTERFACE</b>	
Displays	Real-time, bar graph and min/max
Measurement controls	Zero offset, wavelength selection and reset data
Data acquisition and transfer	Yes
<b>GENERAL SPECIFICATIONS</b>	
Display type	Touchscreen Color LCD
Display size	28.0 x 35.0 mm (128 x 160 pixels)
Data storage	50 000 pts
Battery type	Rechargeable Li-ion
Battery life	17 hours (with brightness set at 25%)
Battery recharge via	USB port
<b>PHYSICAL CHARACTERISTICS</b>	
Effective aperture	10 x 10 mm
Sensor	Silicon
Attenuator	Integrated slide-in ODI attenuator
Mounting hole (for post)	1 x 8-32
Dimensions (Open)	41.0W x 212.0L x 15.0D mm (Sensor part is only 6.0D mm)
Dimensions (Closed)	41.0W x 134.0L x 21.5D mm
Weight	150 g
<b>ORDERING INFORMATION</b>	
Compatible stand	STAND-S-233
Product page	

\* See curves (page 65) for maximum power at other wavelengths

Specifications are subject to change without notice