


Data Sheet

HL40033G


405nm / 1,000mW Violet Laser Diode

Outline

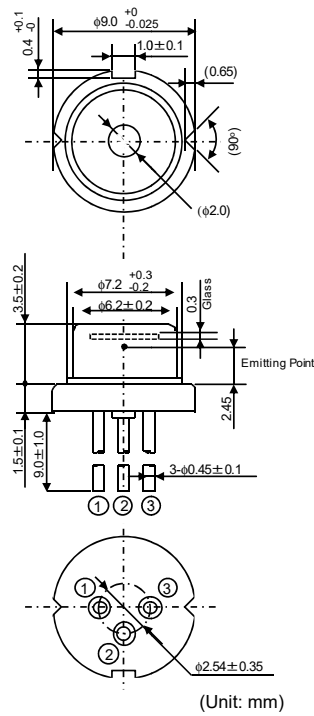

Internal Circuit

HL40033G



Features

- Optical output power: 1,000mW (CW)
- Violet Lasing: 405nm Typ.
- Low operating current: 1,000mA Typ.
- Low operating voltage: 5.0V Max.
- Package: $\phi 9.0$ mm
- Multiple transverse mode
- TE mode oscillation

Application

- Direct imaging for PCB
- Industry
- Display
- Bio & Medical

Absolute Maximum Ratings (Tc=25°C)







Item	Symbol	Ratings	Unit
Optical output power	Po	1,100	mW
LD Reverse Voltage	V _{R(LD)}	2	V
Operating Temperature	Topr	0 ~ +30	°C
Storage Temperature	Tstg	-40 ~ +85	°C

Optical and Electrical Characteristics (Tc=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Threshold current	I _{th}	250	320	400	mA	-
Operating current	I _{op}	-	1,000	1,300	mA	Po=1,000mW
Operating voltage	V _{op}	-	-	5.0	V	Po=1,000mW
Beam divergence Parallel to the junction	θ _{//}	5	13	25	°	Po=1,000mW, Full angle 1/e ²
Beam divergence Perpendicular to the junction	θ _⊥	30	42	50	°	Po=1,000mW, Full angle 1/e ²
Lasing Wavelength	λ _p	400	405	410	nm	Po=1,000mW

Data Sheet HL40033G Rev2. Jul. 01. 2015

Typical Characteristic Curves

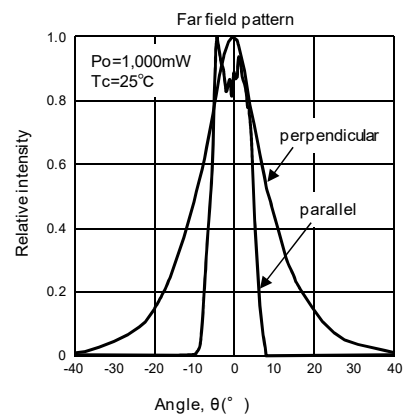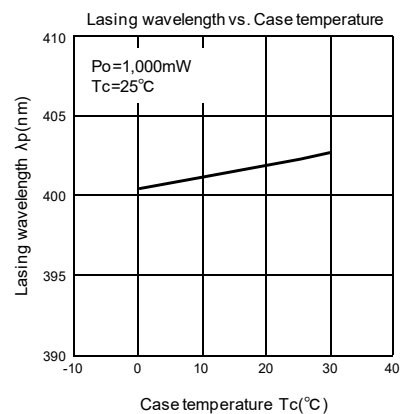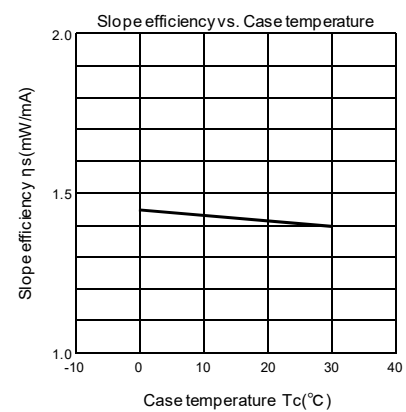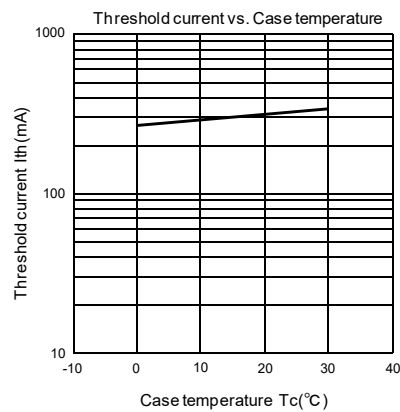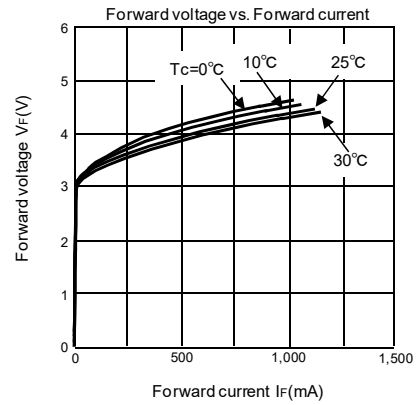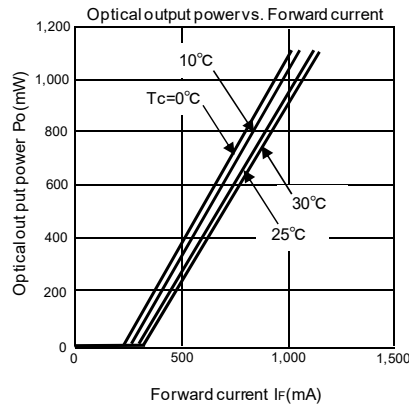

Data Sheet HL40033G Rev2. Jul. 01. 2015

1. The laser light is harmful to human body especially to eye no matter what directly or indirectly. The laser beam shall be observed or adjusted through infrared camera or equivalent.
2. This product (without violet laser diode) contains gallium arsenide (GaAs), which may seriously endanger your health even at very low doses. Please avoid treatment which may create GaAs powder or gas, such as disassembly or performing chemical experiments, when you handle the product. When disposing of the product, please follow the laws of your country and separate it from other waste such as industrial waste and household garbage.



Caution - use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Data Sheet HL40033G Rev2. Jul. 01. 2015