


### MX-LN-05-PD-P-P-FA-FA

All specifications given at 25°C, 1550 nm, unless differently specified. From SP-0217-PR-01.

ELECTRICAL				
		Min	Typ	Max
Modulation bandwidth	GHz	3	4	-
Electrical return loss S <sub>11</sub> 0 – 5 GHz	dB	-	-13	-10
V <sub>π</sub> RF electrodes @ 50kHz	V	-	3.5	4
V <sub>π</sub> DC electrodes	V	-	6.5	7
Ripple S <sub>21</sub>	dB	-	0.5	1
RF port impedance matching	Ω	-	50	
DC port impedance matching	MΩ	1	-	-
OPTICAL				
Crystal	Lithium Niobate X-Cut Y-Prop			
Waveguide process	Titanium in-diffusion			
Operating wavelength	nm	1530	1550	1580
Insertion loss (without connector)	dB	-	3.5	4.5
DC Extinction ratio (measured with narrow source, linewidth ≤ 200 MHz)	dB	20	25	-
Optical return loss	dB	-40	-45	-
Chirp	-	-0.1	-	+0.1
INTERFACES				
Input fiber	Polarization maintaining 1550 nm Corning PM 15-U25D length: 1.5 meter, buffer diameter: 900 μm			
Output fiber	Polarization maintaining 1550 nm Corning PM 15-U25D length: 1.5 meter, buffer diameter: 900 μm			
Package size	85 x 15 x 9.65 mm <sup>3</sup>			
Input RF connector	Female K			
DC electrodes and PD* connectors	Pins			
Input optical connector	FC/APC			
Input optical connector orientation	Slow axis parallel to connector key			
ENVIRONMENTAL				
Operating temperature	0°C to +70°C			
Storage temperature	-40°C to +85°C			
MAXIMUM RATINGS				
Maximum RF input power (CW mode)	28dBm			
Bias voltage range	V	-20	-	20
Maximum optical input power (CW mode)	+20 dBm			

Société par Actions Simplifiée au capital de 11 366 319 €  
R.C.S. Versailles 433 185 121 - SIRET 433 185 121 00137  
Code APE 2651B - N° TVA Intra. FR 09 433 185 121

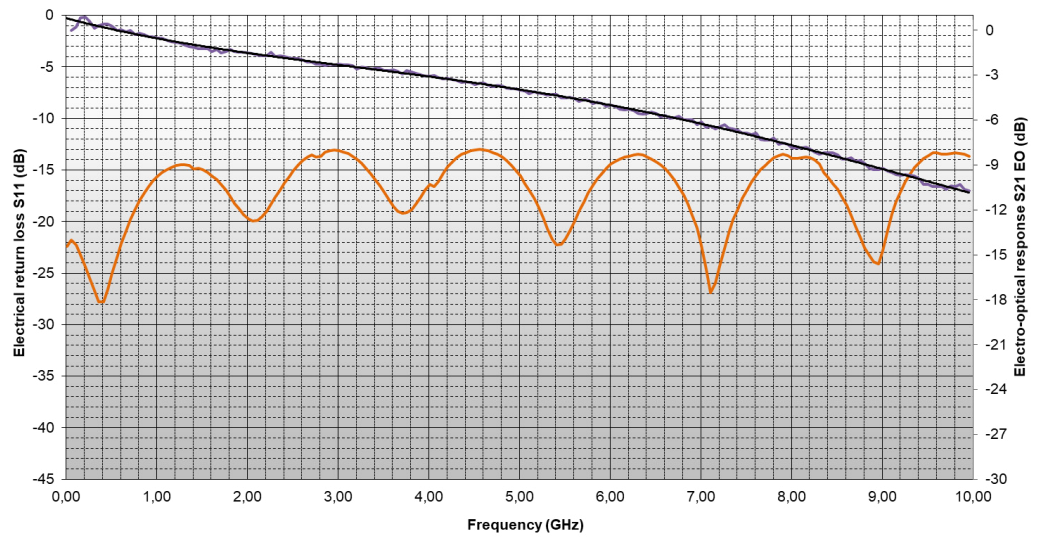

MX-LN-05 [S] parameters

MX-LN-05\_PRELIMINARY / SP-0217-PR-01

Société par Actions Simplifiée au capital de 11 366 319 €  
R.C.S. Versailles 433 185 121 - SIRET 433 185 121 00137  
Code APE 2651B - N° TVA Intra. FR 09 433 185 121