

MODULATOR

MX1300-LN series

O-Band Intensity Modulators

The MX1300-LN series are lithium niobate (LiNbO₃) intensity modulators specially designed for operation in the 1310 nm wavelength band. Thanks to their O-Band optimized optical waveguides and their 1310 nm selected fibers, the MX1300-LN can be claimed genuine 1310 nm intensity modulators.

The X-cut design of these Mach-Zehnder modulator confers them an unmatched stability in a wide range of operational conditions, as well as a zero chirp performance. iXblue proprietary waveguide design offers a low insertion loss combined with a high contrast. Thanks to their low V_p, the MX1300 series are ideally suited for low to high bit rates optical transmission with NRZ, RZ, DPSK, PAM-4 and are key devices for a large variety of applications.

**Features**

- O-Band specific waveguides and fibers
- X-cut for high stability
- Low drive voltage
- Low insertion loss

Applications

- Up to NRZ-56 Gb/s - PAM4-32 Gbaud
- General purpose intensity modulation
- Test and measurements

Options

- Analog version
- 1060 nm, 850 nm band versions

Related Equipments

- Choice of RF drivers
- MBC-DG Automatic Bias Controllers
- ModBox-VNA-Oband
- ModBox-PON

MX1300-LN-10 Performance Highlights

Parameter	Min	Typ	Max	Unit
Operating wavelength	1270	-	1330	nm
Insertion loss	-	3.5	-	dB
Electro-optical bandwidth	-	12	-	GHz
V _r RF @50 kHz	-	4	-	V
Electro-optical bandwidth	10	-	-	GHz

MX1300-LN-20 Performance Highlights

Parameter	Min	Typ	Max	Unit
Operating wavelength	1270	-	1330	nm
Insertion loss	-	3.5	-	dB
Electro-optical bandwidth	-	25	-	GHz
V _r RF @50 kHz	-	4	-	V
Electro-optical bandwidth	10	-	-	GHz

MX1300-LN-40 Performance Highlights

Parameter	Min	Typ	Max	Unit
Operating wavelength	1270	-	1330	nm
Insertion loss	-	3.5	-	dB
Electro-optical bandwidth	-	30	-	GHz
V _r RF @50 kHz	-	4	-	V
Electro-optical bandwidth	10	-	-	GHz

MODULATOR | MX1300-LN SERIES | 2/6

MX1300-LN-10

12 GHz Intensity Modulator

Electrical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Electro-optical bandwidth	S ₂₁	RF electrodes, -3 dB from 2 GHz	10	12	-	GHz
Ripple S ₂₁	ΔS ₂₁	RF electrodes	-	0.5	1	dB
Electrical return loss	S ₁₁	RF electrodes, f < 10 GHz	-	-15	-10	dB
Vπ RF @50 kHz	Vπ _{RF 50 kHz}	RF electrodes	-	4	5	V
Vπ RF @10 Gb/s PRBS	Vπ _{RF 10 Gb/s}	RF electrodes	-	4.7	5.7	V
Vπ DC electrodes	Vπ _{DC}	DC electrodes	-	5.5	6	V
RF input impedance	Z _{in-RF}	-	-	50	-	Ω
DC input impedance	Z _{in-DC}	-	1	-	-	MΩ

50 Ω RF input

Optical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Crystal	-	-				Lithium Niobate X-Cut Y-Prop
Operating wavelength	λ	-	1270	1310	1330	nm
Insertion loss	IL	Without optical connectors*	-	3.5	4.5	dB
DC Extinction ratio	ER	Measured with narrow source linewidth < 200 MHz	20	22	-	dB
Optical return loss	ORL	-	-40	-45	-	dB
Chirp	α	-	-0.1	0	+0.1	-

All specifications given at 25 °C, 1310 nm, unless differently specified.

* Consider an extra-loss up to 0.25 dB for each FC/APC optical connector

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
RF input power	EP _{in}	-	+28	dBm
Bias Voltage	V _{bias}	-20	+20	V
Optical input power	OP _{in}	-	+20	dBm
Operating temperature	OT	0	+70	°C
Storage temperature	ST	-40	+85	°C

MODULATOR | MX1300-LN SERIES | 3/6

MX1300-LN-20

25 GHz Intensity Modulator

Electrical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Electro-optical bandwidth	S_{21}	RF electrodes, -3 dB from 2 GHz	20	25	-	GHz
Ripple S_{21}	ΔS_{21}	RF electrodes	-	0.5	1	dB
Electrical return loss	S_{11}	RF electrodes, $f < 20$ GHz	-	-15	-10	dB
V _π RF @50 kHz	$V_{\pi_{RF \text{ 50 kHz}}}$	RF electrodes	-	4	5	V
V _π RF @10 Gb/s PRBS	$V_{\pi_{RF \text{ 10 Gb/s}}}$	RF electrodes	-	5.5	6	V
V _π DC electrodes	$V_{\pi_{DC}}$	DC electrodes	-	5.5	6	V
RF input impedance	Z_{in-RF}	-	-	50	-	Ω
DC input impedance	Z_{in-DC}	-	1	-	-	$M\Omega$

50 Ω RF input**Optical Characteristics**

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Crystal	-	-			Lithium Niobate X-Cut Y-Prop	
Operating wavelength	λ	-	1270	1310	1330	nm
Insertion loss	IL	Without optical connectors*	-	3.5	4.5	dB
DC Extinction ratio	ER	Measured with narrow source linewidth < 200 MHz	20	22	-	dB
Optical return loss	ORL	-	-40	-45	-	dB
Chirp	α	-	-0.1	0	+0.1	-

All specifications given at 25 °C, 1310 nm, unless differently specified.

* Consider an extra-loss up to 0.25 dB for each FC/APC optical connector

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
RF input power	EP_{in}	-	+28	dBm
Bias Voltage	V_{bias}	-20	+20	V
Optical input power	OP_{in}	-	+20	dBm
Operating temperature	OT	0	+70	°C
Storage temperature	ST	-40	+85	°C

MODULATOR | MX1300-LN SERIES | 4/6

MX1300-LN-40

40 GHz Intensity Modulator

Electrical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Electro-optical bandwidth	S ₂₁	RF electrodes, -3 dB from 2 GHz	28	30	-	GHz
Ripple S ₂₁	ΔS ₂₁	RF electrodes	-	0.5	1	dB
Electrical return loss	S ₁₁	RF electrodes, f < 20 GHz	-	-15	-10	dB
V _π RF @50 kHz	V _π _{RF 50 kHz}	RF electrodes	-	4	5	V
V _π DC electrodes	V _π _{DC}	DC electrodes	-	5.5	6	V
RF input impedance	Z _{in-RF}	-	-	50	-	Ω
DC input impedance	Z _{in-DC}	-	1	-	-	MΩ

50 Ω RF input

Optical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Crystal	-	-				Lithium Niobate X-Cut Y-Prop
Operating wavelength	λ	-	1270	1310	1330	nm
Insertion loss	IL	Without optical connectors*	-	3.5	4.5	dB
DC Extinction ratio	ER	Measured with narrow source linewidth < 200 MHz	20	22	-	dB
Optical return loss	ORL	-	-40	-45	-	dB
Chirp	α	-	-0.1	0	+0.1	-

All specifications given at 25 °C, 1310 nm, unless differently specified.

* Consider an extra-loss up to 0.25 dB for each FC/APC optical connector


Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.


Parameter	Symbol	Min	Max	Unit
RF input power	E _P _{in}	-	+28	dBm
Bias Voltage	V _{bias}	-20	+20	V
Optical input power	O _P _{in}	-	+20	dBm
Operating temperature	OT	0	+70	°C
Storage temperature	ST	-40	+85	°C

MODULATOR | MX1300-LN SERIES | 5/6
MX1300-LN-10, 20 & 40


MX1300-LN-10 Typical S_{21} Curve

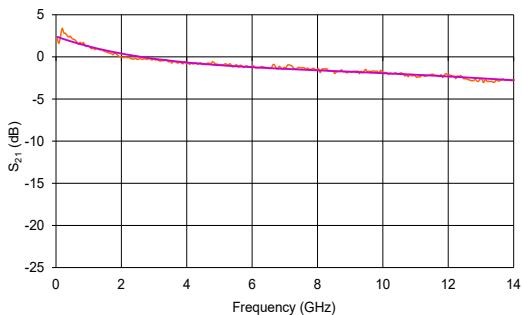


MX1300-LN-10 Typical S_{11} Curve

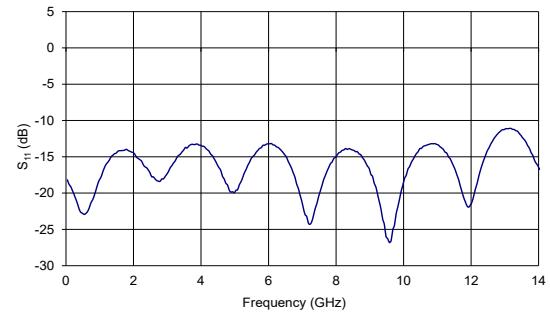


MX1300-LN-20 Typical S_{21} Curve

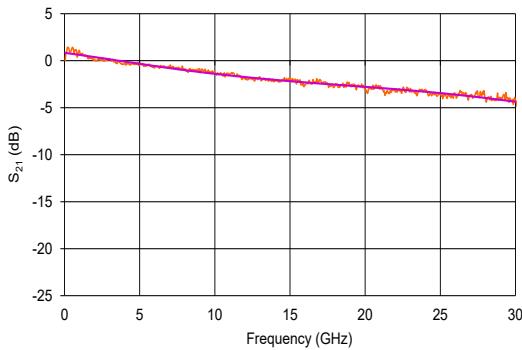


MX1300-LN-20 Typical S_{11} Curve

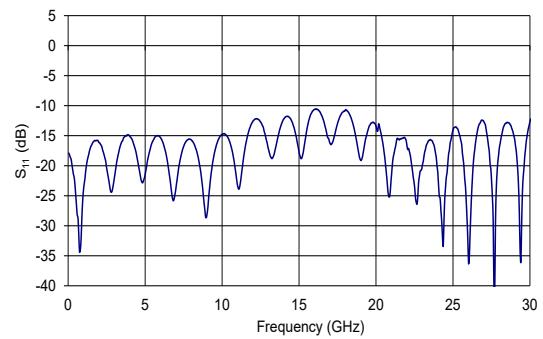

MX1300-LN-40 Typical S_{21} Curve

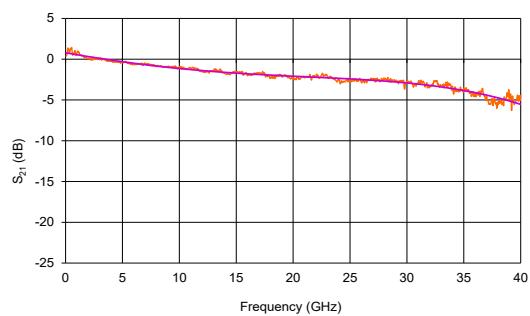

MX1300-LN-40 Typical S_{11} Curve

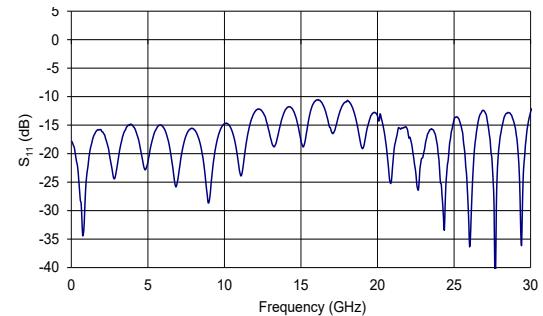


exail

MODULATOR | MX1300-LN SERIES | 6/6

Mechanical Diagram and Pinout

All measurements in mm

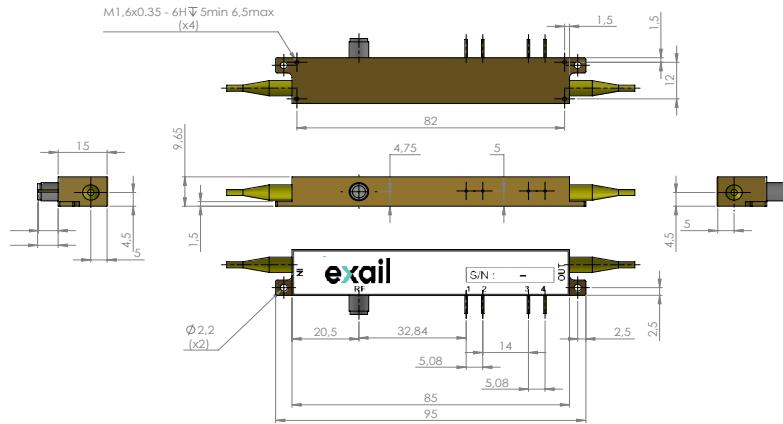

Port	Function	Note
IN	Optical input port	Polarization maintaining 1310 nm Corning PM 13-U25D Length: 1.5 meter, buffer diameter: 900 µm
OUT	Optical output port	Polarization maintaining 1310 nm Corning PM 13-U25D Length: 1.5 meter, buffer diameter: 900 µm
RF	RF input port	MX1300-LN-10: Female K (SMA compatible) MX1300-LN-20: Female K or 2.4 mm (optional) MX1300-LN-40: 2.4 mm, female, compatible to mate with V / 1.85 mm connectors (K option)
1	Ground	Pin feed through diameter 1.0 mm
2	DC	Pin feed through diameter 1.0 mm
3, 4	Photodiode cathode, anode	Pin feed through diameter 1.0 mm

Ordering information

MX1300-LN - □ - □ - □ - □ - □ - □

- Bandwidth : **10** (10 GHz), **20** (20 GHz), **40** (40 GHz)
- Internal photodiode: "PD": integrated, "00": not integrated (by default)
- Input fiber: P Polarization maintaining
- Output fiber: P Polarization maintaining, S Standard single mode
- Input connector: **00** (bare fiber), **FA** (FC/APC)
- Output connector: **00** (bare fiber), **FA** (FC/APC)

About us

Exail Photonics produces specialty optical fibers and Bragg gratings based fiber optics components and provides optical modulation solutions based on the company lithium niobate (LiNbO_3) modulators and RF electronic modules. Exail Photonics serves a wide range of industries: sensing and instruments, defense, telecommunications, space and fiber lasers as well as research laboratories all over the world.

Exail reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein. All statements, specification, technical information related to the products herein are given in good faith and based upon information believed to be reliable and accurate at the moment of printing. However, Exail provides no warranty (whether express or implied or statutory) as to the description, sufficiency, accuracy or completeness, merchantability or fitness for a particular purpose of any information or specification detailed herein. No liability is assumed for any inaccuracies and/or as a result of use of the products. The user must validate all parameters for each application before any use and he shall assume all risks and responsibilities in connection with the use of the products.

