

PRONTO

0.5 W - 250 W power probes with touchscreen controls




KEY FEATURES

- **POCKET-SIZE**
This mid to high power laser probe is so compact it fits in your pocket!
- **EASY TO USE**
The color LCD touchscreen allows for a friendly user interface. You can make a measurement with just the touch of a button!
- **DATA LOGGING**
Save your data to the internal memory and then transfer them to your PC over the USB connection.
- **FROM LOW TO HIGH POWERS**
Thanks to a low noise level and high damage threshold, the PRONTO can measure powers from 0.5 W to 250 W.
- **YAG AND CO₂ CALIBRATIONS**
The PRONTO-250 comes fully calibrated: every wavelength between 248 nm and 2.5 μm (YAG), and a real calibration at 10.6 μm (CO₂).

The PRONTO-250-PLUS has an additional calibration for Single-Shot Energy measurements.

- **HANDS-FREE OPERATION**
Place it on a flat surface or use one of the 2 threaded holes for safe use with optical stands.
- **SERIAL COMMANDS**
Serial commands are available to let you take full control of your PRONTO from your PC.

USER INTERFACES (SSP MODE)

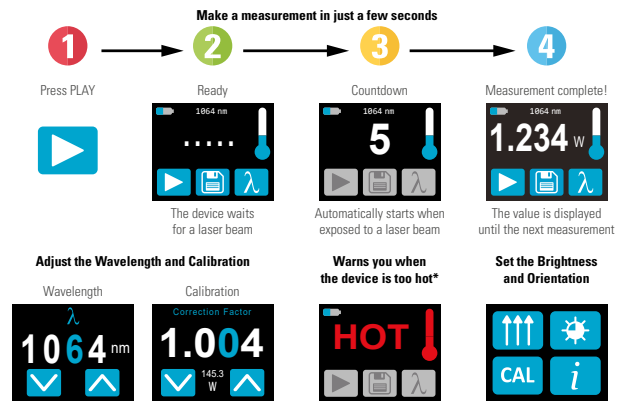

* Device may get hot, it is not recommended for handheld use when making a measurement

3 MODELS FOR ALL YOUR MEASUREMENT NEEDS

- **PRONTO-250**
PRONTO-250 is very easy to use and will give you accurate one shot measurements, thanks to its unique measurement mode:
 - Single shot power (SSP): up to 250 W
- **PRONTO-250-PLUS**
PRONTO-250-PLUS comes with 3 measurement modes and can be used in a variety of applications:
 - Single shot power (SSP): up to 250 W
 - Continuous power (CWP): up to 8 W
 - Single shot energy (SSE): up to 25 J
- **PRONTO-50-W5**
This model has our proprietary absorber with extremely high damage thresholds to handle tightly focused beams without damaging the absorber.
 - Single shot power (SSP): up to 50 W

CONNECTIVITY



HANDS-FREE






DATA TRANSFER TO PC

PRONTO

Specifications

CE NIST*
Traceable
*Also traceable to NRC-CNRC



| | PRONTO-250 | PRONTO-250-PLUS | PRONTO-50-W5 | | |
|--|--|--|--|--|---|
| | | SSP Mode Measures in 5 s | CWP Mode Measures power continuously | | |
| | | | SSE Mode Measures in less than 0.5 s | | |
| MAX AVERAGE POWER/ENERGY | 250 W | 250 W | 8 W | 25 J (up to 150 J for pulses >1 ms) | 50 W |
| EFFECTIVE APERTURE | 19 mm ϕ | 19 mm ϕ | | | 19 mm ϕ |
| INTERFACE | Touchscreen color LCD display | Touchscreen color LCD display | | | Touchscreen color LCD display |
| MEASUREMENT CAPABILITY | | | | | |
| Spectral range | 0.19 - 20 μm | 0.19 - 20 μm | | | 0.19 - 10 μm |
| Calibrated spectral range | 0.248 - 2.5 μm and 10.6 μm | 0.248 - 2.5 μm and 10.6 μm | | | 0.248 - 2.5 μm |
| Noise equivalent power/energy | 10 mW | 10 mW | 10 mW | 60 mJ | 4 mW |
| Minimum measurable power/energy | 0.5 W | 0.5 W | 0.2 W | N/A | 0.5 W |
| Exposure time | 5 s | 5 s | 1.5 s response time | 0.26 s | 5 s |
| Measurement accuracy | $\pm 3\%$ | $\pm 3\%$ | $\pm 2.5\%$ | $\pm 5\%$ | $\pm 3\%$ |
| Min repetition period (Max pulse width) | N/A | N/A | N/A | 4 s (88 ms) | N/A |
| Display resolution | 1 mW | 1 mW | 1 mW | 10 mJ | 1 mW |
| DAMAGE THRESHOLDS | | | | | |
| Maximum average power density^a | 45 kW/cm ² (at 1064 nm, 10 W, CW) 14 kW/cm ² (at 10.6 μm , 10 W, CW) | 45 kW/cm ² (at 1064 nm, 10 W, CW) 14 kW/cm ² (at 10.6 μm , 10 W, CW) | | | 100 kW/cm ² (at 1064 nm, 10 W, CW) |
| Maximum exposure time^b | 6 s | 6 s | N/A | N/A | 6 s |
| Maximum device temperature^b | 65°C | 65°C | 40°C | 40°C | 65°C |
| USER INTERFACE | | | | | |
| Measurement controls | Wavelength selection and user calibration | Wavelength selection and user calibration | | | Wavelength selection and user calibration |
| Measurement modes | Single Shot Power (SSP) | Single Shot Power (SSP), Continuous Power (CWP) and Single Shot Energy (SSE) | | | Single Shot Power (SSP) |
| Data acquisition and transfer | Yes | Yes | | | Yes |
| GENERAL SPECIFICATIONS | | | | | |
| Display type | Touchscreen color LCD | Touchscreen color LCD | | | Touchscreen color LCD |
| Display size | 28.0 x 35.0 mm (128 x 160 pixels) | 28.0 x 35.0 mm (128 x 160 pixels) | | | 28.0 x 35.0 mm (128 x 160 pixels) |
| Data storage | 50 000 pts | 50 000 pts | | | 50 000 pts |
| Battery type | Rechargeable Li-ion | Rechargeable Li-ion | | | Rechargeable Li-ion |
| Battery life | 17 hours or 4 200 measurements (with brightness set at 25%) | 17 hours or 4 200 measurements (with brightness set at 25%) | | | 17 hours or 4 200 measurements (with brightness set at 25%) |
| Battery recharge via | USB port | USB port | | | USB port |
| PHYSICAL CHARACTERISTICS | | | | | |
| Effective aperture | 19 mm ϕ | 19 mm ϕ | | | 19 mm ϕ |
| Absorber | H9 | H9 | | | W5 |
| Mounting holes (for post) | 2 x 8-32 | 2 x 8-32 | | | 2 x 8-32 |
| Dimensions | 59.0W x 181.4L x 17.0D | 59.0W x 181.4L x 17.0D | | | 59.0W x 181.4L x 17.0D |
| Weight | 210 g | 210 g | | | 210 g |
| ORDERING INFORMATION | | | | | |
| Compatible stand | STAND-S-233 | STAND-S-233 | | | STAND-S-233 |
| Product page |  |  | | |  |

a. To get all the damage thresholds, see User Manual.
b. At maximum power.

Specifications are subject to change without notice