



Data Sheet

## VIAVI T-BERD/MTS Platforms

### Optical Dispersion Measurement Module

The VIAVI Solutions T-BERD®/MTS-6000, -6000A, and -8000 Optical Dispersion Measurement (ODM) module offers chromatic dispersion (CD), polarization mode dispersion (PMD), and attenuation profile (AP) test functions in one plug-in module. It is the industry's most compact and integrated dispersion solution dedicated to field testing fiber optic networks. The module includes a patented solution for CD measurement.

Today's fiber networks must meet exacting performance requirements to withstand the demands of widespread broadband access technology deployment. In addition to deploying fiber infrastructures that perform perfectly, network operators must reduce operating expenses while adding new revenue-generating services, all within an ever increasingly complex environment.

Both T-BERD/MTS test platforms provide an ideal, all-in-one solution that meets these challenges. The T-BERD/MTS platforms leverage small, rugged, and highly integrated plug-in modules that are battery operated, completely within drop-tested housing. The weather-resistant design and long battery life make them ideally suited for field use. Their modularity allows for easy field upgrades to technologies and advanced options that support the new and ever changing needs of field technicians.

#### Key Features

- Combined CD, PMD, and AP in one plug-in module
- The most integrated dispersion solution dedicated to field testing
- Patented phase shift solution for CD measurement
- Complete and accurate fiber characterization over the entire wavelength range (1260–1640 nm) with measurement points

#### Key Applications

- Test very high speed networks (40 Gb/s and higher)
- Test DWDM/CWDM systems
- Test amplified links
- Test Metro, long haul, and very long haul fiber optic links



T-BERD/MTS-8000



T-BERD/MTS-6000



### The right testing combination

The ability to measure CD, PMD, and AP is essential during fiber characterization, which is a series of tests performed to identify fiber viability for very high-speed transmission systems. These tests include 10 Gigabit Ethernet (GigE) and 40 G in both the installation and maintenance phases. If not properly managed, CD, PMD, and AP severely degrade transmission quality that must operate optimally to deliver reliable broadband services. The combination of CD, PMD, and AP test functions lets technicians validate the compatibility of the fiber link with high-speed coarse wavelength division multiplexing (CWDM)/dense wavelength division multiplexing (DWDM) system implementation including reconfigurable optical add/drop multiplexer (ROADM) networks. The performance of each function makes the ODM module the right tool for characterizing fiber at transmission speeds of 40 Gb/s and higher.

#### Chromatic Dispersion

- Two-ended test using one fiber based on phase shift method
- Full wavelength range characterization
- Suitable for any fiber type
- High dynamic range up to 55 dB

#### Polarization Mode Dispersion

- Based on the fixed analyzer method using fast Fourier transform (FFT)
- Established in the market
- High dynamic range up to 65 dB

#### Attenuation Profile


- dB loss/km over the full wavelength range: 1260–1640 nm
- Allows CWDM and DWDM transmission band characterization
- Water peak (1383 nm area) characterization

### High-performance solution

In addition to its high level of integration and industry-leading field test performance features, all test methods used in the ODM module are approved and/or referenced by all international standardization bodies.

Its high dynamic range (up to 65 dB), wide wavelength acquisition range, repeatability, and high level of accuracy make it the product of choice for reliable fiber characterization. High-performance features include:

- Test through non-bidirectional components, including erbium doped fiber amplifiers (EDFAs) and filters
- Very fast acquisition time (from 40 to 80 seconds) with minimum 500 acquisition points
- Accurate zero-wavelength characterization on G.652 fiber
- One input port for any test configuration

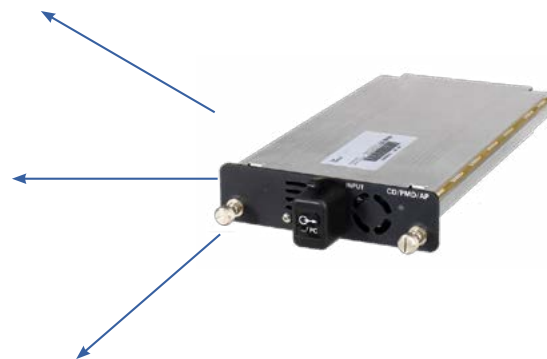

VIAVI T-BERT/MTS Platforms ODM Module

### Field-dedicated solution

Housed in the T-BERD/MTS platforms, the ODM module offers the highest level of integration and ruggedness.

When used in tandem with another T-BERD/MTS or a VIAVI handheld source, the ODM module accommodates many fiber optic field measurement conditions. Its size and weight makes it the best solution for outside plant testing. Its suite of personal computer interfaces and remote control capability are the perfect fit for indoor use.

- Most compact dispersion test solution in the market
- A shock- and vibration-proof instrument with no moving parts (drop tested at 70 cm)
- Internal/online wavelength referencing
- Rugged, handheld, battery-operated light source

### Intuitive, easy-to-use user interface

The T-BERD/MTS user interface enables any technician to quickly learn to use the three primary ODM test functions.

- No specific setup required
- No acquisition points and test time selection
- Customized wavelength range with pre-defined CWDM and DWDM ITU grid
- Pass/fail indication with predefined values according to bit rate

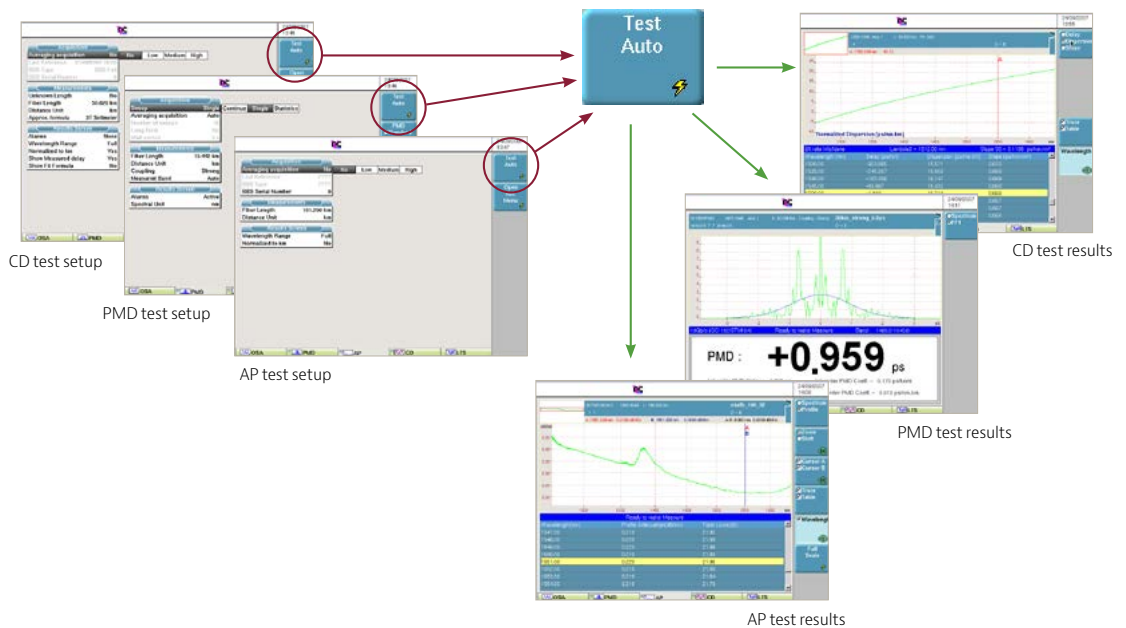


Figure 1 Test results provided at the touch of a button

VIAVI T-BERT/MTS Platforms ODM Module

## Specifications

ODM Module–Typical Specifications <sup>1</sup> at 25°C		
Weight	600 g (1.32 lbs)	
Dimensions (w x h x d)	213 x 124 x 32 mm (8.38 x 4.88 x 1.26 in)	
Optical interfaces		
Applicable fiber	SMF 9/125 μm	
Interchangeable optical connectors	FC, SC, DIN, LC	
Attenuation Profile		
Dynamic range <sup>6</sup>	55 dB 60 dB <sup>2</sup>	
Wavelength uncertainty	±0.1 nm	
Measurement time <sup>10</sup>	6 s	
Measurement uncertainties <sup>11</sup>		
at 1310 nm	0.006 dB/km	
at 1550 nm	0.003 dB/km	
at 1625 nm	0.004 dB/km	
Polarization Mode Dispersion		
Dynamic range <sup>6</sup>	58 dB 65 dB <sup>2</sup>	
PMD measurement range <sup>7</sup>	0.08 to 130 ps	
PMD absolute uncertainty <sup>8,9</sup>	±0.02 ps ±2% PMD	
PMD repeatability <sup>8,9</sup>	0.025 ps	
Measurement time <sup>10</sup>	16 s, independent of PMD value	
Chromatic Dispersion Measurement		
Wavelength range	1260–1640 nm	
Wavelength uncertainty	±0.1 nm	
Minimum length	1 km	
Dynamic range (dB)	45 dB 55 dB <sup>2</sup>	
	<b>80 km G.652</b>	<b>10 km G.655</b>
Zero dispersion wavelength uncertainty (nm)	±1.5	±1.5
Zero dispersion wavelength repeatability <sup>3</sup> (nm)	0.1	0.1
Dispersion uncertainty <sup>4,5</sup> (ps/nm.km)	±0.05	±0.1
Dispersion repeatability <sup>3,4</sup> (ps/nm.km)	0.005	0.005
Slope at zero wavelength repeatability <sup>3</sup>	0.5%	0.1%
Measurement time	40 to 80 s	

VIAVI T-BERT/MTS Platforms ODM Module

## Ordering Information

ODM Module	
Description	Part Number
Chromatic dispersion test module (1260–1640 nm)	E81CD
Chromatic dispersion + PMD + Attenuation profile test module (1260–1640 nm)	E81DISPAP
PMD Test module	E81PMD
Broadband Source	
Handheld Broadband source for CD/PMD/AP (1460–1640 nm)	EOBS550
High dynamic range (1525–1570 nm)	
Broadband Source module for CD/PMD/AP (1260–1640 nm)	E81BBS2A

- With broadband source (BBS) module E81BBS2A unless specified
- With handheld broadband source OBS550 in high dynamic mode
- Repeatability refers to the typical one-sigma standard deviation value, obtained for systems cycling over 20 measurements
- 1530–1570 nm band
- Excluding reference fiber uncertainties
- With averaging
- Up to 60 ps in strong mode coupling
- Weak mode coupling, between 0.1 ps and 60 ps DGD range
- Up to 35 dB attenuation and NPL standard traceable
- Minimum value without averaging
- Measured with 80 km G.652 fiber

## VIAVI Care Support Plans

Increase your productivity for up to 5 years with optional VIAVI Care Support Plans:

- Maximize your time with on-demand training, priority technical application support and rapid service.
- Maintain your equipment for peak performance at a low, predictable cost.

For more Information: go to [viasolutions.com/viavicareplan](https://viasolutions.com/viavicareplan)

### Features

\*5-year plans only

Plan	Objective	Technical Assistance	Factory Repair	Priority Service	Self-paced Training	5 Year Battery and Bag Coverage	Factory Calibration
 BronzeCare	Technician Efficiency	Premium	✓	✓	✓		
 SilverCare	Maintenance & Measurement Accuracy	Premium	✓	✓	✓	✓*	✓

© 2020 VIAVI Solutions, Inc.  
Product specifications and descriptions in this document are subject to change without notice.  
mstbodemmodule-ds-fop-tm-ae  
30149323 903 0120