

NEW

Optical Fiber Identifier

ID-H/R v3

Advanced, compact and simple to operate the new FITEL
Fiber Identifier offers enhanced fiber detection



※ Full size

- Improved traffic direction recognition, even in brightly lit environments. 10 times increased sensitivity.
- Enhanced sensitivity using the light receiving adjustment function.
- The increased display functionality shows the communication light intensity in the optical fiber.
- G657 A2 optical fiber (ITU R7.5) can also be identified.
- The device does not require head changes or adjustments.
- Wide dynamic range.
- The brighter LED display provides improved clarity.


■ Construction

Ordering code	Product name	Code	Package details
ID-H/R v3	Main unit	A102H03	Includes battery, strap and instruction manual
	Carry case	A102H-001	With belt or tool case loop

**FURUKAWA
ELECTRIC**

ID-H/R v3

Example of Application

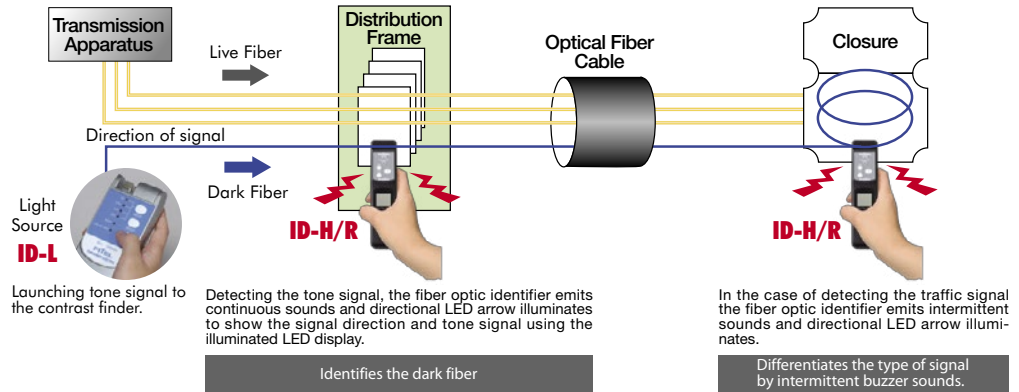

※Make sure to launch tone signal to the dark fiber and confirm the detection before disconnecting it.

Specification

Item	Specification		
Applicable Fiber	Up to SM12-fiber ribbon SM 250 μ m single fiber	Up to 3mm Cordage (built-in only SM 250 μ m single fiber)	SM 900 μ m tight buffer (Reference value)
Applicable Wavelength	900 to 1700nm		
Receiving Frequency	270Hz and 1kHz and 2kHz (Duty ratio 50 \pm 10%) Modulation light No modulation light Communication light that continues		
Measurement Range of Optical power*1)	0 ~ -80dBm		
Maximum Level of Insertion Loss (Typical)	1310nm	0.1dB	0.5dB
	1550nm	1.0dB	2.0dB
	1650nm	2.5dB	3.0dB
Average Minimum Detection Level (Typical)*2)	1310nm	-40dB	-30dB
	1550nm	-50dB	-40dB
	1650nm	-50dB	-15dB
Indication for Traffic Signal or Tone Signal	【Traffic Signal*3】 Direction LED illuminates + Intermittent buzzer sound + Displays an optical power measurement range on the LCD 【Tone Signal】 Direction LED illuminates + Tone LED illuminates + Continuous buzzer sound + Displays an optical power measurement range on the LCD + Displayed frequency on the LCD		
Operating Time	8 hours (Using Alkaline battery)		
Item	Storage temperature	-20 to 60°C (humidity 0 to 95%)	
	Operation temperature	-10 to 50°C (humidity 0 to 95%)	
Size	40W \times 65H \times 163Dmm		
Weight	170g (Including battery)		

* 1) Duty ratio 50%

* 2) This specification is based on our optical fiber with our test method.

* 3) DO NOT disconnect or rewire based only on the traffic signal detection. Make sure to launch the tone signal before disconnecting or rewiring the fiber.

Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in Japan.
In addition, the Export Administration Regulations (EAR) of the United States may be applicable.
In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost.
Please contact the Ministry of Economy, Trade and Industry of Japan or the Department of Commerce of the United States for details about procedures.

ASYT-15080

JE-216 2H2 TR 200