

Si-APD-Array SAH1L16-Series

Description


The SAH1L16-Series is a linear Si-APD-array with 16 elements in a LCC44 package with protective window. Responsivity is optimised for 850 nm.

Features

- 16 element APD array
- Very narrow gap
- High quantum efficiency
- Low noise, high speed
- 620 μm x 190 μm active area per element
- Wide operating temperature range
- Low crosstalk

Applications

- Rangefinding
- LIDAR ACC
- Laser scanner

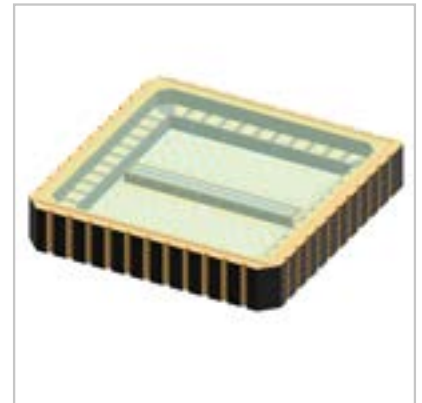**Germany & Other Countries**

Laser Components Germany GmbH
Tel: +49 8142 2864 - 0
Fax: +49 8142 2864 - 11
info@lasercomponents.com
www.lasercomponents.com

France

Laser Components S.A.S.
Tel: +33 1 39 59 52 25
Fax: +33 1 39 59 53 50
info@lasercomponents.fr
www.lasercomponents.fr

United Kingdom

Laser Components (UK) Ltd.
Tel: +44 1245 491 499
Fax: +44 1245 491 801
info@lasercomponents.co.uk
www.lasercomponents.co.uk

Nordic Countries

Laser Components Nordic AB
Tel: +46 31 703 71 73
Fax: +46 31 703 71 01
info@lasercomponents.se
www.lasercomponents.se

USA

Laser Components USA, Inc.
Tel: +1 603 821 - 7040
Fax: +1 603 821 - 7041
info@laser-components.com
www.laser-components.com

Electro-Optical Characteristics, $T_a = 25\text{ }^\circ\text{C}$

| Parameter | Condition | Min | Typ | Max | Unit |
|-----------------------------|--|-----------|---------|----------|---------------|
| # of elements | | 16 | | | |
| Active area | | 620 x 190 | | | μm |
| Gap | | 40 | | | μm |
| Dark current I_d | $M = 100, \lambda = 905\text{ nm}$, per element | | 4 | 10 | nA |
| Capacitance, C | $M = 100$, per element | | 3 | | pF |
| Responsivity, R_l | $M = 100, \lambda = 905\text{ nm}$ | 40 | 50 | | A/W |
| Rise time, t_r | $M = 100, \lambda = 905\text{ nm}, R_l = 50\text{ Ohms}$ | | 1000 | | psec |
| Breakdown voltage, V_{BR} | $I_R = 10\text{ }\mu\text{A}$ | 80 | 150 | 200 | V |
| Temperature coefficient | $I_R = 10\text{ }\mu\text{A}$ | | 0.44 | | V/K |
| Crosstalk | $\lambda = 905\text{ nm}$ | | 50 | | dB |
| Dark current uniformity | $M = 100$ | | ± 5 | ± 20 | % |
| Photo current uniformity | $M = 100, \lambda = 905\text{ nm}$ | | ± 5 | ± 20 | % |

Absolute Maximum Ratings

| Parameter | | Min | Max | Unit |
|-----------------------------|----------|-----|-------|------------------|
| Storage temperature | | -55 | 100 | $^\circ\text{C}$ |
| Operating temperature | | -40 | 85 | |
| Soldering (15s) | | | 260 | |
| Reverse current (Peak) | CW | | 0.200 | mA |
| | 1s Pulse | | 1 | |
| Forward current (Avg) | CW | | 10 | |
| | 1s Pulse | | 50 | |
| Max total power dissipation | | | 60 | mW |

Curves

Fig. 1: Spectral Response

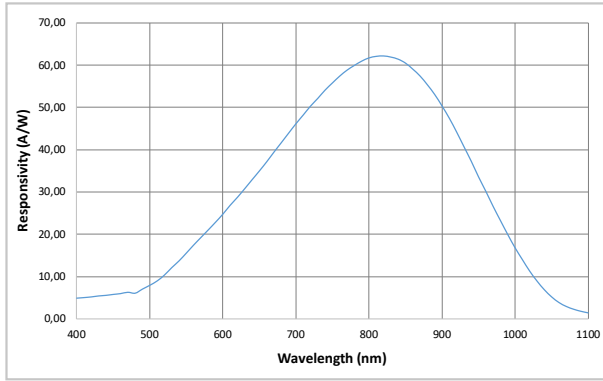


Fig. 2: Quantum Efficiency

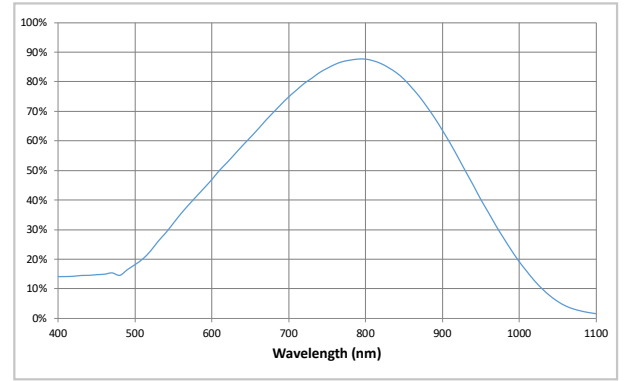


Fig. 3: Multiplication

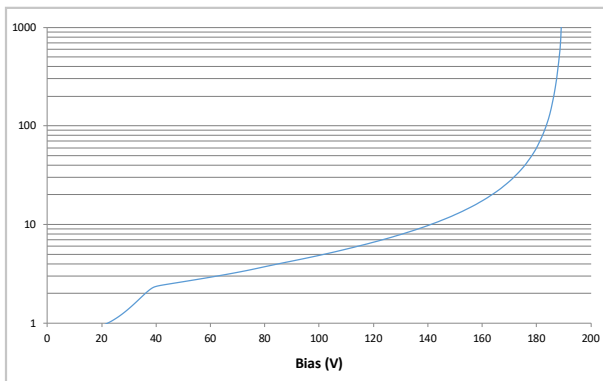


Fig. 4: Current vs. Reverse Voltage

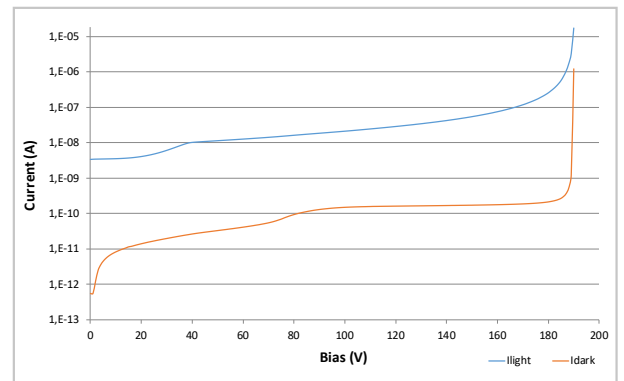


Fig. 5: Capacitance vs. Reverse Voltage



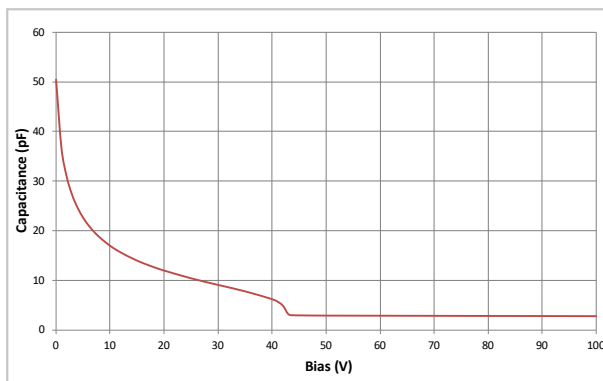



Fig. 6: Spot Scan

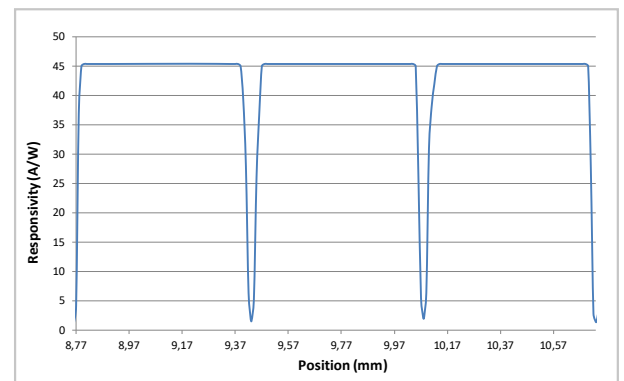

Product Number Designation

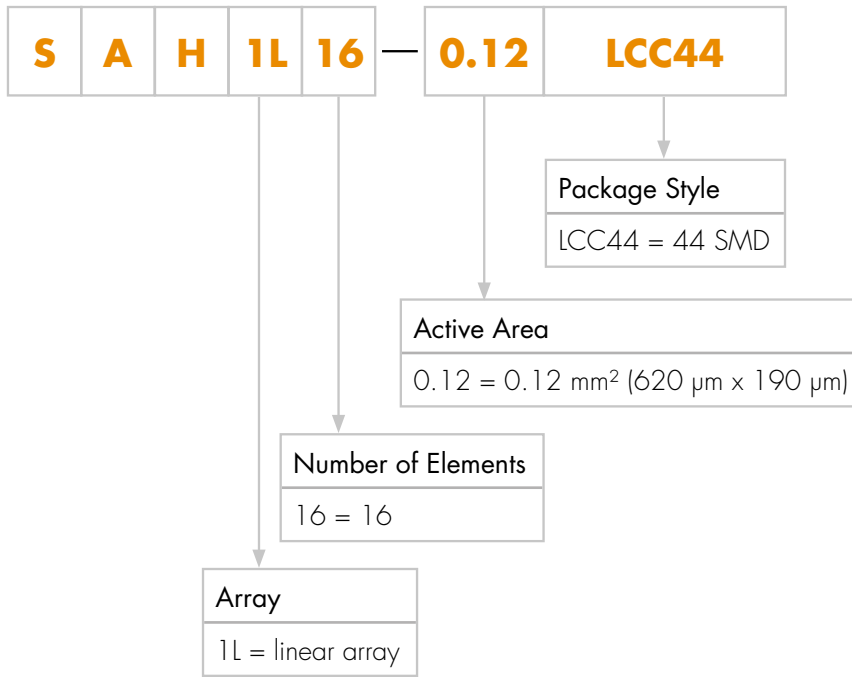

Package Drawings

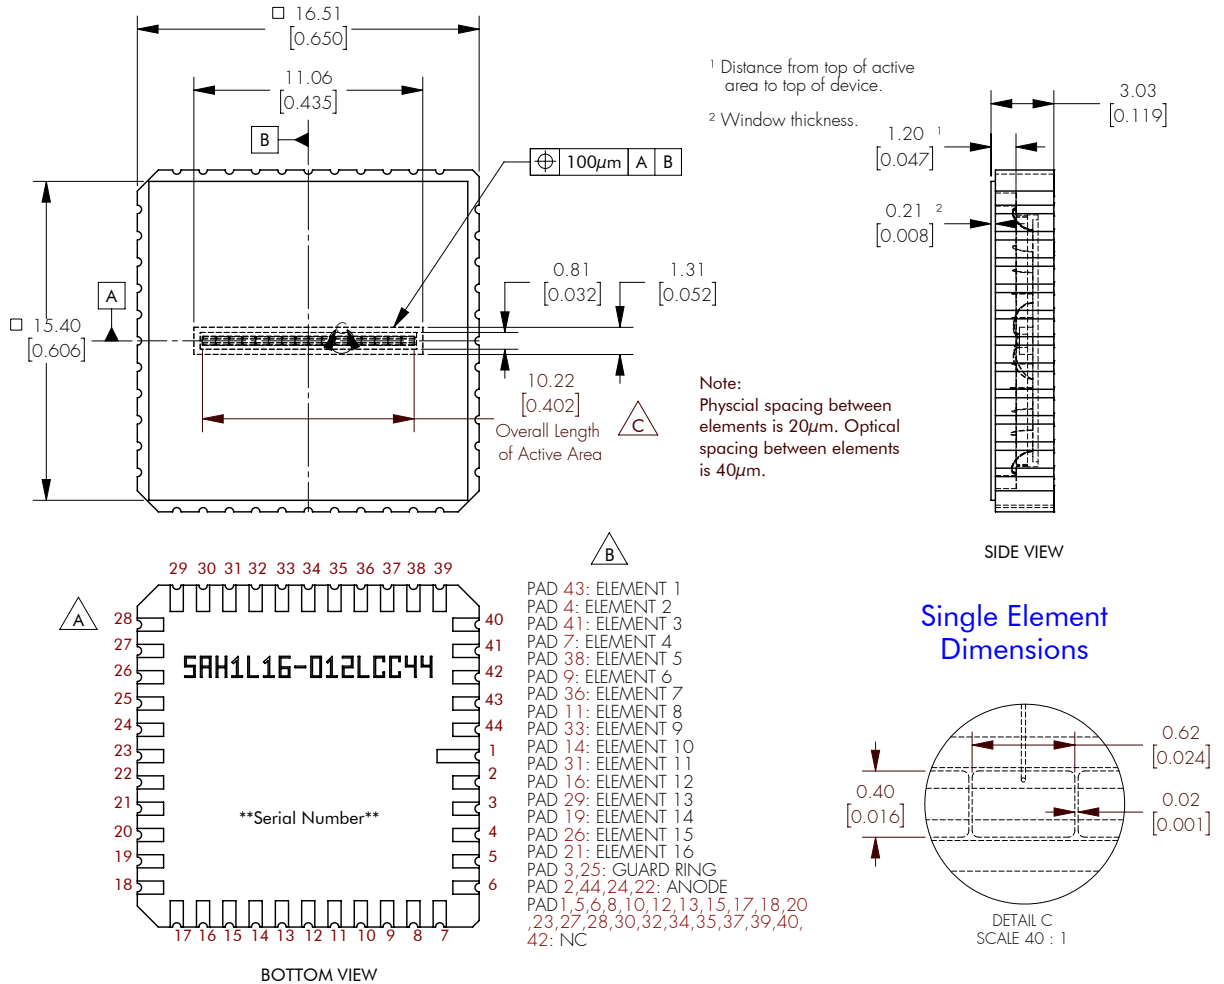

Product Changes

LASER COMPONENTS reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application.

Ordering Information

Products can be ordered directly from LASER COMPONENTS or its representatives. For a complete listing of representatives, visit our website at www.lasercomponents.com. Custom designed products are available on request.