





DAISI MT-V3

Digital Automated Interferometer for Surface Inspection of multi-fiber connectors

The DAISI MT-V3 interferometer is the industry reference for MT product measurements, based on the same design philosophy that made the DAISI a success. DAISI MT-V3 have been designed for use in production and field applications.

In 2019 the measurement speed have been largely optimized. Measurement + calculation time is now better than 5 seconds for MT-12 based connectors.

With the **Blink software** Platform, DAISI is able to measure end face geometry on single-fiber or multi-fiber connectors or ferrules. The Blink software platform is the easiest way to produce customised control reports.

SPECIFICATIONS:

Field of view (mm):	5.6 x 3.0
Scan mode :	Red light and White light
X and Y angles (°):	\pm 1 deviation, 0 (PC) to 8 (APC)
Fiber Height (μm) :	Up to 20
Measurement speed (sec.):	< 5 (MT12)
Lateral resolution (µm):	2.5 max.
Outputs:	USB 2.0 + USB 3.0
Power source :	External 12 V
Dimensions HxWxL (mm):	133 x 171 x 244
Weight (kg):	6

KEY FEATURES:

Measurement of PC and APC connectors, ferrules, single-fiber and multi-fiber

True phase-shifting interferometer

Non-contact measurement

Smart autofocus, only focus when required

Automatic calibration of reference mirror

Supports MT-16 and MT-12 based connectors


Vibration insensitive

Easy and fast switching from PC to APC, no change of fiber holder required

Compliance with Industry Standards for Interferometer Measurements


Intuitive BLINK software, with data-base connectivity

Compatible with desktop PC, laptop, tablet PC



04/23 / V04 / MO-LB / data-pixel/daisi-mt



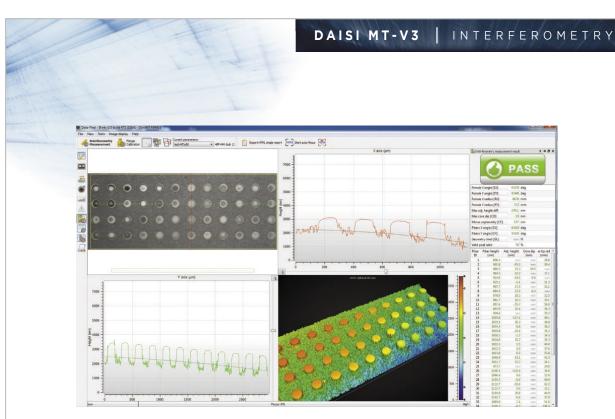

Blink is a software platform common to all Data-Pixel products. Dedicated plugins supports the Interferometry range of products: 3D Scope-V2, Daisi-V3 and Daisi MT-V3.

PDF, HTML and CSV reporting capability with extensive database support (SQL Server, MySQL, ODBC, ORACLE,...)
OLE automation support is available for dedicated application

ORDER OPTIONS:

DAISI MT-V3 unit with Blink automated interferometry - Blink interferometry - 2 flanges (Male/female, 12/24 or 16/32) - 2 adapters (MT ferrule or MPO)	71-DAMT-V3-A02-00
Flange MT 12/24 Male	10-FL-001354
Flange MT 16/32 Male	30-FL-001729
Flange MT 12/24 Female	30-FL-001355
Flange MT 16/32 Female	30-FL-001357
Adapter MT ferrule 12/24 and 16/32	30-AD-001020
Adapter MPO 12/24	10-AD-001017
Adapter MPO 16/32	30-AD-001776
Flange 2.50mm, manual	30-FL-001384
Flange 1.25mm, manual	30-FL-001383