

Green Laser Diode Module LC-LMD-525-120-01-B


1 mW Green Laser Module

Features


1. APC (auto power control) driver circuit
2. Wide input voltage range (3~ 6 VDC)
3. Stable output power of <1mW
4. High quality glass lens for output beam

Applications

5. General purpose green laser light source
6. Industrial laser marker
7. Laser leveler

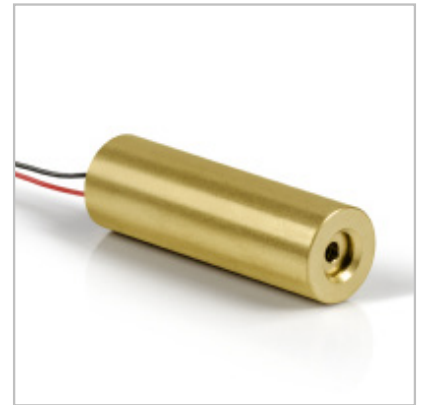

Part No. Indications:

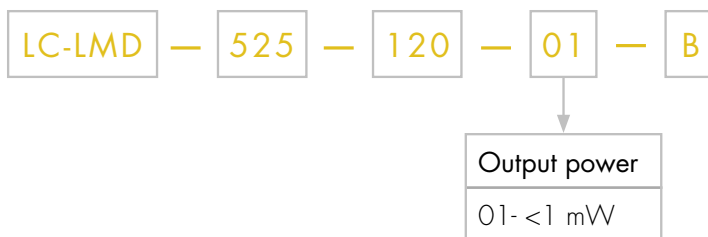


Absolute Maximum Ratings

Item	Symbol	Rating	Unit
Power supply voltage	V_{cc}	6	V
Laser module optical output power	P_o	1	mW
Operation case temperature	T_c	0~60	°C
Storage temperature	T_{stg}	-40~80	°C

Electrical and Optical Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit	Condition
Wavelength	λ	510	-	525	nm	$P_o = 1 \text{ mW}$
Output power	P_{out}		<1		mW	$V_{cc} = 3 \text{ V}$
Operation current	I_{op}	-	180	250	mA	$P_o = 1 \text{ mW}$ $V_{cc} = 3 \text{ V}$
Operation voltage	V_{op}	3		6	Volt	
laser beam spot size at 10 m			<15 mm			
Divergence angle			1.5 mrad			

Outline Dimensions (Units mm)

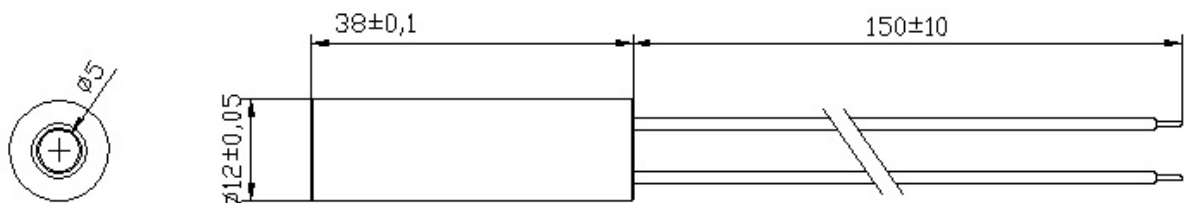

Unit: mm

Red wire: V_{cc}

Black wire: GND

B type: Heat sink stand (+)

Laser Safety Precautions

1. Do not look into the laser beam directly by eyes. The laser beam may cause severe damage to human eyes.
2. Optical lens is made of glass. Do not contaminate lens by soiling, oil or chemical.