

Laser Safety Goggles LVI-T1Q06


These laser safety goggles can be used as **laser protection** in defined wavelength ranges.

Filter T1Q06

Specifications

- Protection levels certified according to DIN EN 207
- Glass filter, approx. 11 – 12 mm thick
- Colour: green, turquoise
- VLT (Visible Light Transmission): approx. 25%

Transmission Curve

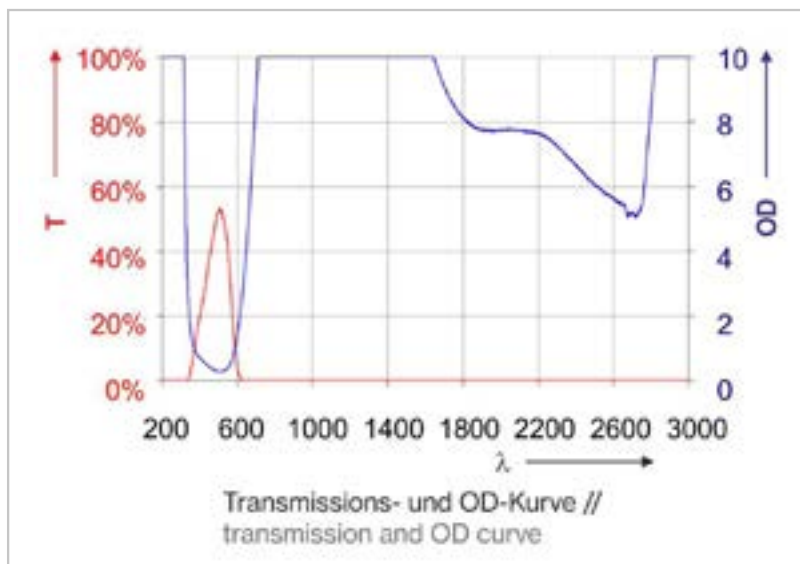

Frames

- **R01** - Article R01.T1Q06.1001 small, reinforced goggles with adjustable temples.

Protection Levels

Wavelength [nm]	OD	Protection Levels
620 – <680	OD2+	DIRM LB2
680 – <690	OD7+	DIRM LB6
690 – <750	OD10+	D LB7 + IRM LB8
750 – 1400	OD10+	D LB7 + IM LB9 + R LB8
>1400 – 1580	OD9+	D LB5 + I LB5Y + R LB3Y + M LB4Y
>1580 – 3000	OD5+	D LB5 + I LB5Y + R LB3Y + M LB4Y
>3000 – 11500	OD10+	D LB5 + I LB5Y + R LB3Y + M LB4Y



Frame R01

- **R14** - Article R14.T1Q06.1002 with **foam frame**, fits over most prescription glasses.
- **R14** - Article R14.T1Q06.1003 with **lip seal**, fits over most prescription glasses.
- **R14** - Article R14.T1Q06.1004 with an **aired foam frame**, fits over most prescription glasses.

Protection Levels

Wavelength [nm]	OD	Protection Levels
620 – <680	OD2+	DIRM LB2
680 – <690	OD7+	DIRM LB6
690 – <750	OD10+	D LB7 + IRM LB8
750 – 1400	OD10+	D LB7 + IM LB9 + R LB8
>1400 – 1580	OD9+	D LB5 + I LB5Y + R LB3Y + M LB4Y
>1580 – 3000	OD5+	D LB5 + I LB5Y + R LB3Y + M LB4Y
>3000 – 11500	OD10+	D LB5 + I LB5Y + R LB3Y + M LB3



Frame R14