

Laser Safety Goggles LC-38-DIA

These laser safety goggles can be used as **alignment protection** and **laser protection** in defined wavelength ranges.

Filter DIA

Specifications

- Protection levels certified according to DIN EN 207 and DIN EN 208
- Polycarbonate filter, approx. 2 mm thick
- Colour: blue
- VLT (Visible Light Transmission): approx. 39%




Frame LC-38

Protection Levels

Wavelength [nm]	Protection Levels	OD
180 – 315	D LB6 + R LB4	5+
>315 – 395	DR LB4	5+
605 – 675	DI LB1	
>675 – 695	DI LB2	1.5+
>695 – 700	DI LB1	1.5+
605 – 642	0.01W 2*10E-6J RB1	
643 – 695	0.1W 2*10E-5J RB2	

Transmission Curve

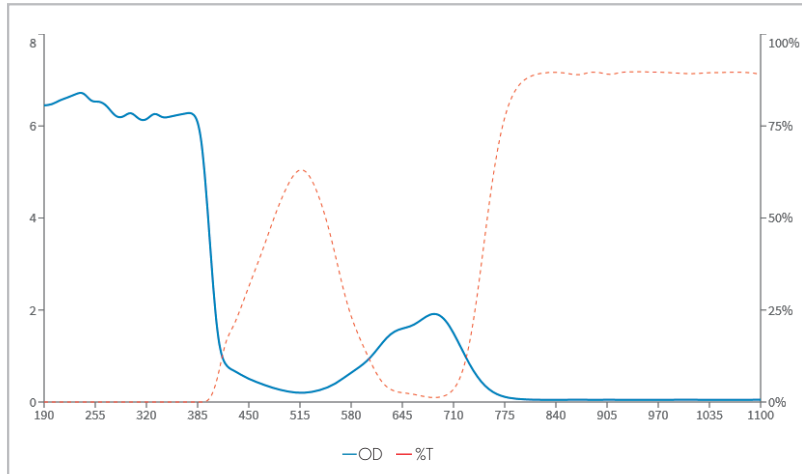

Frame LC-38

- Frame LC-38 fits over most prescription glasses.