

## Test and Inspection



### Features

- Multimode or single-mode applications
- Wave ID (auto identification/switching)
- Multiple-wavelength testing
- 270 Hz, 330 Hz, 1 kHz, 2 kHz tone detection
- Large LCD with backlight
- Power measurements in dBm or µW; insertion loss in dB
- Reference power level storage
- File management system organizes stored test data
- Storage capability > 500 fibers
- USB port and Windows® compatible software for download of stored data
- Power externally via USB port
- Automatic power-off function
- Battery gauge
- Long battery life with 2 AA alkaline, optional AC adapter
- Hand-held, rugged, lightweight

## NOYES® OPM5 Optical Power Meter

### With Innovative File Management System

The NOYES OPM5 is a full-featured, hand-held optical power meter designed for measuring optical power in premise, Telco, or broadband networks and for performing insertion loss measurements on multimode or single-mode fiber optic links. The standard Wave ID feature (when used with NOYES OLS series light sources) automatically detects and sets the wavelength(s), preventing setup and measurement errors. It significantly increases efficiency and reduces technician errors—and saves testing time—by eliminating the need to test each wavelength individually. The OPM5 stores optical references for each calibrated wavelength and offers multiple test tone detection for fiber identification. The OPM5 is fully N.I.S.T. traceable.

### Data Storage of Test Results


The OPM5 File Management system allows technicians to organize test results into multiple files and transfer stored results via USB to a PC for analyzing, generating reports, and printing. The supplied powerful PC Analysis and Reporting Tool (TRM® - Test Results Management software) allows users to apply industry-standards-based rules to test results and create comprehensive certification reports. Users can generate network Pass/Fail results demonstrating compliance to industry standards and illustrate headroom. TRM® is a Windows® compatible software.

### Applications

- Passive Optical Networks (PON) testing
- Save test data for Report Generation with NOYES TRM® Software
- OPM5-2D (Ge) for Premises LAN/WAN multimode or single-mode networks
- OPM5-3D (InGaAs) for Telecommunications networks
- OPM5-4D (Filtered-InGaAs) for high power (+26 dBm) CATV Broadband networks or DWDM system applications

## Test and Inspection

### **NOYES® OPM5 Optical Power Meter with PC Reporting Tool – TRM®**

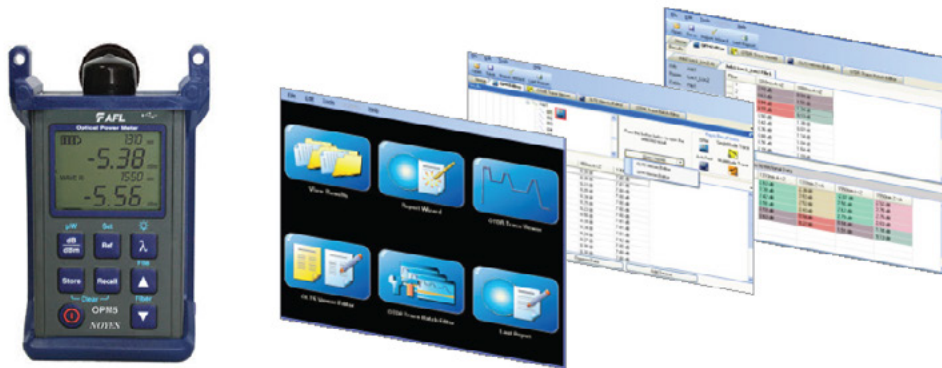

#### **Powerful Pair**

The OPM5 Optical Power Meter and TRM® Test Results Management software are a powerful pair.

- Increases efficiency
- Reduces technician errors
- Simple to operate with minimal training required
- Provides customized professional reports

#### **Target Markets**

Anyone testing fiber links who requires report generation applications include:

- Data networks
- Telecommunications providers
- CATV
- Industrial

#### **WaveID Increases Efficiency and Reduces Errors**

- Enables users to test two wavelengths simultaneously
  - Significantly reduces test time by eliminating the need to test each wavelength individually
- Automatically detects and sets received wavelengths
  - Eliminates loss measurement errors by automatically matching OPM to transmitted wavelength

#### **Straightforward Results Storage and Easy File Management in the Field**

- Simple-to-use interface allows for easy separation of results into files
- Keep cable/job results separated for fast customer report generation
- Access to files and results allows for quick and easy retest of fibers

## Test and Inspection

### NOYES®

## Upload test data files to PC via USB to utilize powerful data management and reporting tool – TRM®

### File Naming and Data Management Editor

- Manage job information (Ends, Cable ID, Comments, and Operators) to meet documentation specifications in reports
- Create bi-directional results
- Combine results from multiple OPMs to create a complete job report
- Automatic backup of data

### Create Certification Results to Industry Standards (TIA/ISO/EN and applications)


- Apply standards-based rules to loss results
- Generate Pass/Fail information for each fiber
- Demonstrate compliance to industry standards

### Customized Reports

- Create professional personalized reports with company logos
- Reports meet accepted industry documentation standards
- Save common report options for quick generation of future reports
- Recall previously stored settings to save time generating reports for repeat customers
- Create certification reports showing fiber Pass/Fail results based on customer/consultant specifications, Industry Standard, and Industry Applications
- Show headroom values for the primary rule (typically the industry standard)
- Use PC analysis to verify if previously measured fibers (tested with NOYES loss test equipment) meet loss requirements of Standards and Rules

### Superior Customer Support

- Dedicated customer service, technical support and field sales available to support customers
- Knowledgeable timely technical support and customer service

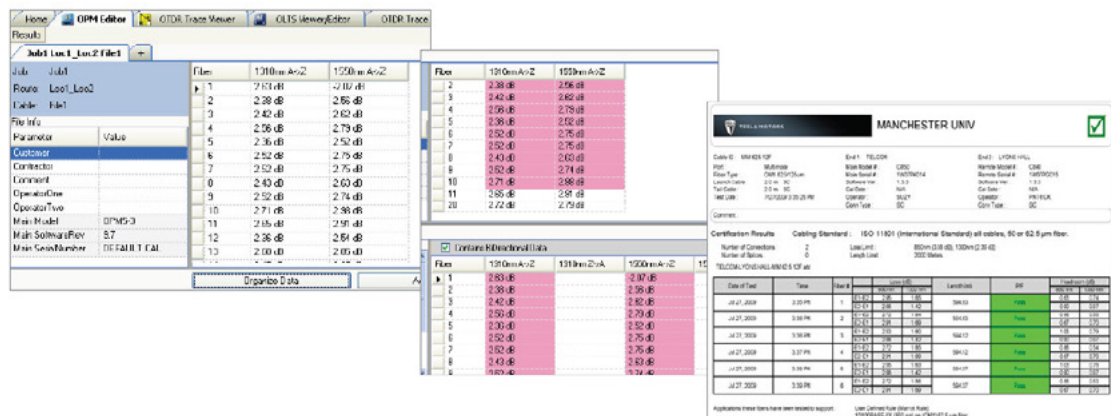

The screenshot displays the NOYES TRM software interface. It features several data tables and a certification report window.

**Table 1: Job1 Loss1\_Loss2 Fail1**

Fiber	1310nm-A-to-Z	1270nm-A-to-Z
1	2.151 dB	2.111 dB
2	2.30 dB	2.56 dB
3	2.42 dB	2.62 dB
4	2.56 dB	2.79 dB
5	2.36 dB	2.52 dB
6	2.52 dB	2.75 dB
7	2.52 dB	2.75 dB
8	2.52 dB	2.75 dB
9	2.43 dB	2.63 dB
10	2.52 dB	2.74 dB
11	2.71 dB	2.96 dB
12	2.36 dB	2.61 dB
13	2.60 dB	2.65 dB

**Table 2: Job1 Loss1\_Loss2 Fail1 (continued)**

Fiber	1310nm-A-to-Z	1550nm-A-to-Z
2	2.36 dB	2.96 dB
3	2.42 dB	2.82 dB
4	2.56 dB	2.78 dB
5	2.36 dB	2.52 dB
6	2.52 dB	2.75 dB
7	2.52 dB	2.75 dB
8	2.43 dB	2.63 dB
9	2.52 dB	2.74 dB
10	2.71 dB	2.96 dB
11	2.55 dB	2.91 dB
12	2.72 dB	2.79 dB

**Table 3: Contains Reference Data**

Fiber	1310nm-A-to-Z	1310nm-Z-to-A	1270nm-A-to-Z
1	2.83 dB	2.80 dB	2.80 dB
2	2.38 dB	2.59 dB	2.59 dB
3	2.42 dB	2.82 dB	2.82 dB
4	2.50 dB	2.79 dB	2.79 dB
5	2.30 dB	2.52 dB	2.52 dB
6	2.52 dB	2.75 dB	2.75 dB
7	2.52 dB	2.75 dB	2.75 dB
8	2.43 dB	2.63 dB	2.63 dB
9	2.52 dB	2.74 dB	2.74 dB

**Certification Results Window:**

Customer: MANCHESTER UNIV

Calculated: 2010-10-08 10:48:13 AM

Number of Cables: 2

Number of Status: 0

Standard: ISO 11801 (International Standard) all cables, 90 or 62.5 um fiber

Table with columns: Date of Test, Time, Hour, Day, Location, SP, Pass/Fail, Headroom.

© 2012, AF, all rights reserved. OPM5-40-2000 Revision 1C, 2012-07-06  
Specifications are subject to change without notice.

## Test and Inspection

### NOYES® OPM5 Optical Power Meter

#### Specifications \*

OPTICAL	OPM5-2D	OPM5-3D	OPM5-4D
Calibrated Wavelengths	850, 1300, 1310, 1490, 1550 nm	850, 1300, 1310, 1550, 1490, 1625 nm	850, 980, 1300, 1310, 1490, 1550, 1625 nm
Detector Type	Germanium (Ge)	InGaAs	Filtered InGaAs
Measurement Range	+6 to -60 dBm	+10 to -75 dBm	+26 to -50 dBm
Tone Detect Range	+6 to -50 dBm +6 to -45 dBm for 850 nm	+10 to -50 dBm +10 to -45 dBm for 850 nm	+6 to -30 dBm +6 to -25 dBm for 850 nm
Wavelength ID Range	+6 to -50 dBm +6 to -45 dBm for 850 nm	+10 to -50 dBm +10 to -45 dBm for 850 nm	+6 to -30 dBm +6 to -25 dBm for 850 nm
Accuracy <sup>b</sup>	±0.25 dB		
Resolution	0.01 dB		
Measurement Units	dB, dBm, µW		
<b>GENERAL</b>			
Power	2 x AA batteries, accepts standard mini-USB charger		
Adapter Caps	2.5 mm Universal Included for FC, ST, SC Connector specific adapters available		
Battery Life	300 hours		
Operating Temperature	-10 °C to 50 °C, 90 % RH (non-condensing)		
Storage Temperature	-30 °C to 60 °C, 90 % RH (non-condensing)		
Size (H x W x D)	14.0 x 8.1 x 3.8 cm (5.5 x 3.2 x 1.5 in)		
Weight	0.26 kg (0.58 lb)		

#### Notes:

- All specifications valid at 25 °C unless otherwise specified.
- Accuracy measured at 25 °C and -10 dBm per N.I.S.T. standards.

#### Accessories

DESCRIPTION	AFL NO.
FC adapter	8800-00-0200
SC adapter	8800-00-0209
ST® adapter	8800-00-0202
LC adapter	8800-00-0225

\* See [www.AFLglobal.com](http://www.AFLglobal.com) for full list of adapter caps

#### Ordering Information

INCLUDES	AFL NO.
OPM5 optical power meter, 2 x AA batteries, protective rubber boot, USB cable, Windows® compatible software, 2.5 mm Universal Adapter cap and carry case.	All OPM5 models

#### Calibration Plans

AFL recommends annual calibrations on NOYES Test and Inspection products. Prepaid Cal plans offer two annual calibrations at a discounted price, a convenient calibration expiration email service, express calibration services and access to the NOYES product knowledge base. Cal Plus plans offer the same services as the Cal plans with the addition of a two year extended warranty (three years total coverage).

MODEL	2 YR CAL PLAN	2 YR CAL PLUS PLAN
	AFL NO.	AFL NO.
OPM5-2D	CAL2-00-OPM5-2	CAL2-01-OPM5-2
OPM5-3D	CAL2-00-OPM5-3	CAL2-01-OPM5-3
OPM5-4D	CAL2-00-OPM5-4	CAL2-01-OPM5-4



© 2012, AFL, all rights reserved. OPM5-40-2000 Revision 1C, 2012-07-06  
Specifications are subject to change without notice.