

Polycrystalline Mid-InfraRed Fiber

We have developed a volume production technology of a unique product - Core / Clad Polycrystalline Infra-Red (PIR-) fibers transparent over a broad spectral range 3 - 17 μm . Highest performance PIR core/clad fibers are extruded with core diameters span from 240 μm to 860 μm . Continuously improved extrusion process provides a superior optical quality and mechanical strength of PIR-fibers. Low optical losses without absorption peaks over the mentioned spectral range ensure a successful use of PIR-fiber for a broad range of applications.




Applications:


- ✓ Mid IR spectroscopy
- ✓ Flexible IR pyrometry
- ✓ Flexible IR-Imaging systems
- ✓ Power delivery for Quantum Cascade Lasers
- ✓ Power delivery for CO and CO₂ Lasers

Features:

- ✓ High transmittance in 3-17 μm range
- ✓ Low optical losses 0.2 – 0.3 dB/m in 9-13 μm range
- ✓ Core/Clad structure with core diameters span from 240 to 860 μm
- ✓ Minimal aging effect
- ✓ Non-hydroscopic and non-toxic

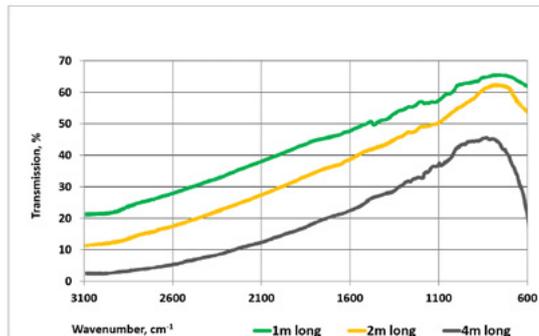

Transmission Spectra of Polycrystalline Fibers of Different Length (Spectral Quality Grade)

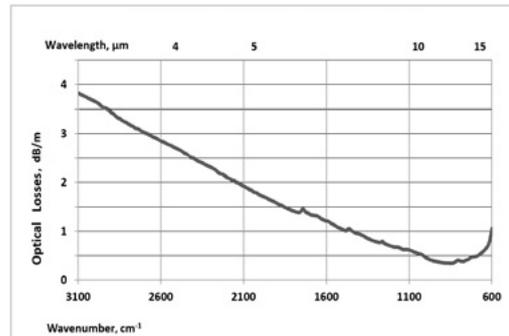


Optical Losses Spectrum of Polycrystalline Fiber



Specifications

Core/Cladding Composition	AgCl : AgBr
Spectral Range	3 - 17 μm
Core Refractive Index	2.15
Fresnel Reflection Losses	25%
Attenuation at 10.6 μm	0.2 - 0.4 dB/m
Effective Numerical Aperture NA	0.30 +/- 0.03
Melting Point	410 °C
Operating Temperature	-273 to +140°C
Core/Clad Diameter (standard)	see table below
Laser Damage Threshold for CW CO ₂ laser	>12 kW/cm ²
Tensile Strength	> 70 MPa
Minimum Bending Radius (fixed)	5 [Fiber Diameter]
Minimum Elastic Bending Radius	150 [Fiber Diameter]

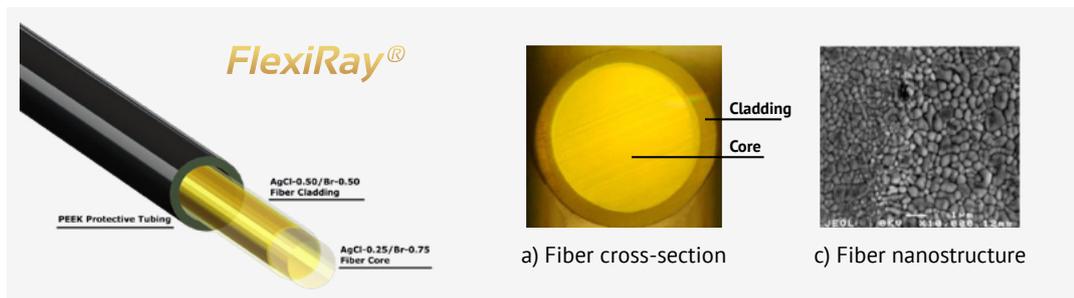

Parameters of standard Polycrystalline fibers

Code	Type	Core, μm	Cladding, μm	Protective Jacket, μm	NA**	Min. bending Radius, mm
PIR240/300	Step Index Multimode	240±15	300+0/-15	no	0.30±0.03	45
PIR400/500	Step Index Multimode	410±15	500+0/-15	no	0.30±0.03	75
PIR600/700	Step Index Multimode	600±20	700+0/-15	no	0.30±0.03	100
PIR900/1000	Step Index Multimode	860±20	1000+0/-25	no	0.30±0.03	150

** effective value