

LCU80C051Ap/Dp/Gp

LCU80xx SERIES LASER DIODE



■ Features

1. Low operation current
2. High reliability
3. Low divergence angle
4. Standard optical power output : 300mW (CW)
5. TO-56 (ϕ 5.6mm) Packaged, with Pb-free window cap.

■ Applications

1. Motion sensor
2. Medical application
3. Pumping source for solid state laser
4. Infrared illumination
5. Industrial application

■ External dimensions(Unit : mm)

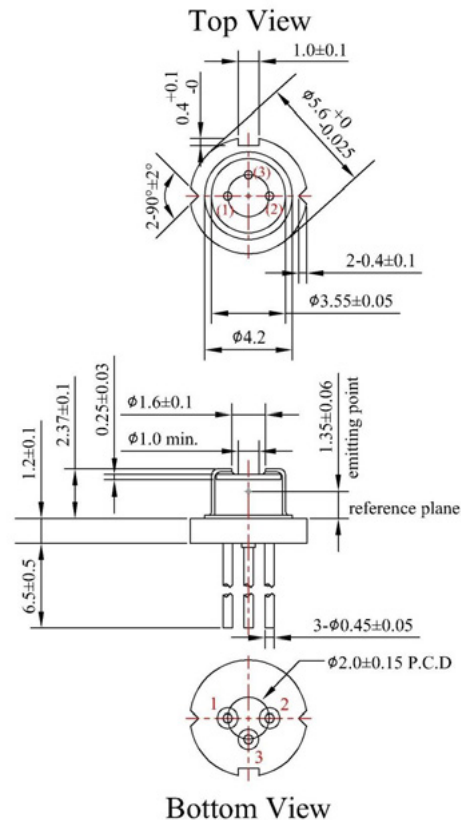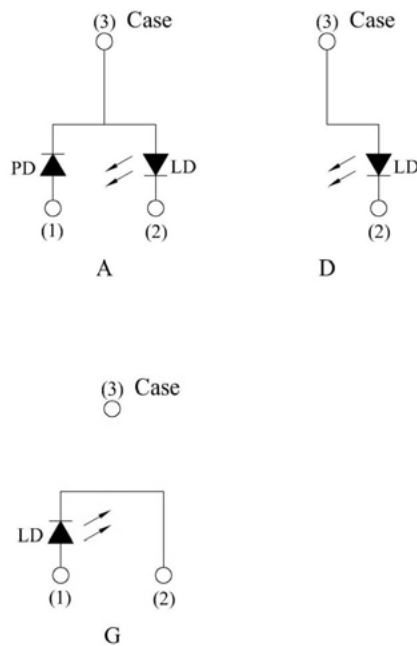

■ Absolute Maximum Ratings(Tc=25°C)

Ver.C

LCU80C051Ap/Dp/Gp

LCU80xx SERIES LASER DIODE

Parameter	Symbol	Rating	Unit
Optical Output	Po	330	mW
Reverse Voltage	Vr	2	V
Operating Temperature (Case)	Top	-10~+50	°C
Storage Temperature	Tstg	-40~+85	°C

■ Electrical and Optical Characteristics(Tc=25°C)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Threshold Current	Ith	Po=300mW	-	60	-	mA
Operating Current	Iop	Po=300mW	-	330	350	mA
Operating Voltage	Vop	Po=300mW	-	1.9	2.1	Volts
Slope Efficiency	η	Po=75-225mW	0.95	1.1	-	mW/mA
Monitir current	Im	Po=300mW	-	0.6	2.0	mA
Beam Divergence (FWHM)	Parallel	$\theta_{//}$	Po=300mW	-	7	deg.
	Perpendicular	$\theta_{\perp}$	Po=300mW	-	28	deg.
Lasing Wavelength	λ	Po=300mW	805	808	811	nm

◎ $\theta_{//}$ and $\theta_{\perp}$ are defined as the angle within which the intensity is 50% of the peak value.

■ Quality Notice

This device is still under product development.

■ Typical characteristic curves

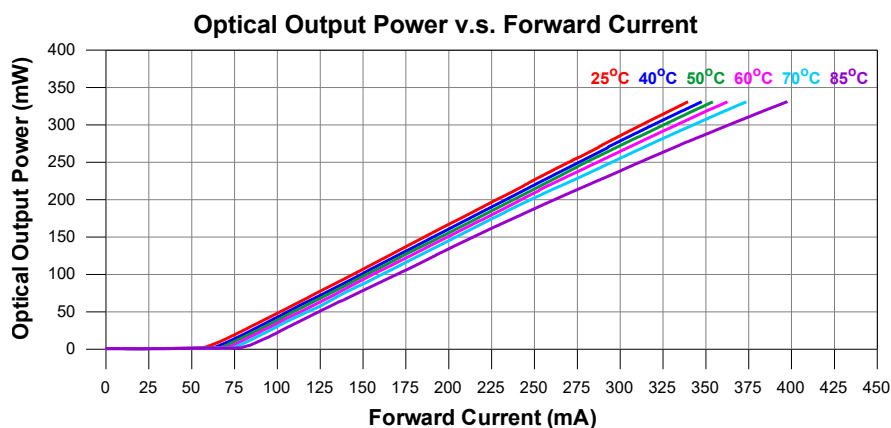


Ver.C


LCU80C051Ap/Dp/Gp

LCU80xx SERIES LASER DIODE


Forward Voltage v.s. Forward Current

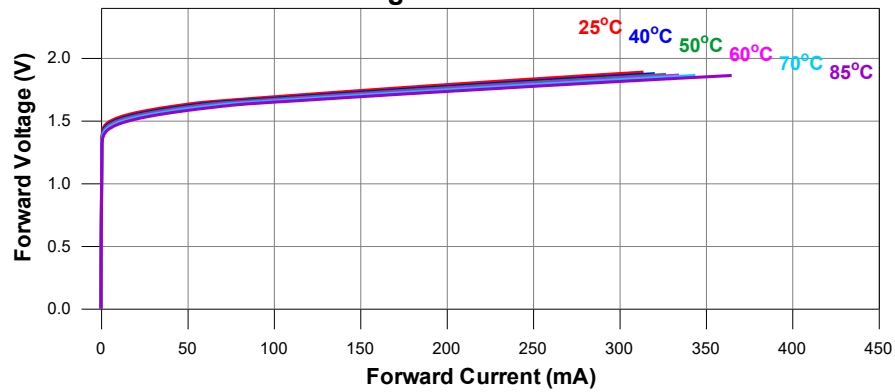

Peak Wavelength v.s. Case Temperature

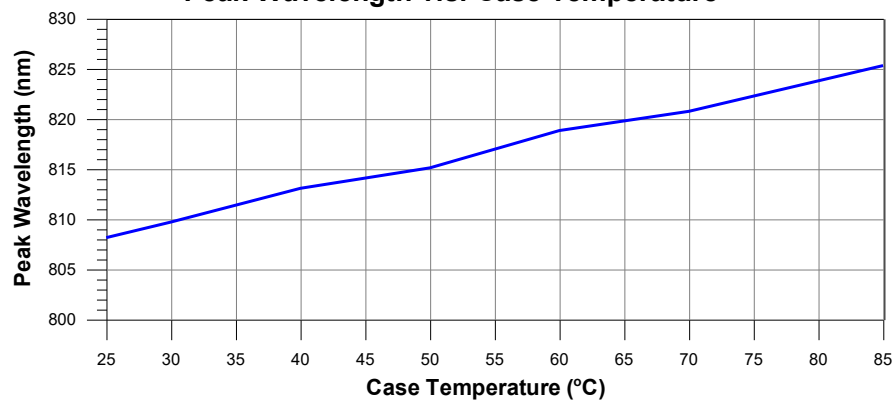

Far-Field Pattern

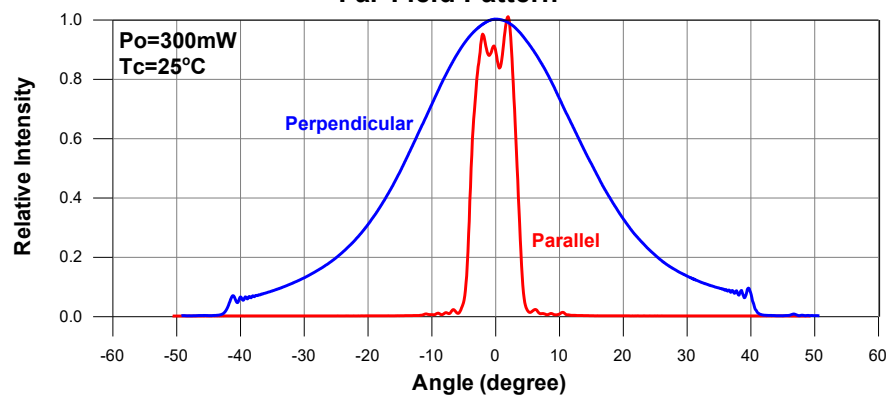


Ver.C


LCU80C051Ap/Dp/Gp

LCU80xx SERIES LASER DIODE


Monitor Current v.s. Optical Output Power

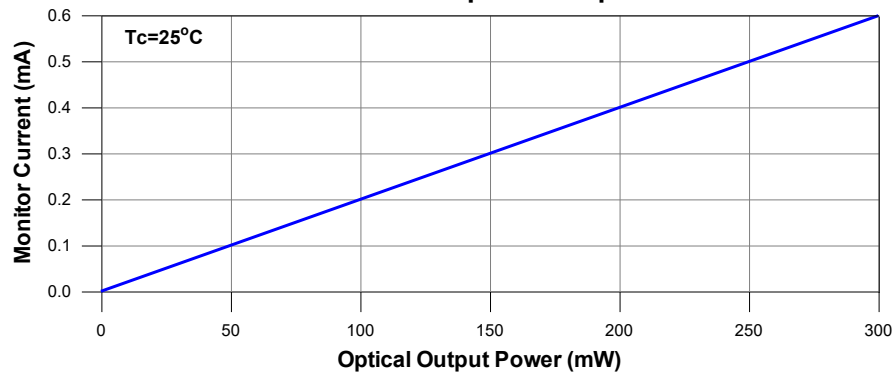

Slope Efficiency v.s. Case Temperature

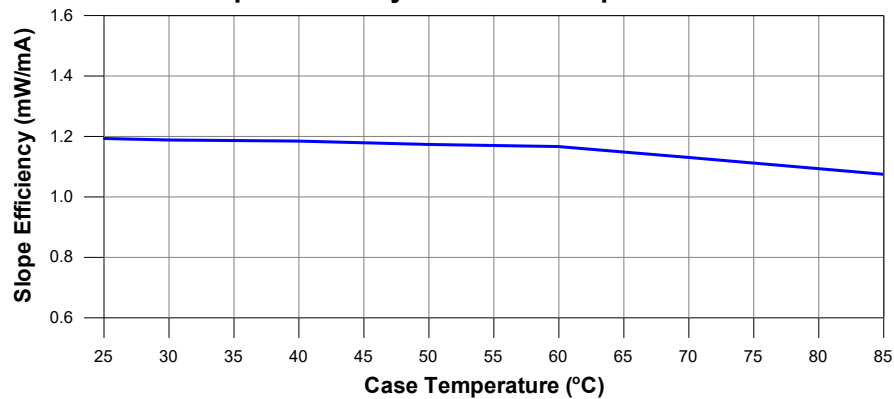

Threshold Current v.s. Case Temperature

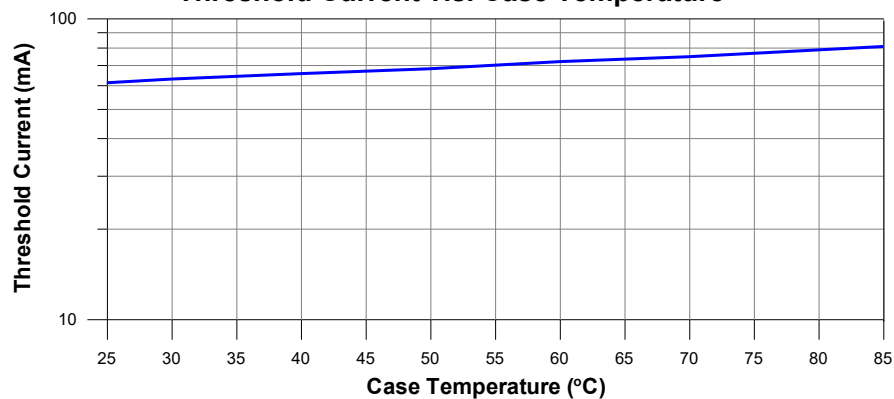

Ver.C

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.