



Laser Engine

High Power Multi-Mode SemiNex Laser
2 Watts of CW Power
1460, 1480, 1565, 1575 Wavelengths
Custom Wavelengths Available
Low Cost Packaging


Features

- Lost Cost High Volume Assembly
- "P" and "Q" Packages Available
- High Efficiency
- High Output Power

Applications

- Medical laser equipment
- Home laser applications
- Low cost sensors
- Range finding

SemiNex delivers the highest available power at infrared wavelengths between 13xx and 17xx nm. When necessary we will further optimize the design of our InP laser chips to meet our customers' specific optical and electrical performance needs. Diodes, bars and packages are tested to meet customer and market performance demands. Typical results and packaging options are shown. Contact SemiNex for additional details or to discuss your specific requirements

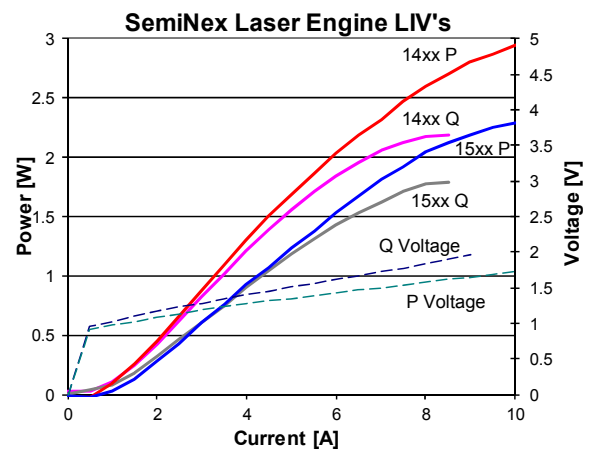

701-920-005 Rev. 2



Laser Engine Q

	Symbol	LEQ-111	LEQ-102	LEQ-108	LEQ-103	LEQ-106	Units
Optical							
Center Wavelength	λ_c	1460	1470	1480	1565	1575	nm
Output power (CW)	P_o	1.8	2.5	2	1.5	1.5	W
Spectral Width	$\Delta\lambda$	10	10	10	10	10	nm 3dB
X Axis Divergence*	θ_X	9	9	9	9	9	deg FWHM
Y Axis Divergence*	θ_Y	<6	<6	<6	<6	<6	deg FWHM
Electrical							
Power conversion Eff.	η	0.17	0.15	0.15	0.15	0.15	W/W
Threshold Current	I_{th}	0.7	0.5	0.5	0.5	0.5	A
Operating Current	I_{op}	7	7	7	6.5	6.5	A
Operating Voltage	V_{op}	1.7	1.7	1.7	1.5	1.5	V
Series Resistance	R_s	0.1	0.1	0.1	0.1	0.1	ohm
Fan							
Voltage (DC)	VDC	5	5	5	5	5	VDC
Power	watts	0.4	0.4	0.4	0.4	0.4	W
Air Flow	CFM	3	3	3	3	3	CFM
Mechanical							
Weight				17.4			g
Operating Temp.				10 to 30			°C
Storage Temp.				-20 to 80			°C

* Divergence is dependent on lens used it is customized to meet customer requirements.
Specified values are rated at a constant heat sink temperature of 20°C

Optional



PN LE Tube-101

Laser Engine Air Flow Tube

701-920-005 Rev. 2



Laser Engine P


	Symbol	LEP-112	LEP-103	LEP-102	LEP-101	Units
Optical						
Center Wavelength	λ_c	1465	1475	1570	1580	nm
Output power (CW)	P_o	2.6	2.6	2	2	W
Spectral Width	$\Delta\lambda$	10	10	10	10	nm 3dB
X Axis Divergence*	θ_X	9	9	9	9	deg FWHM
Y Axis Divergence*	θ_Y	<6	<6	<6	<6	deg FWHM
Electrical						
Power conversion Eff.	η	0.19	0.19	0.15	0.15	W/W
Threshold Current	I_{th}	0.5	0.5	0.5	0.5	A
Operating Current	I_{op}	8	8	7.5	7.5	A
Operating Voltage	V_{op}	1.5	1.5	1.5	1.5	V
Series Resistance	R_s	0.05	0.05	0.05	0.05	ohm
Mechanical						
Weight				25.5		g
Operating Temp.				10 to 30		°C
Storage Temp.				-20 to 80		°C

* Divergence is dependent on lens used it is customized to meet customer requirements.


Specified values are rated at a constant heat sink temperature of 20°C

701-920-005 Rev. 2

Laser Engine Q & P

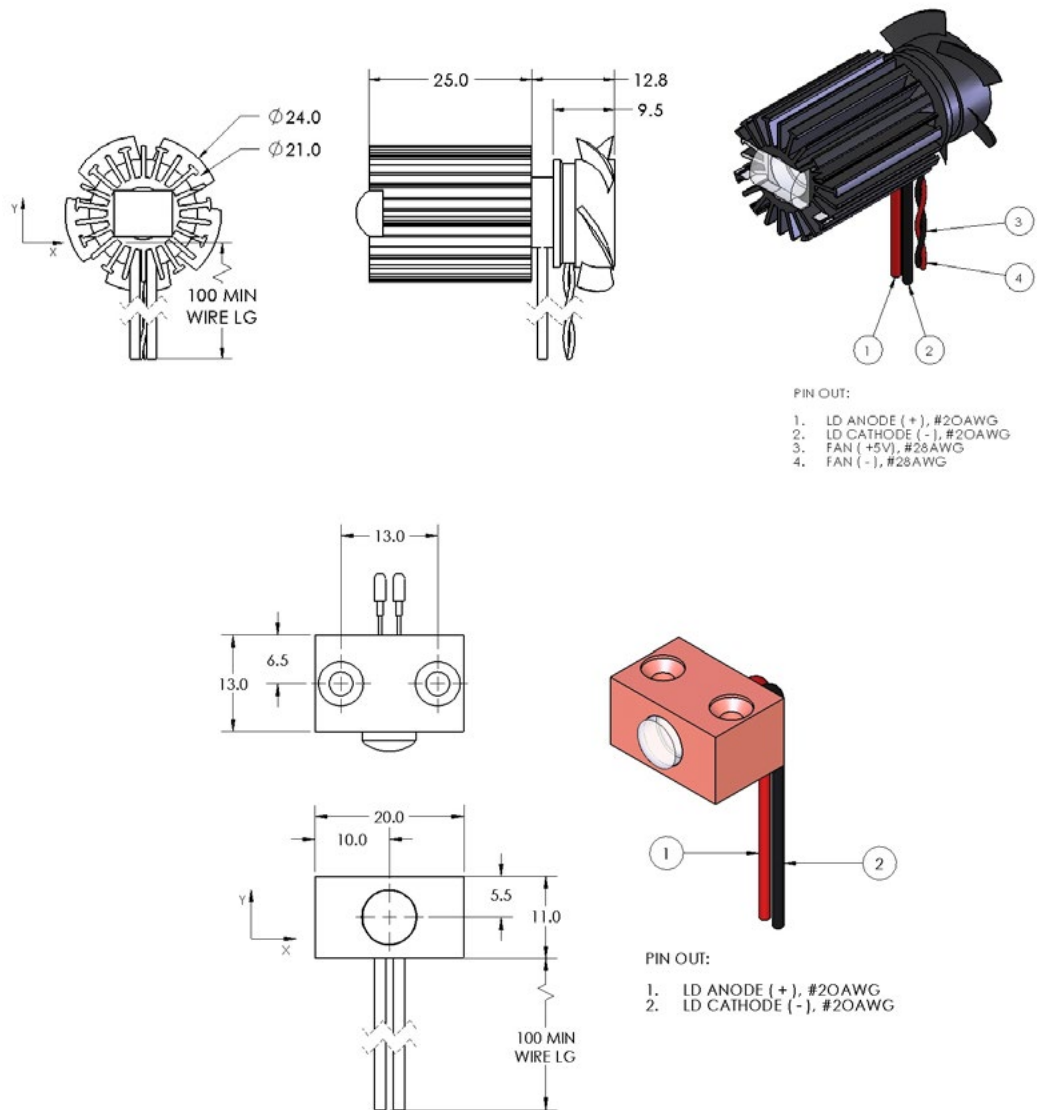

All statements, technical information and recommendations related to the product herein are based upon information believed to be reliable or accurate. The accuracy or completeness herein is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. SemiNex Corporation reserves the right to change at any time without notice the design, specification, deduction, fit or form of its described herein, including withdrawal at any time of a product offered for sale herein. Users are encouraged to visit www.seminex.com for the latest data. SemiNex Corporation makes no representations that the products herein are free from any intellectual property claims of others. Please contact SemiNex for more information. © 2014 SemiNex Corporation



701-920-005 Rev. 2