



FIBER-Q®

1060 nm Fiber Coupled Acousto-Optic Modulator

T-M200-0.1C2G-3-F2S

The Fiber-Q® acousto-optic modulator is designed for use in pulsed fiber laser amplifier systems and as a pulse picker for short pulse, high rep rate fiber lasers.

G&H specialize in providing optical components for high power fiber laser and amplifier systems. In-house control of critical manufacturing processes; from crystalline material selection and orientation, cutting, polishing and anti-reflection coating through to fiber coupling, ensure our components are of the highest optical quality.

In addition to the standard product shown, custom configurations are available for specialized applications.



Key Features

- Low insertion loss
- Compact low profile package
- Rugged hermetic design
- Stable performance
- Custom configurations available

Applications

- Fiber laser
- Pulse picker
- Optical sensing

1060 NM FIBER-COUPLED ACOUSTO-OPTIC MODULATOR

PEC 0157 Issue 9

As part of our policy of continuous product improvement, we reserve the right to change specifications at any time.



July 2024

Page 1



General Specifications

Parameter	Min	Max	Typical	Comments
Interaction material	-	-	-	Tellurium dioxide
Wavelength	-	-	1060 nm	Other wavelengths available on request
Average optical power handling	-	1 W	-	
Peak optical power handling	-	1 kW	-	Dependent on pulse width
Insertion loss	-	4 dB	3.5 dB	
Polarisation dependant loss	-	0.5 dB	0.2 dB	
Extinction ratio	45 dB	-	-	
Return loss (RF ON/RF OFF)	40 dB	-	-	
Rise-time/fall-time: (10% - 90%)	-	10 ns	-	Does not include RF Driver rise / fall time
Frequency	-	-	200 MHz	
VSWR	-	1.5:1	-	
Input impedance	-	-	50 Ω	
RF power	-	2.5 W	-	Absolute maximum rating. Higher power will cause damage.
Frequency shift	-	-	200 MHz	Upshift
Fiber type	-	-	-	HI1060
Fiber length	1.5 m	-	-	900 μ m PVDF sleeving
Fiber termination	-	-	-	Bare fiber


1060 NM FIBER-COUPLED ACOUSTO-OPTIC MODULATOR

PEC 0157 Issue 9

As part of our policy of continuous product improvement, we reserve the right to change specifications at any time.

July 2024

Page 2

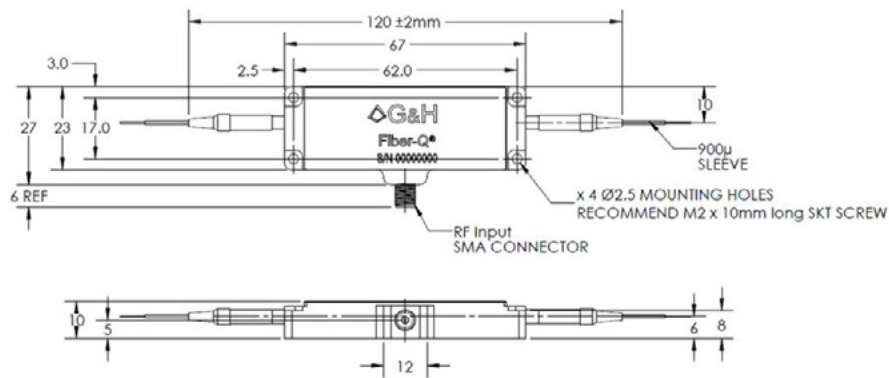

Other products which may be of interest

- HI REL couplers
- High power multimode combiners
- Combiners with all types of signal feedthrough fiber
- Ultra-low ratio tap couplers
- WDMs for combining signals with red pointer lasers
- OCT wideband couplers

1060 NM FIBER-COUPLED ACOUSTO-OPTIC MODULATOR

PEC 0157 Issue 9

As part of our policy of continuous product improvement, we reserve the right to change specifications at any time.

July 2024

Page 3