


INFRA**SOLID**®

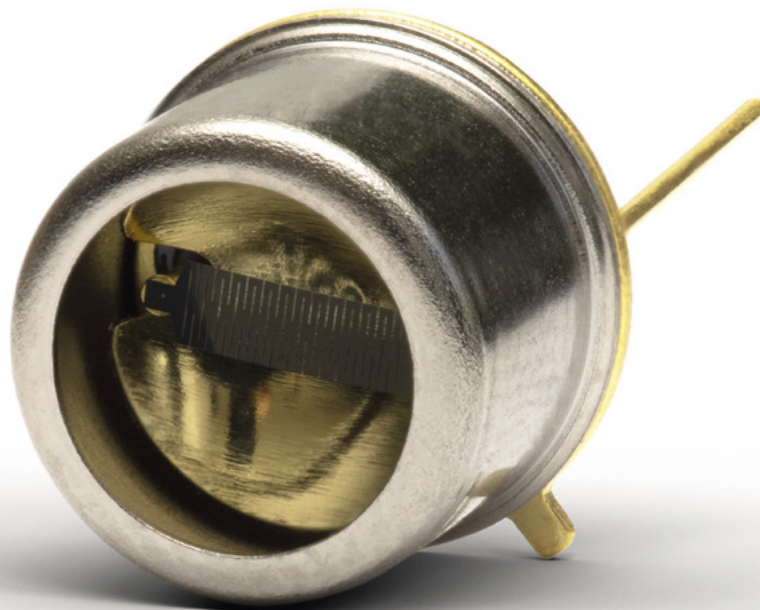

Data Sheet *HISbasic*

HIS550R-0

TO-39/TO-5 Thermal Infrared Emitter


HIS550R-0

Thermal infrared emitter with gold plated reflector


Our HIS550R-0 is a NiCr filament based thermal emitter in a TO39 package, with a gold plated reflector that directs the radiation emitted from the rear of the filament to the front. This almost doubles our optical output power. The open emitter offers high performance for a wide spectral measuring range.

HISbasic series emitters have an integrated gold plated reflector that directs the radiation emitted from the rear to the front in order to achieve maximum efficiency. All our emitters offer minimum drift at constant resistance. Infrasil IR emitters are characterized by a very low temperature coefficient of electrical resistance. Therefore the hot resistance and the cold resistance are almost identical which eases the electrical control of the IR sources.

Key features



**High radiant
power**



**High
efficiency**



**Cost
effective**



- ✓ Pulsable thermal black-body infrared source mounted in an industry standard TO-39/TO-5 package.
- ✓ Patented nanostructured radiating element achieves up to 500% more detection signal!
- ✓ Lower radiating element temperature of 600 °C increases lifetime!
- ✓ Wide wavelength range enables a broad range of applications.




*innovative infrared sources for
gas detection & spectroscopy*

Main specifications

Parameter	HIS550R-0
Package	TO-39 / TO-5
Radiating element area	11 mm ²
Radiating element emissivity	> 0.9
Radiating element temperature	600 °C at 650 mW
Optical output power	up to 195 mW
Max. electrical power (DC)	700 mW
Max. electrical voltage	4.0 V
Max. electrical current	175 mA
Electrical cold resistance	22 +/- 3 Ω (typ. 21...23 Ω)
Electrical hot resistance	22 +/- 3 Ω (typ. 21...23 Ω)
Filter/Window	None
Wavelength range	2 to 20 μm
Filling gas	None

Optical specifications

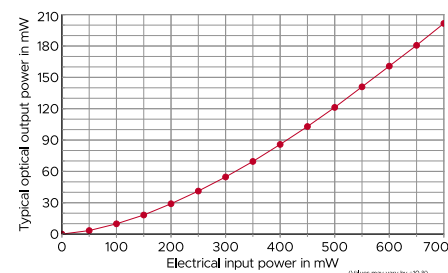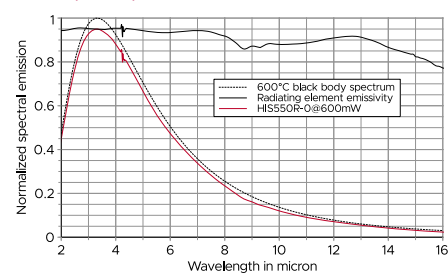


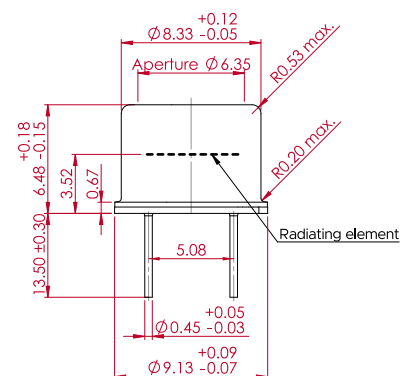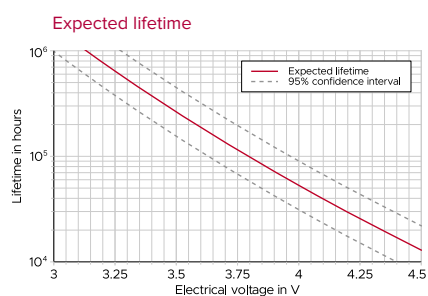

HIS550R-0 @700 mW	Operation mode	
	DC	Pulsed (1 Hz square wave)
T _{amb}	80 °C	55 °C


- ⊗ **JESD22-A104**
(temperature cycling and shock test: -45 °C / + 90 °C, 100 cycles)
- ⊗ **JESD22-B103**
(vibration test: log. sweep 20 Hz...2000 Hz, peak 20 g, X/Y/Z direction)
- ⊗ **JESD22-B110**
(drop test: 5000 m/s², 6 directions)

Angular radiation distribution

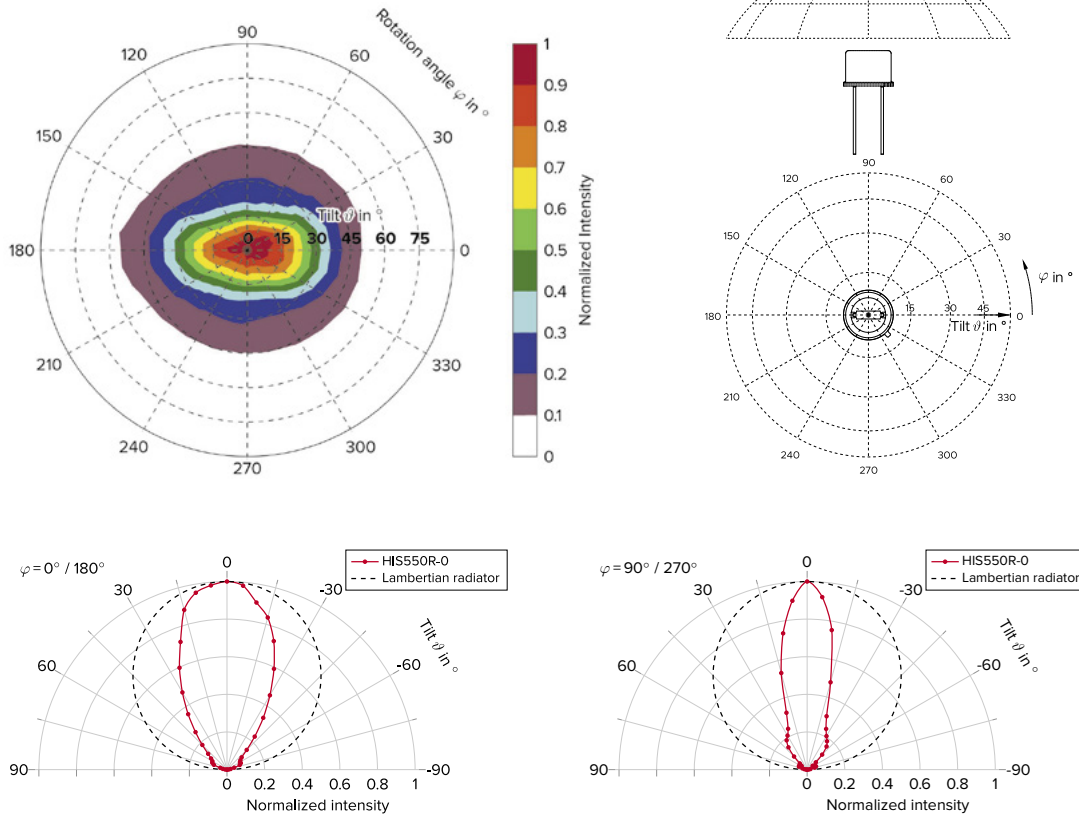

Driver Circuit Board (DCB):

We provide several Driver Circuit Boards (DCBs) for our HIS sm d, HIS $basic$ and HIS $power$ series emitters to support a quick evaluation in your applications. All DCBs are small and use a low-cost driving circuit with a maximum stability close to a power regulated mode. Only a supply voltage and a pulse signal have to be applied. For more information about its function, see our technical notes.

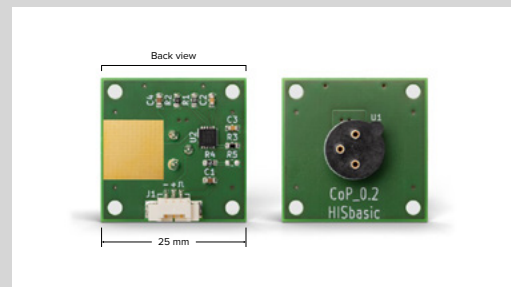

INFRASOLID®

HIS550R-0 EN
250512