FP-MS-11-5

Standard Mount for Laser Modules with 11.5 mm Diameter

This mount can be used for all laser modules with 11.5 mm diameter and a cylindrical housing for easy integration and incorporation. The best position for the mount to ensure heat dissipation is indicated in the drawing of the applied module or the FLEXPOINT® manual. This mount is suitable for the following laser modules: MVnano, Line, Dot and DOE FLEXPOINT® laser modules.

FEATURES

/ Standard mount for FLEXPOINT® laser modules with 11.5 mm diameter
/ Made of aluminium, anodised in black
/ The module can be moved up and down within the mount as indicated by the red arrow so that the angle of the beam exit in relation to the mounting surface can be adjusted

TECHNICAL DRAWING

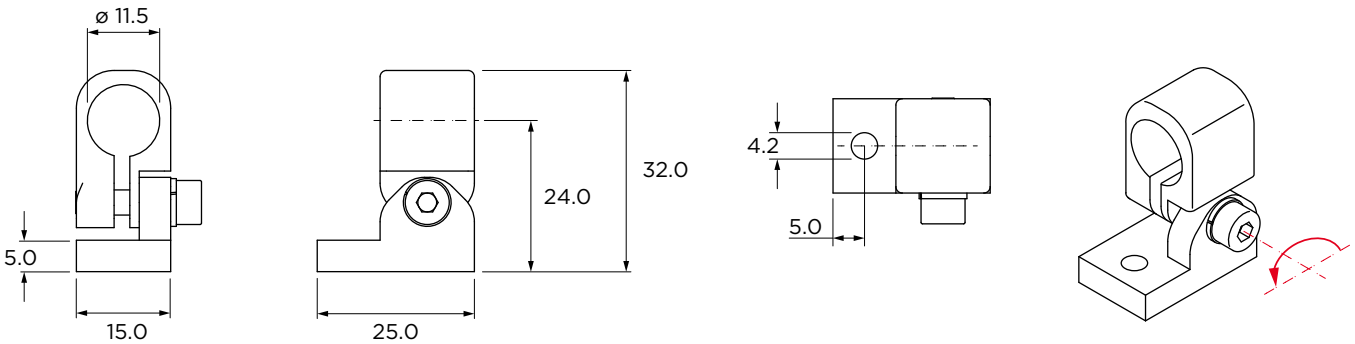

FP-MS-11.5 Mount

Units: mm

/ Germany and Other Countries LASER COMPONENTS Germany GmbH Tel +49 8142 2864 – 0 info@lasercomponents.com www.lasercomponents.com
/ France LASER COMPONENTS S.A.S. Tel +33 1 39 59 52 25 info@lasercomponents.fr www.lasercomponents.fr
/ United Kingdom LASER COMPONENTS (UK) Ltd. Tel +44 1245 491 499 info@lasercomponents.co.uk www.lasercomponents.co.uk
/ Nordic Countries LASER COMPONENTS Nordic AB Tel +46 31 703 71 73 info@lasercomponents.se www.lasercomponents.se
/ USA LASER COMPONENTS USA, Inc. Tel +1 603 821 – 7040 info@laser-components.com www.laser-components.com

beyond borders

03/25 / V5 / KS-MaL / laser-modules/fp-ms-11-5-laser-module-mount