

FP-PS-12V


Power Supply



POWER SUPPLY WITH DC FEMALE CONNECTOR FOR 12 V SUPPLY


This plug can be used to connect any laser module with open leads to a power grid with 100–240 V supplying the laser with 12 V. The package contains the plug with 1.8 m cable and a female DC connector as well as the related male connector. The FP-PS-12V can for example be used for MVnano and MVPico with open leads.

SPECIFICATIONS

Rated input voltage [V]	100–240
Rated input frequency [Hz]	50/60
Rated input current [A]	0.25
Max. input power [W]	12
Output voltage [V]	12
Output current [mA]	1000 max.
Wire length [mm]	1800
Polarity	
Operating temperature [°C]	0 up to +40
Storage temperature [°C]	-20 up to +80

Male Connector included in delivery

TECHNICAL DRAWING

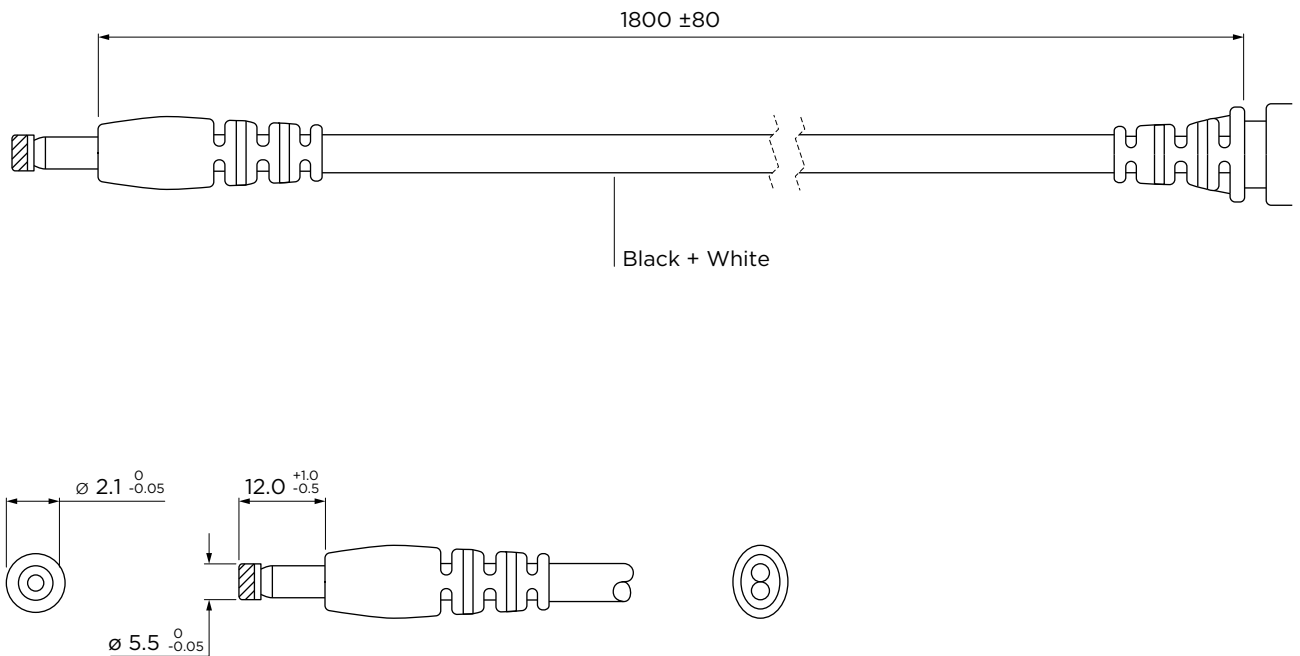

DC Female Connector

Units: mm