


GAUSSIAN MIRRORS

Laser Optics

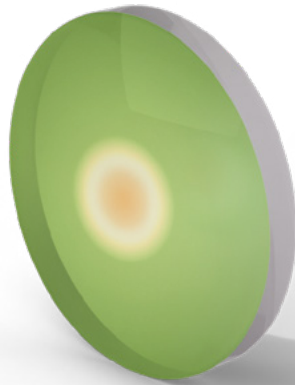

PERFECT GAUSSIAN SHAPE FOR HIGH POWER LASER BEAMS

Gaussian mirrors, also known as VRM (variable reflecting mirrors), are characterized by a degree of reflection that slopes from the center of the optic in a Gaussian distribution. LASER COMPONENTS is one of the few manufacturers worldwide that offers this special type of mirror.

The mirrors are used in unstable resonators where they help produce high quality laser beams with low beam divergence at high pulse energies. In frequency-doubled systems they are used to achieve a greater pump efficiency. The Gaussian mirrors are extremely stable and therefore suited for the highest power levels.

FEATURES

- / Improved laser beam quality with high beam intensity
- / High LIDT approved coatings
- / Plane or convex substrates Ø 6–100 mm
- / Available for different wavelengths, mainly 1064 nm

APPLICATIONS

- / Unstable resonators
- / Frequency doubling Nd:YAG lasers
- / Medical laser sources
- / High power range finding/LiDAR systems

/ **Germany and Other Countries** LASER COMPONENTS Germany GmbH Tel +49 8142 2864-0 info@lasercomponents.com www.lasercomponents.com
/ **France** LASER COMPONENTS S.A.S. Tel +33 1 39 59 52 25 info@lasercomponents.fr www.lasercomponents.fr
/ **United Kingdom** LASER COMPONENTS (UK) Ltd. Tel +44 1245 491 499 info@lasercomponents.co.uk www.lasercomponents.co.uk
/ **Nordic Countries** LASER COMPONENTS Nordic AB Tel +46 31 703 71 73 info@lasercomponents.se www.lasercomponents.se
/ **USA** LASER COMPONENTS USA, Inc. Tel +1 603 821-7040 info@laser-components.com www.laser-components.com

SPECIFICATIONS

Assembly

The working principle of Gaussian mirrors is based on a Fabry P rot interferometer with a position-dependent mirror spacing – a so-called etalon.


The adjoining picture shows the cross-section of a coating that exhibits a change in the reflection $R(r)$ for monochromatic light depending on its position.

A so-called distance layer S with varying thickness d is surrounded by two identical mirror layers M . If d is an even multiple of $\lambda/4$, the system is transparent for the wavelength and does not exhibit a reflection for λ . If d is an odd multiple of $\lambda/4$, the total reflection is determined by the reflection of the mirror layers M .


Measurement

The gaussian optics are manufactured with extreme precision according to customer specifications, they are characterized and measured in a very detailed manner. Using an innovative measuring system leads to a consistently high quality of the optics and strict adherence to the desired specifications of the customer.

Detailed measurement diagrams are available for all Gaussian optics.

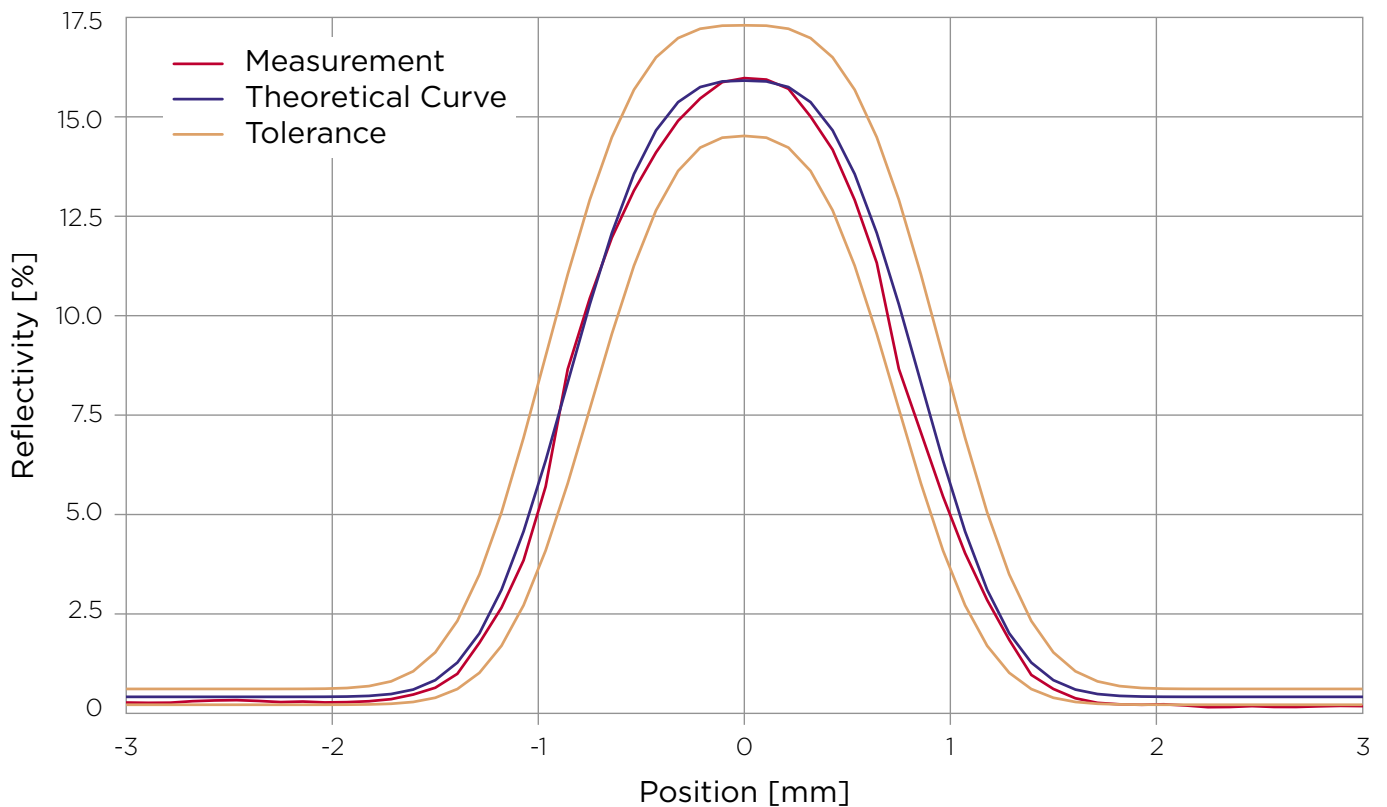


Example for a Gaussian Mirror: The coating will be manufactured within the shown tolerances of the calculated theoretical curve. The red curve shows a real measurement of a final product.

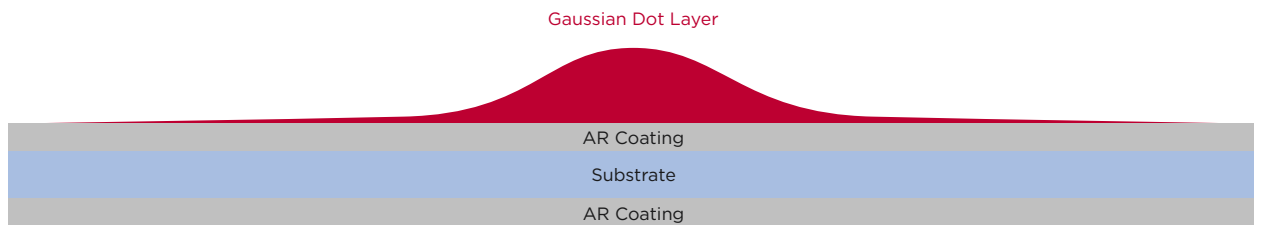

Schematic structure of a Gaussian mirror (not to scale)

TECHNICAL DRAWING

Typical Gaussian Mirror (schematic drawing)

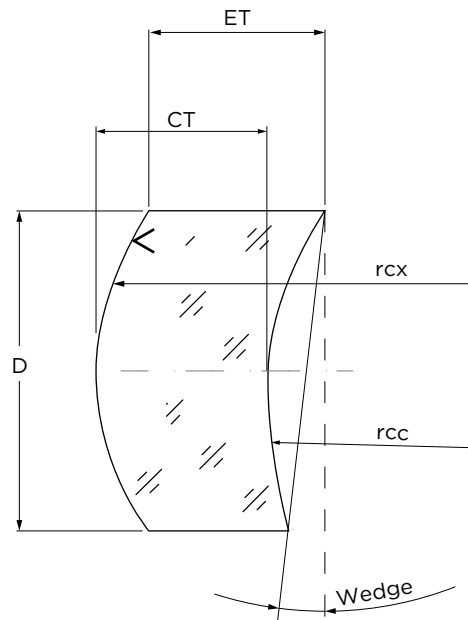

SIDE VIEW

ORDERING CODE

	Wavelength λ [nm]	Reflectivity R_0 [%]	Radius $1/e^2$ w [mm]	Order n	CX-D [mm]	RCC* [mm]	RCX* [mm]	Material	Wedge w [°]
GR	X	X	X	X	X	X	X	X	X
	800-1064	4-40	0,8-4,0	2-6	6-30			UV, C	1-3

Foot Note / Abbreviations

 R_0 = Reflectivity in center area * = In case RCC is equal to RCX, only one value is specified**When requesting a quotation, the following information is required:**

To determine the Gaussian profile you have to use the following formula:

$$R(r) = R_0 \cdot \exp \left[-2 \left(\frac{r}{w} \right)^n \right] + R_{out}$$

Reflection values R_0 , R_{out}

Two important parameters are the reflection values in the outer and central zone. All coatings where $R_0 > R_{out}$ are defined as Gaussian mirrors; this contains the so-called Super Gaussian Mirrors with a Gaussian order greater than 2. It is often assumed that $R_{out} = 0$; however, other values can be specified. For reflection in the central zone, it is possible to specify values up to 90%.

Lateral dimension w

The lateral dimension w is half the diameter of the spot and is defined by the position $1/e^2$.

Gaussian order n

The Gaussian order n is the exponent of the Gaussian function. With it, the slope and shape can be determined.

Working wavelength λ

Dielectric coatings with a defined reflection function $R(r)$ are generally monochromatic. The Gaussian profile is only valid for a single specified wavelength. LASER COMPONENTS has Gaussian mirrors for 1064 nm available on a standard basis. Additional wavelengths can be manufactured upon request.

Laser beam parameters

For cw lasers: laser power density in W/cm^2 . For pulsed lasers: energy density in J/cm^2 and pulse length as well as repetition rate.

ORDERING INFORMATION

Products can be ordered directly from LASER COMPONENTS or its representatives. For a complete listing of representatives, visit our website at www.lasercomponents.com

Custom designed products are available on request.

/ Germany and Other Countries LASER COMPONENTS Germany GmbH Tel +49 8142 2864-0 info@lasercomponents.com www.lasercomponents.com
 / France LASER COMPONENTS S.A.S. Tel +33 1 39 59 52 25 info@lasercomponents.fr www.lasercomponents.fr
 / United Kingdom LASER COMPONENTS (UK) Ltd. Tel +44 1245 491 499 info@lasercomponents.co.uk www.lasercomponents.co.uk
 / Nordic Countries LASER COMPONENTS Nordic AB Tel +46 31 703 71 73 info@lasercomponents.se www.lasercomponents.se
 / USA LASER COMPONENTS USA, Inc. Tel +1 603 821-7040 info@laser-components.com www.laser-components.com