

IR DETECTOR CARD LDT-1064N




SPECTRAL RANGE 800 – 1700 nm

The new IL Detector Card LDT-1064N is the right tool to convert mid power IR radiation into visible light. It is used in laboratories, in production or as a service tool to detect and align invisible IR lasers.

The emission is based on "photon up conversion" effects. The card is suitable for cw and pulsed lasers. With an active size of 50.8 mm x 50.8 mm it can even detect lasers with larger beam diameters. The new Detector Card does not require UV light activation or moving inside the laser beam.

SPECIFICATIONS

Model	LDT-1064N
Excitation range [nm]	800 – 1700
Emission [nm]	green (approx. 530)
Size of the screen [mm]	88.9 x 50.8
Active size [mm]	50.8 x 50.8
Minimum intensity (estimated)	<10 mW/cm ² (1064 nm, cw) <1 mJ/cm ² (1064 nm/pulsed)
Maximum intensity (estimated)	>100 W/cm ² (1064 nm, cw) >20 J/cm ² (1064 nm, pulsed)

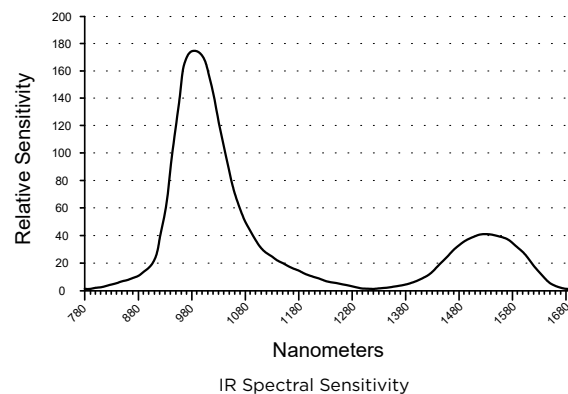

/ Germany and Other Countries LASER COMPONENTS Germany GmbH Tel +49 8142 2864-0 info@lasercomponents.com www.lasercomponents.com
 / France LASER COMPONENTS S.A.S. Tel +33 1 39 59 52 25 info@lasercomponents.fr www.lasercomponents.fr
 / United Kingdom LASER COMPONENTS (UK) Ltd. Tel +44 1245 491 499 info@lasercomponents.co.uk www.lasercomponents.co.uk
 / Nordic Countries LASER COMPONENTS Nordic AB Tel +46 31 703 71 73 info@lasercomponents.se www.lasercomponents.se
 / USA LASER COMPONENTS USA, Inc. Tel +1 603 821-7040 info@laser-components.com www.laser-components.com