


LASER SAFETY WINDOWS - Technical specifications



708.000.XXX HZ

Filter	Full protection
Colour	Clear
Material	Polycarbonate
Thickness	5.0 mm
VLT	90%
Aiming beam wavelength T%(λ) >10%	400-780 nm

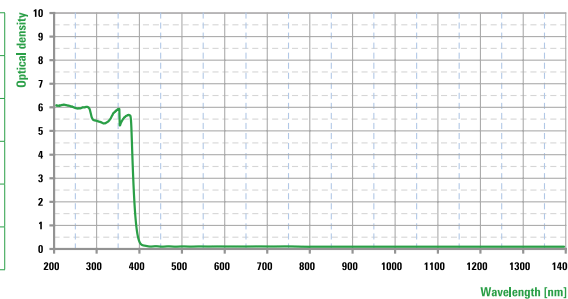

Wavelength	OD	EN207
190	315	5
		D LB5 IR LB3
10600	6	DI LB4

Wavelength	OD	EN12254
9000	11000	6
		DI AB4

3ET632/708HZ Rev. 04/21