

QLF073A/QLF073D

785 nm FP LASER TO-CAN

C00066-07 April 2017



1. DESCRIPTION

The QLF073A/QLF073D are 785 nm quantum well laser devices designed for high output power application. The laser diode is mounted into a TO-56 header including a monitor PD and hermetic sealed with a flat glass cap.

2. FEATURES

- 785 nm FP-LD
- Φ 5.6mm TO-CAN package
- High output power and high slope efficiency
- Including monitor PD
- Two types of pin assignments: anode common type (QLF073A)/cathode common type (QLF073D)

3. APPLICATIONS

- Particle inspections
- Measuring instruments

4. ABSOLUTE MAXIMUM RATING

(CW operation, $T_c = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATING	UNIT
Optical output power	$P_o(\text{CW})$	120	mW
	$P_o(\text{Pulse})$ *	280	mW
LD reverse voltage	V_{RLD}	2	V
PD reverse voltage	V_{RPD}	30	V
Operation temperature	T_c	-10 to 70	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 to 85	$^\circ\text{C}$

*note : Pulse width < 50nsec, Duty < 50%







QLF073A/QLF073D

C00066-07

5. OPTICAL AND ELECTRICAL CHARACTERISTICS






($T_c = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Threshold current	I_{th}	CW	-	35	55	mA
Operation current	I_{op}	CW, $P_o=100\text{ mW}$	-	135	190	mA
Operation voltage	V_{op}	CW, $P_o=100\text{ mW}$	-	2.3	2.8	V
Slope efficiency	H	CW, $P_o=5 - 100\text{ mW}$	0.8	1.0	-	W/A
Monitor current	I_m	CW, $P_o=100\text{ mW}$, $V_{RD}=5\text{ V}$	50	190	600	μA
Peak wavelength	λ_p	CW, $P_o=100\text{ mW}$	775	783	795	nm
Beam divergence horizontal	θ_h	CW, $P_o=100\text{ mW}$ (FWHM)	6	9	12	deg.
Beam divergence vertical	θ_v	CW, $P_o=100\text{ mW}$ (FWHM)	13	16	19	deg.
Beam angle Horizontal	$\Delta\theta_h$	CW, $P_o=100\text{ mW}$	-3	-	3	deg.
Beam angle vertical	$\Delta\theta_v$	CW, $P_o=100\text{ mW}$	-3	-	3	deg.



QLF073A/QLF073D


C00066-07

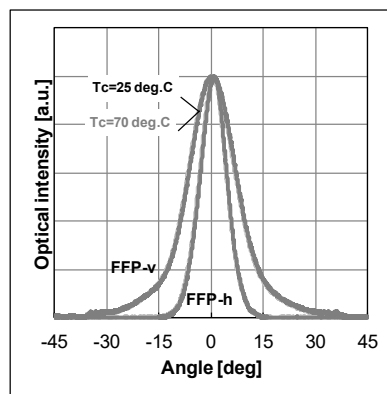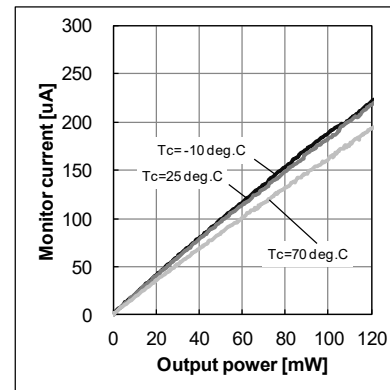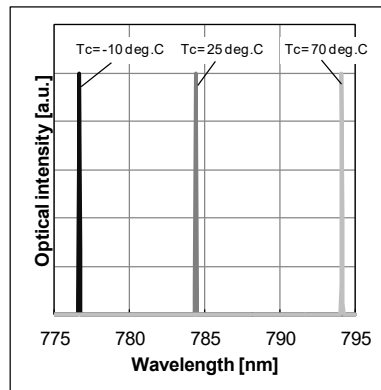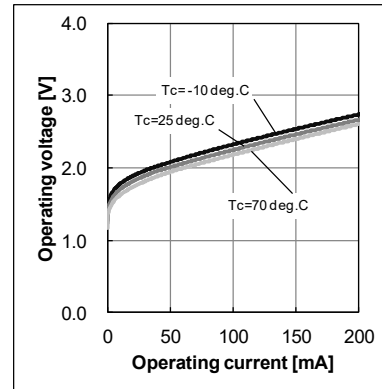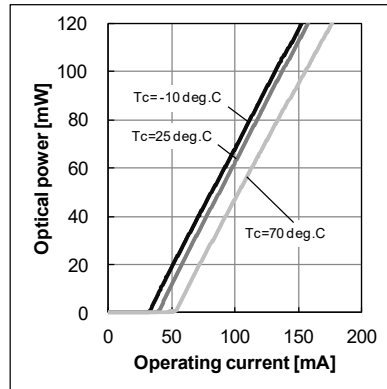

QLF073A/QLF073D

C00066-07

6. Outline Drawing

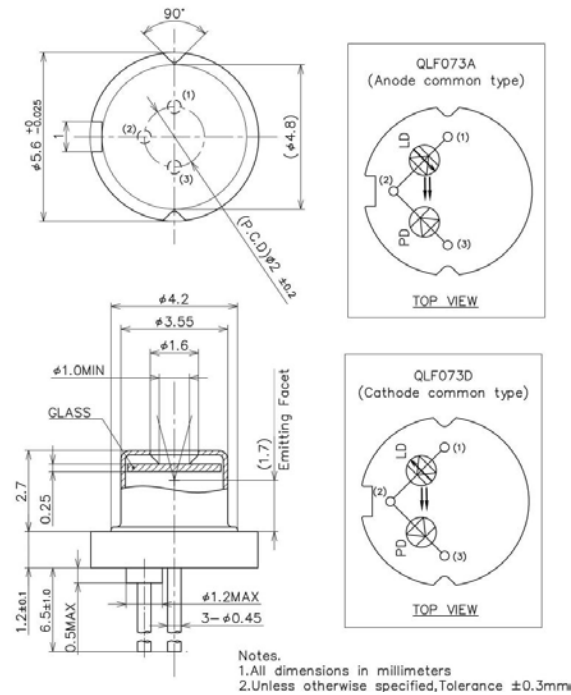

7. Notice

• Safety Information

This product is classified as Class 3B laser product, and complies with 21 CFR Part 1040.10. Please do not take a look at laser lighting in operations since laser devices may cause troubles to human eyes. Please do not eat, burn, break and make chemical process of the products since they contain GaAs material.

• Handling products

Semiconductor lasers are easily damaged by external stress such as excess temperature and ESD. Please pay attention to handling products, and use within range of maximum ratings. QD Laser takes no responsibility for any failure or unusual operation resulting from improper handling, or unusual physical or electrical stress.

• RoHS

This product conforms to RoHS compliance related EU Directive 2011/65/EU.

Copyright 2012-2017 All Rights Reserved by QD Laser, Inc.

All company or product names mentioned herein are trademarks or registered trademarks of their respective owners. Information provided in this data sheet is accurate at time of publication and is subject to change without advance notice.