

## AlGaInP / Visible Laser Diode

### ADA-65074WL

650nm 7mW 85 °C High Temperature, Reliable Operation!

6-2D-LD65-116\_REV.00

#### Features

High temperature operation  
High reliability  
Stable quality  
BRDS & REACH Compliance




#### Applications

Automotive particle sensor  
Industrial and commercial light source

#### Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	$P_o$	CW	10	mW
Reverse voltage (LD)	$V_{RL}$	-	2	V
Reverse voltage (PD)	$V_{RD}$	-	15	V
Case temperature	$T_c$	-	-40~+85	°C
Storage temperature	$T_s$	-	-40~+95	°C

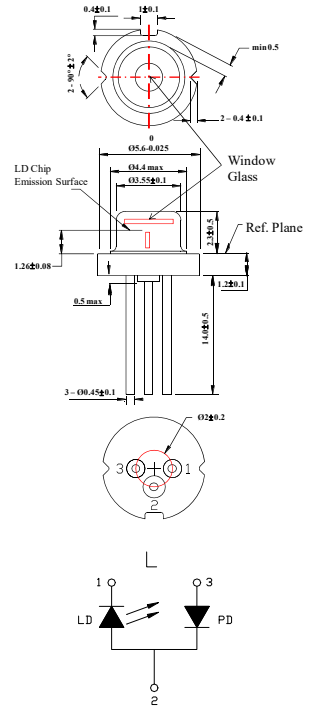

#### Electrical and optical characteristics ( $T_c=25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	$\lambda$	645	655	660	nm	$P_o=7\text{mW}$
Threshold current	$I_{th}$	-	20	28	mA	
Operating current	$I_{op}$	-	28	35	mA	$P_o=7\text{mW}$
Operating voltage	$V_{op}$	-	2.2	2.5	V	$P_o=7\text{mW}$
Differential efficiency	$\eta$	0.7	0.85	1.10	mW/mA	$P_o=3\text{--}5\text{mW}$
Monitor current	$I_m$	0.1	0.2	0.3	mA	$P_o=7\text{mW}$ , $V_{RD}=5\text{V}$
Parallel divergence angle	$\theta_{//}$	6	9	12	deg	$P_o=7\text{mW}$
Perpendicular divergence angle	$\theta_{\perp}$	25	28	32	deg	
Parallel FFP deviation angle	$\Delta\theta_{//}$	-2	0	+2	deg	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-2	0	+2	deg	
Emission point accuracy	$\Delta x\Delta y\Delta z$	-80	0	+80	um	

#### • Precautions

- \* Do not operate the device above maximum ratings even short period of time. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.

For reference only. Contents above are subject to change without notice.







## AlGaInP / Visible Laser Diode

## ADA-65074WL

6-2D-LD65-116\_REV.00

### 650nm 7mW 85 °C High Temperature, Reliable Operation!

- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

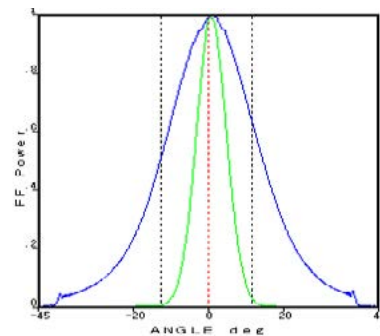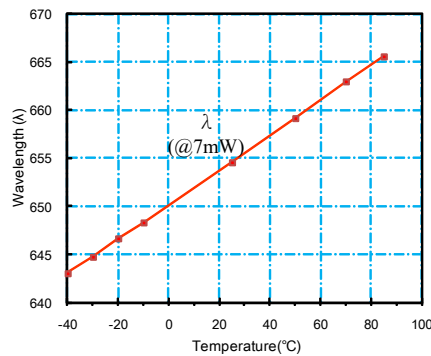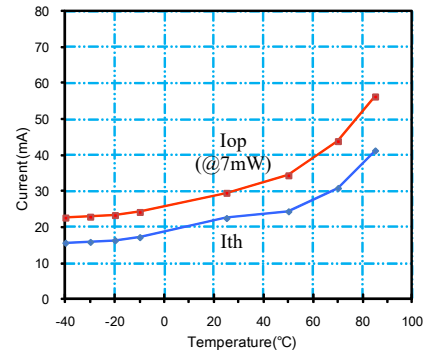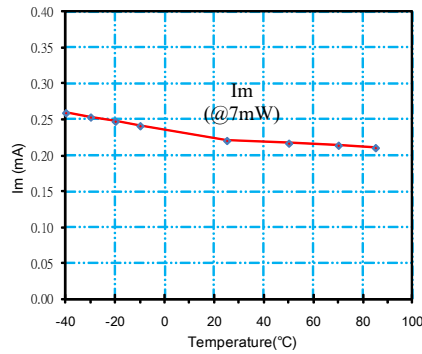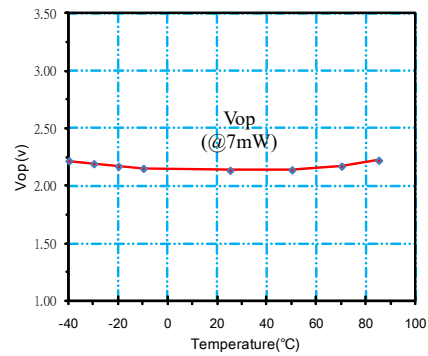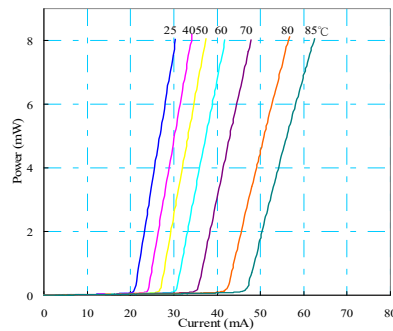

For reference only. Contents above are subject to change without notice.