



650nm~660nm 20mW~30mW SM Fiber Coupled Laser Diode with 4um SMF
650nm 20mW Coaxial Pigtailed LD with Single Mode Fiber | Red Diode Laser Module
WSP-650-020m-4

650nm Pigtailed Diode Laser		20mW/SM Fiber	
PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	-10~+60	°C
Storage Temperature	T_{stg}	-40~+85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C
Features:			
<ul style="list-style-type: none"> • 650nm • Single Mode Fiber • Coaxial or B82 Package 			
Applications:			
<ul style="list-style-type: none"> • Medical Laser Treatment • Other 			
Specifications	WSP-650-020m-4		
	Min	Type	Max
Center Wavelength@25°C	±5nm	658nm	±10nm
Spectral Width (FWHM)	----	2.0nm	----
Output Power	----	20mW	----
Fiber Type	Single Mode Fiber		
Fiber Core	4um		
Recommend Operating Temperature	25°C		
Fiber Connector	FC/SC/SMA905		
Fiber Length	----	80cm	100cm
Threshold Current	----	45mA	65mA
Operating Current	----	140mA	160mA
Operating Voltage	----	2.6V	3.2V
Package Style	Coaxial or B82		


Coaxial Package View: (Part Number: WSLP-650-020m-4)

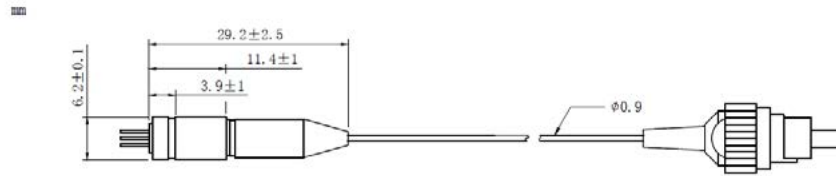

B82 Package View: (Part Number: WSLP-650-020m-4-B)

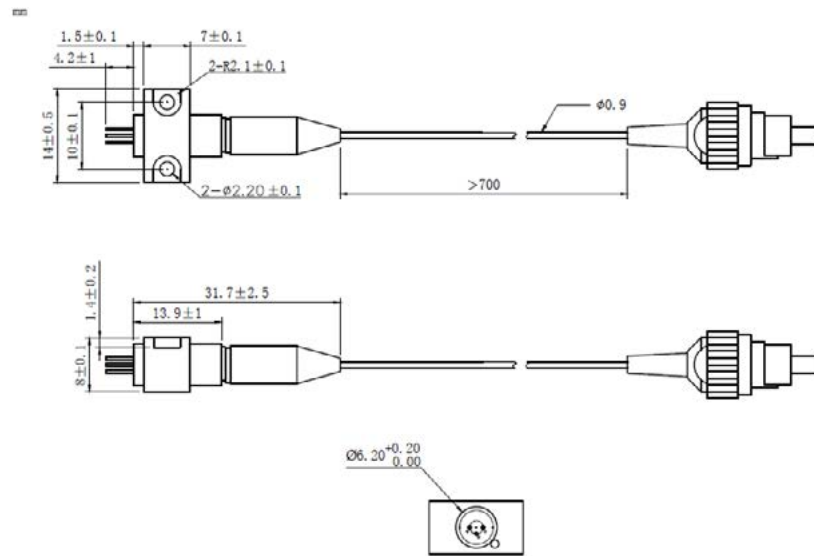

PIN Bottom View:



1	LD(+)
2	LD(-)
3	NC

**Electrically shorten LD module and store in non-extreme conditions.
Suggest using the constant current power supply.**

