

# AlGaInP Visible Laser Diode

635nm 5mW Low Iop type

ADL-6305FTL

T6-2D-LD63-017\_REV.00

### Features


- Low operation current
- High precision assembly
- High visibility

### Applications

- Industry laser markers
- Measuring instruments
- Laser pointers
- Levelers

### Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	$P_o$	CW	6	mW
Reverse voltage (PD)	$V_{RD}$	-	30	V
Forward current (PD)	$I_{FD}$	-	10	mA
Case temperature	$T_c$		-10~+40	°C
Storage temperature	$T_s$		-40~+85	°C

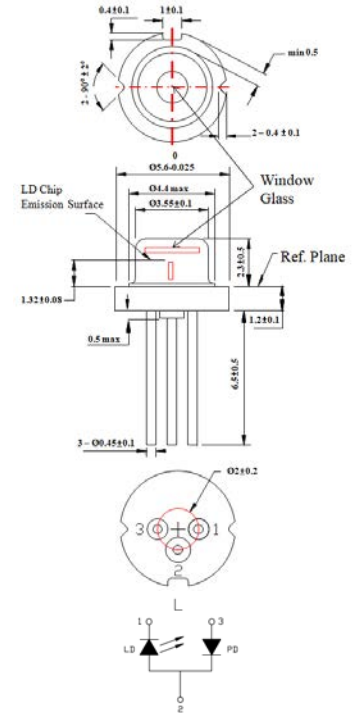

### Electrical and optical characteristics ( $T_c=25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	$\lambda$	630	635	640	nm	$P_o=5\text{mW}$
Threshold current	$I_{th}$	-	15	20	mA	
Operating current	$I_{op}$	-	22	28	mA	
Operating voltage	$V_{op}$		2.15	2.4	V	
Differential efficiency	$\eta$	0.4	0.6	0.9	mW/mA	$P_o=3\text{-}5\text{mW}$
Monitor current	$I_m$	0.1	0.22	0.3	mA	$P_o=5\text{mW}, V_{RD}=5\text{V}$
Parallel divergence angle	$\theta_{//}$	5	7	9	deg.	$P_o=5\text{mW}$
Perpendicular divergence angle	$\theta_{\perp}$	28	33	36	deg.	
Parallel FFP deviation angle	$\Delta\theta_{//}$	-3	0	+3		
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-3	0	+3		
Emission point accuracy	$\Delta x \Delta y \Delta z$	-80	0	80	um	

### • Precautions

- \* Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

For reference only. Contents above are subject to change without notice.