


DR-AN-40-MO

40 GHz Analog Medium Output Voltage Driver

DRIVER**FEATURES**

- Output voltage 6V_{pp}
- Linear amplifier
- Flat gain up to 30 GHz
- Single voltage power supply
- Low group delay variation

APPLICATIONS

- LiNbO₃ & InP modulators
- OFDM, RoF, Phase modulation
- Research & Development

OPTIONS

- Heat-sink
- Low output voltage version for EAM

RELATED EQUIPMENTS

- MX-LN-40, MXAN-LN-40 modulators
- MBC-AN Automatic Bias Controllers

The DR-AN-40-MO is a wideband RF non-inverting amplifier module designed for analog applications at frequencies up to 40 GHz.

The DR-AN-40-MO is characterized by a low Noise Figure and a linear transfer function whose 1 dB compression point is above 17 dBm. It exhibits flat Group Delay and Gain curves with reduced ripple over the entire bandwidth.

The DR-AN-40-MO operates from a single power supply for safety and ease of use, and offers gain control over 3 dB. It comes in a compact housing with V type RF connectors and with an optional heat-sink.

This amplifier module is ideally suited to drive optical modulators for analog applications.

Performance Highlights

Parameter	Min	Typ	Max	Unit
Cut-off Frequencies	50 k	-	40 G	Hz
Output Voltage	-	-	6.3	V _{pp}
Gain	-	26	-	dB
Saturated Output Power	-	-	20	dBm
Output power 1 dB comp	15	17	-	dBm
Noise Figure	3	-	5	dB

Measurements for V_{bias} = 8 V, V_{amp} = 1.5 V, V_{xp} = 2.2 V, I_{bias} = 300 mA

DR-AN-40-MO

40 GHz Analog Medium Output Voltage Driver

DRIVER**DC Electrical Characteristics**

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage (fixed)	V_{bias}	7	8	9	V
Current consumption	I_{bias}	-	300	350	mA
Gain control voltage	V_{amp}	0	1.5	1.7	V
Cross point control voltage	V_{xp}	0	2.2	2.3	V

Electrical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Lower frequency	$f_{3db, lower}$	-3 dB point	-	-	50	kHz
Upper frequency	$f_{3db, upper}$	-3 dB point	36	40	-	GHz
Gain	S_{21}	Small signal	-	26	-	dB
Gain ripple	-	< 40 GHz	-	±1.5	-	dB
Input return loss	S_{11}	50 MHz < f < 30 GHz	-	-10	-	dB
Output return loss	S_{22}	50 MHz < f < 30 GHz	-	-10	-	dB
Isolation	S_{12}	50 MHz < f < 30 GHz	-	-60	-	dB
Output power 1 dB	P_{1dB}	2 GHz < f < 20 GHz	15	17	-	dBm
Saturated power	P_{sat}	f < 20 GHz	-	20	-	dBm
Output voltage	V_{out}	Linear	0	4.5	-	V _{pp}
		Maximum swing	0	6.3	-	
Noise figure	NF	f < 1 GHz	5	-	-	dB
		1 GHz < f < 26 GHz	3	-	5	
Power dissipation	P	-	-	2.4	3.2	W

Conditions: $V_{in} = 0.5 V_{pp}$, $T_{amb} = 25^\circ C$, 50 Ω system**Absolute Maximum Ratings**







Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
RF input voltage	V_{in}	-	0.63	V _{pp}
Supply Voltage	V_{bias}	0	9	V
DC current	I_{bias}	0	350	mA
Gain control voltage	V_{amp}	0	1.7	V
Output power control voltage	V_{xp}	0	2.3	V
Power dissipation	P_{diss}	-	3.2	W
Temperature of operation	T_{op}	0	+50	°C
Storage temperature	T_{st}	-20	+70	°C

DR-AN-40-MO

40 GHz Analog Medium Output Voltage Driver

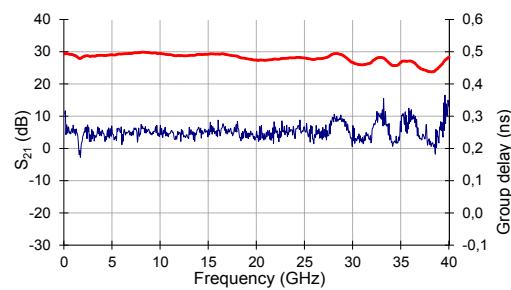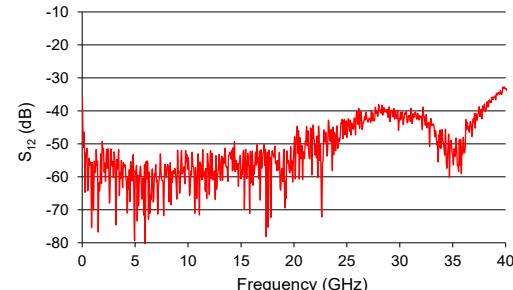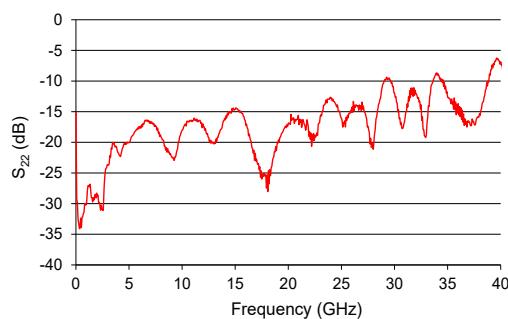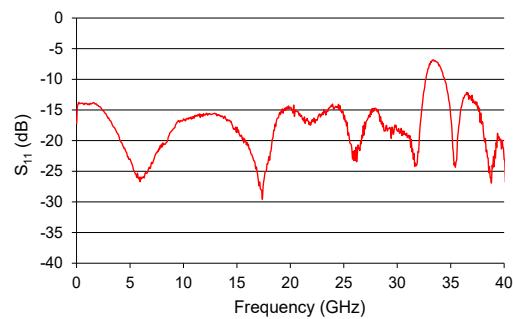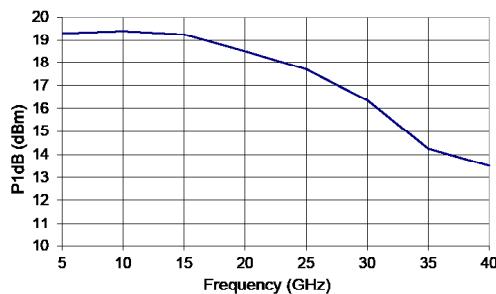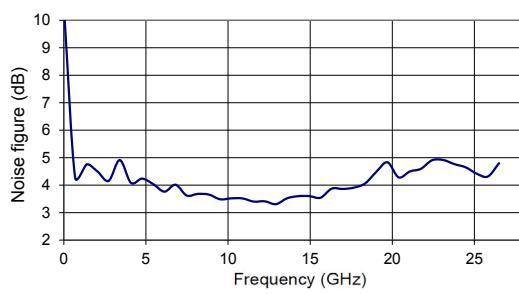DRIVER


S₂₁ and Group Delay Parameter CurveConditions: V_{bias} = 8 V, V_{amp} = 1.5 V, V_{xp} = 2.2 V, I_{bias} = 300 mA**S₁₂** Parameter CurveConditions: V_{bias} = 8 V, V_{amp} = 1.5 V, V_{xp} = 2.2 V, I_{bias} = 300 mA**S₂₂** Parameter CurveConditions: V_{bias} = 8 V, V_{amp} = 1.5 V, V_{xp} = 2.2 V, I_{bias} = 300 mA**S₁₁** Parameter CurveConditions: V_{bias} = 8 V, V_{amp} = 1.5 V, V_{xp} = 2.2 V, I_{bias} = 300 mA**Saturated Output Power Curve**Conditions: V_{bias} = 8 V, V_{amp} = 1.5 V, V_{xp} = 2.2 V, I_{bias} = 300 mA**Noise Figure Curve**Conditions: V_{bias} = 8 V, V_{amp} = 1.5 V, V_{xp} = 2.2 V, I_{bias} = 300 mA

DR-AN-40-MO

40 GHz Analog Medium Output Voltage Driver


DRIVER

Electrical Schematic Diagram



Mechanical Diagram and Pinout

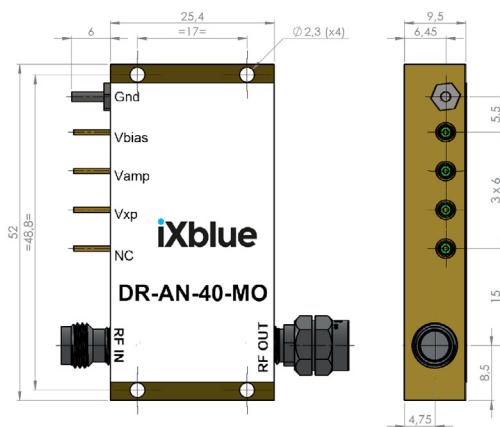All measurements in mm



The heat-sinking of the module is necessary. It's user responsibility to use an adequate heat-sink. Refer to page 6 for ixblue recommended heat-sink.

PIN	Function	Unit
IN	RF In	V connector female
OUT	RF Out	V connector male
V_{bias}	Power supply voltage	Set a typical operating specification
V_{amp}	Output voltage amplitude adjustment	Adjust for gain control tuning
V_{xp}	Output power adjustment	Adjust for power tuning

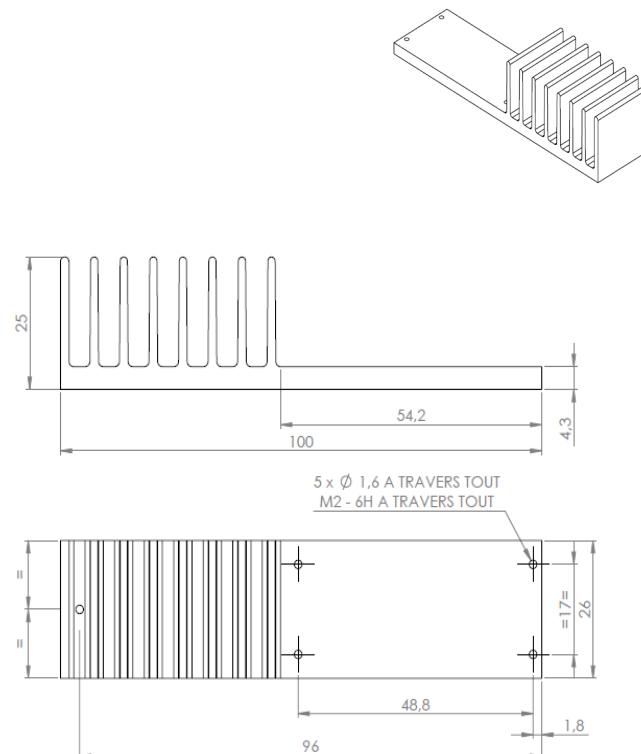
DR-AN-40-MO

40 GHz Analog Medium Output Voltage Driver

DRIVER

Mechanical Diagram And Pinout With HS-MO4 Heat-sink

All measurements in mm



01-2021_ED4 / SP-0041-PR-03

About us

iXblue Photonics produces specialty optical fibers and Bragg gratings based fiber optics components and provides optical modulation solutions based on the company lithium niobate (LiNbO_3) modulators and RF electronic modules.

iXblue Photonics serves a wide range of industries: sensing and instruments, defense, telecommunications, space and fiber lasers as well as research laboratories all over the world.

iXblue reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein. All statements, specification, technical information related to the products herein are given in good faith and based upon information believed to be reliable and accurate at the moment of printing. However the accuracy and completeness thereof is not guaranteed. No liability is assumed for any inaccuracies and as a result of use of the products. The user must validate all parameters for each application before use and he assumes all risks in connection with the use of the products.