


➤ PRODUCT DATA SHEET

## MTS1 TEMP / MTS1 HIGH-TEMP

Thermal IR detectors for temperature measurement

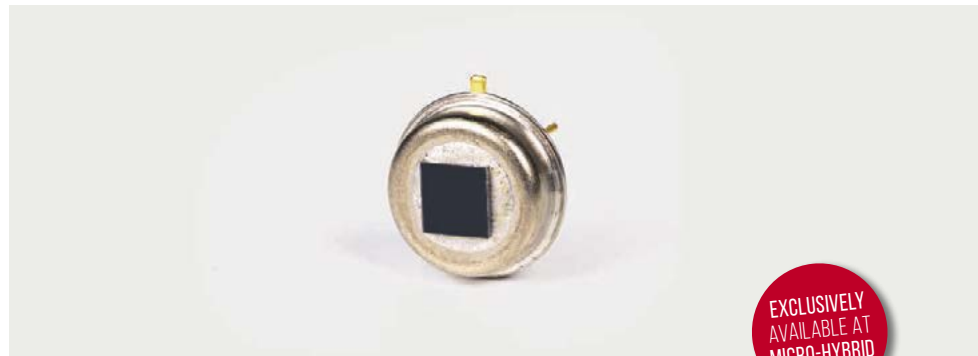

EXCLUSIVELY  
AVAILABLE AT  
MICRO-HYBRID

The thermo-electric IR detectors of the MTS series (Micro-Hybrid thermopile sensors) are characterized by a particularly high detectivity and longevity.

The base of each thermopile detector is formed by the so-called thermocouple. Due to thermal diffusion currents of two different metals (Seebeck effect), it generates an electrical voltage – the measurement signal. These serially connected thermocouples, called thermopiles, achieve a higher output voltage.

The sensitive component of Micro-Hybrid thermopile detectors is a MEMS-based thin-layer system on a silicon substrate. We offer sensor chips with either 80 (TS 80) thermocouples for non contact temperature measurement or 200 (TS 200) thermocouples for NDIR gas analysis. Depending on the application, both basic types are provided with different spectral absorber layers.

### FEATURES

- Environmental temperatures up to 180 °C
- Soldered filter (optional)
- High sensitivity
- Humidity resistant
- Suitable for chemical processes
- Resistant against environmental influences

### APPLICATIONS

- **Glas, Paper, Plastics:** Temperature monitoring of melting processes
- **Automotive and other moving parts:** Temperature monitoring of engines, brakes
- **Life science medicals:** Contactless temperature measurement of laboratory parameters
- **Metal:** Monitoring of thermal indicated process parameters
- **Solar semiconductors:** Maintenance

### BENEFITS

- **Excellent performance by best materials like BiSb / Sb for thermoelectrical effect:**
  - **Worlds best detectivity** up to  $7.2 \times 10^8 \text{ cm} \times \text{Hz}^{1/2}/\text{W}$
  - High sensitivity up to 295 V/W

PRODUCT DATA SHEET > IR detectors > MTS1 TEMP / MTS1 HIGH-TEMP | © Micro-Hybrid-Electronic GmbH | 2020-10


All rights reserved. All specifications – technical included – are subject to change without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein.

 **INFRARED COMPONENTS  
AND SYSTEMS**

### Technical data

Technical parameter	TEMP	HIGH-TEMP	Unit
Active area	∅ 0.5	∅ 0.5	mm
Aperture	∅ 0.75	∅ 0.75	mm
Number of thermocouples	80	80	
Time constant <sub>(0-63 %)</sub> <sup>1,3</sup>	typ. 30	typ. 30	ms
DC output voltage <sup>1,3</sup>	typ. 2.2	typ. 2.2	mV
DC sensitivity <sup>1,3</sup>	typ. 295	typ. 295	V/W
Temperature coefficient of sensitivity <sup>2</sup>	typ. -0.4	typ. -0.4	%/K
Noise voltage <sup>3</sup>	typ. 18	typ. 18	nV/Hz <sup>1/2</sup>
Noise equivalent power NEP <sup>1</sup>	typ. 0.06	typ. 0.06	nW/Hz <sup>1/2</sup>
Specific dectivity D* <sup>1,3</sup>	typ. 7.2*10 <sup>8</sup>	typ. 7.2*10 <sup>8</sup>	cmHz <sup>1/2</sup> /W
Resistance of thermopile <sup>3</sup>	20 ± 8	20 ± 8	kΩ
Temperature coefficient of resistance <sup>2</sup>	typ. -0.03	typ. -0.03	%/K
Thermistor	no thermistor Customer specific solution on request.	no thermistor Customer specific solution on request.	
Filling gas <sup>4</sup>	N <sub>2</sub> / Kr/ other	N <sub>2</sub> / Kr/ other	
Filters	Micro-Hybrid standard band pass filters (e.g. B1 8-14 μm) and more information please see document „Infrared filters“. Customized filters possible on request.		
Operation temperature	-20 ... +85	-20 ... +180	°C
Housing	T039 (modified)	T039 (modified)	

### Pin out



- Pin 1 – TP+
- Pin 2 – TP-
- Pin 3 – PTC
- Pin 4 – GND/CASE




<sup>1</sup> on air without cap, blackbody T=500 K; E=38 W/m<sup>2</sup>

<sup>2</sup> temperature range from +25 to +70 °C

<sup>3</sup> at T<sub>amb</sub> = 25 °C

<sup>4</sup> in case of Kr-filling increase of DC output voltage, DC sensitivity, specific detectivity and time constant by the factor 1.7. Decrease of NEP by the same factor. Other gases on customer's request.


Typical operating characteristics of IR detectors > MTS1 High-Temp with window B1

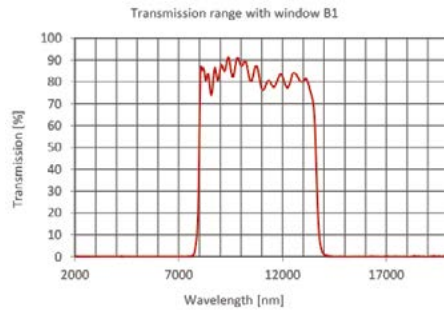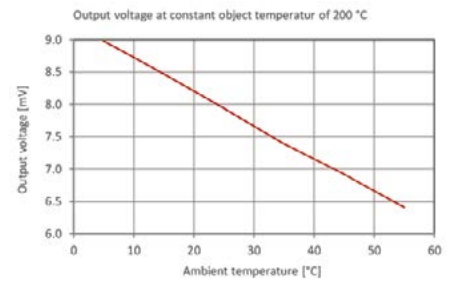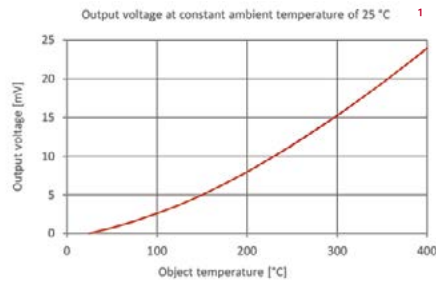


<sup>1</sup> assembled detectors with B1 window, full field of view

### Mechanical drawings


Bottom view




AA



Top view MTS 1 Temp



Top view MTS 1 High-Temp



all geometrical dimensions in mm

### Product overview

Article		Temp. min	Temp. max	Aperture	Channel	Application
TS1x80B-A-D0.75-1-Kr-B1	<b>S</b>	-20 °C	85 °C	0.75 mm	1	IR temperature measurement
TS1x80B-A-D0.75-1-Kr-180	<b>S</b>	-20 °C	180 °C	0.75 mm	1	IR temperature measurement

**S** in stock

NOVA IR and CMOSIR are companies of Micro-Hybrid Electronic GmbH.