

Data Sheet

## VIAVI T-BERD/MTS-6000A Compact Network Test Platform

Multilayer Solution for Network Installation and Maintenance

The highly integrated, modular VIAVI Solutions T-BERD®/MTS-6000A (V2) test platform can be used during all fiber network life-cycle phases. It offers field service technicians the greatest performance and versatile field upgradeability available today. The platform can be equipped with various options, such as a SATA hard disk, WiFi, Bluetooth, 3G/4G, LTE connectivity, and VFL/power meter/talk set, or other useful capabilities.

The flexibility of interchangeable module carriers and various plug-in modules let users create a platform that meets today's specific testing needs and yet it can evolve seamlessly to meet tomorrow's ever-changing network requirements.



Portable and upgradeable platform with interchangeable test modules increases technician productivity



### Key Benefits

- Scalable multitest platform evolves with your network and associated test requirements (physical to service layer)
- Optimized for workflow and cloud integration (Ethernet, WiFi, Bluetooth, 3G/4G, LTE, and beyond)
- Future-proofed, highly modular platform with field-upgradeable options and modules increases productivity
- StrataSync™ cloud-enabled software option increases field productivity

### Key Features


- Compact, lightweight, modular, and highly integrated platform
- Multilayer network solution for testing the physical through services layers
- Field-upgradeable VFL, power meter, talk set, and video inspection scope options
- Over 40 physical single-mode or multimode fiber test application modules available
- Multiservice capability for Ethernet and SONET/SDH tests
- Upgrade testing capabilities for this highly modular two-dimensional form factor with interchangeable module carriers, application modules, and platform options

### Applications

- Perform bidirectional OTDR and loss test set measurements
- Perform 10 G, 10 GE, and 40 G fiber dispersion testing (PMD/CD/AP)
- Optical spectrum analyzers for use installing and maintaining CWDM/DWDM networks
- Test 10 GE LAN- and WAN-PHY at 850, 1310, and 1550 nm

## Scalable Equipment is Ideal for Field Testing

The test applications in the highly integrated, compact, modular T-BERD/MTS-6000A (V2) platform's scalable, single-module carrier can expand easily to add new capabilities for current and future network testing needs. The platform's 8-inch color touch screen display and intuitive graphical user interface (GUI) improves viewing in any conditions. Its high-capacity Lithium-ion (LiON) battery extends life when used with high-powered modules. Other features include a video inspection scope (via USB port) and field-upgradeable optical test functions, such as visual fault locator (VFL), power meter, and optical talk set.

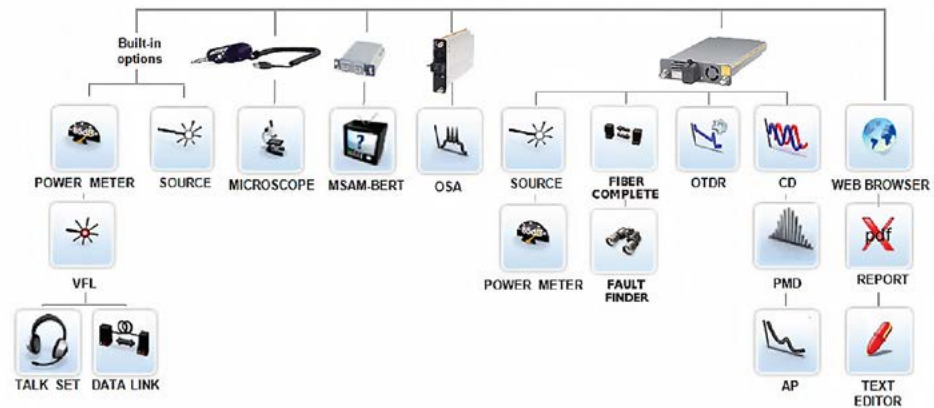

## Boost Productivity with Seamless Data Workflow


The T-BERD/MTS-6000A V2 can store media to its internal memory, SD card, USB dongle, or an optional 100 GB SATA hard disk. Users in secure environments can also store data/setups to a removable hard disk.

The platform also has field-upgradeable options for quick and easy remote control, as well as data/reports and setup upload/downloads using USB, Bluetooth, or via WiFi, Ethernet, or 3G/4G/LTE networks.

SmartAccessAnywhere offers technical support with remote access from anywhere.



T-BERD/MTS-6000A Compact Network Test Platform

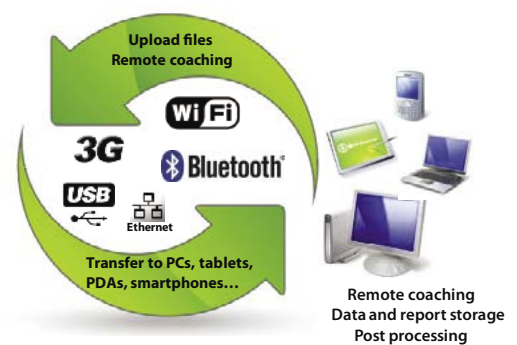

## Designed for Modularity and Connectivity

- 1 AC/DC input
- 2 Stylus
- 3 Visual fault locator (VFL) option
- 4 Power meter option
- 5 Optical talk set option
- 6 SD card
- 7 RS422/GPS
- 8 1 GE port
- 9 Two USB 2.0 ports
- 10 Headset jack
- 11 Mini USB 2.0 port
- 12 On/Off
- 13 Loudspeaker
- 14 8-inch indoor/outdoor color TFT touch screen display
- 15 Direct access keys and Start/Stop
- 16 Navigation keypad
- 17 Plug-in module
- 18 E6100 complete carrier module
- 19 Hard disk drive option (built-in)
- 20 WiFi/Bluetooth option (built-in)
- 21 Battery door



## A Module Carrier for Every Testing Need

The multidimensional design of the T-BERD/MTS-6000A (V2) provides optimal configuration flexibility with extended battery life. The E6100 module carrier is best suited for fiber applications; whereas, the high-powered battery in the E6200 module carrier extends battery life when used with the carrier Ethernet (MSAM) or other intensive fiber applications.



Back of the module carrier where other modules are attached



E6100 fiber module carrier



E6300 transport and fiber module carrier

T-BERD/MTS-6000A Compact Network Test Platform

## Empower Your Assets with StrataSync

StrataSync is a hosted, cloud-based solution that lets providers manage assets, configurations, and test data for VIAVI instruments to ensure that all instruments have the latest software and options installed. StrataSync manages inventory, test results, and performance data anywhere with browser-based ease to improve technician and instrument efficiency. StrataSync manages and tracks test instruments, collects and analyzes results from the entire network, and informs and trains the workforce.



## Specifications (Typical 25°C)

Platform	Description
Display	8 in TFT color touch screen, LCD 800x600, with high-visibility option
I/O interfaces	2 USB 2.0 ports 1 mini-USB 2.0 port RJ45 LAN 10/100/1000 Mbps 1 RS422 interface Built-in Bluetooth (optional) Built-in WiFi 802.11 b/g/n (optional) 1 audio jack 1 micro SD interface
Internal memory	2GB (128MB for storage)
<b>Power Supplies</b>	
Battery type	Standard removable LiON batteries
AC/DC adapter	input 100–240 V, 50–60 Hz, Output 19 V DC/4.7 A
<b>Size</b>	
Mainframe with one 6100 module carrier and battery (LxHxW)	290 x 188 x 97 mm (11.5 x 7.4 x 3.8 in)
<b>Weight</b>	
Mainframe only (without battery and module)	2.4 kg (5.3 lb)
Mainframe with one 6100 module carrier and battery	3.4 kg (7.5 lb)
<b>Environmental</b>	
Operating temperature range (no options)	–20 to +50°C (–4 to 122°F)
Operating temperature range (all options)	0 to +40°C (32 to 104°F)
Storage temperature	–20 to +60°C (–4 to 140°F)
Humidity	0 to 95% noncondensing
<b>Base Unit Optical Interfaces (optional)</b>	
<b>Power Meter<sup>1</sup></b>	
Calibrated wavelengths	850, 1310, 1490, 1550, 1625 nm
Wavelength range	800 to 1650 nm in 1 nm increments
Accuracy <sup>2</sup>	±0.2 dB
Measurement range <sup>3</sup>	+10 to –60 dBm
Maximum resolution	0.01 dB/0.01 nW
Connector type	Universal push/pull (UPP)

Talk Set	
Dynamic range	45 dB
Function	Telephone, data transfer
Laser class	Class 1
Connector type	Universal push/pull (UPP)
Visual Fault Locator (VFL)	
Wavelength	650 nm
Emission mode	CW, 1 Hz
Laser class	Class 2 as per standards EN60825-1 and FDA21 CFR Part 1040.10

1. At 25°C after 20 minutes for stabilization and after zero setting
2. At calibrated wavelength (except 1650 nm)
3. –45 dBm from 800 to 1650 nm

## Ordering Information

Base Instrument		
Description	Part Number	
T-BERD/MTS-6000A V2 platform with color touch screen display	ETB6000AV2S/EM6000AV2S	
T-BERD/MTS-6000A V2 platform with high visibility color touch screen display	ETB6000AV2M/EM6000AV2M	
Single fiber optic module carrier	E6100	
High power fiber optic and transport module carrier	E6300	
Built-in optical power meter and VFL with 2.5 mm UPP connectors	E80EPMVFL	
Built-in optical talk set (adapter to be configured)	E80ETS	
Built-in optical talk set (adapter to be configured) and optical power meter (2.5 mm UPP connector)	E80ETSPM	
Built-in optical talk set (adapter to be configured), optical power meter, and VFL (2.5 mm UPP connectors)	E80ETSPMVFL	
Built-in WiFi option	E60V2WIFI	
Built-in Bluetooth option	E60V2BLUE	
Additional high-power LiON rechargeable battery	E60LIHP1	
100 GB SATA hard disk option (required for Transport applications)	E60V2HDISK	
Accessories		
Description	Part Number	
Cigarette lighter power adapter	E80lighter	
Wrap-around carrying case for 6000A (V2)	ESCASE6KV2	
Soft case	E40SCASE1	
Optical FiberTrace 2 software	EOFS100	
Optical FiberCable 2 software	EOFS200	
Optical Connectors*		
Field-replaceable connectors: EUNIPCFC, EUNIPCSC, EUNIPCST, EUNIPCDIN, EUNIPCLC, EUNIAPCFC, EUNIAPCSC, EUNIAPCST, EUNIAPCDIN, and EUNIAPCLC		

\* Connectors for the loss test set and talk set options must be the same type.

T-BERD/MTS-6000A Compact Network Test Platform

## VIAVI Care Support Plans

Increase your productivity for up to 5 years with optional VIAVI Care Support Plans:

- Maximize your time with on-demand training, priority technical application support and rapid service.
- Maintain your equipment for peak performance at a low, predictable cost.

For more Information: go to [viasolutions.com/viavicareplan](https://viasolutions.com/viavicareplan)

### Features

\*5-year plans only

Plan	Objective	Technical Assistance	Factory Repair	Priority Service	Self-paced Training	5 Year Battery and Bag Coverage	Factory Calibration
 BronzeCare	Technician Efficiency	Premium	✓	✓	✓		
 SilverCare	Maintenance & Measurement Accuracy	Premium	✓	✓	✓	✓*	✓

© 2020 VIAVI Solutions Inc.  
Product specifications and descriptions in this document are subject to change without notice.  
6000av2-ds-fop-tm-ae  
30175776 902 0120