

Datasheet

LIA-MV-200-H

Lock-In-Amplifier Module




Features

- BNC connectors for input and output signals
- Rugged aluminum housing
- Single phase detection with X output
- Working frequency 50 Hz ... 120 kHz, digital phase shifter 0 ... 360°
- Parameter control by local switches and opto-isolated digital inputs
- Optional reference oscillator module available

Applications

- Spectroscopy
- Luminescence, fluorescence, phosphorescence measurements
- Light scattering measurements
- Opto-electronical quality control

Block Diagram

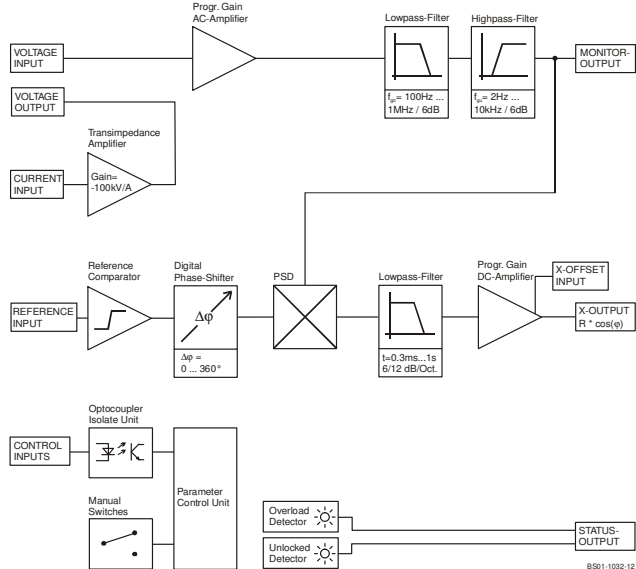

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



DE-LIA-MV-200-H_R3/MG, JM/22JUN2016

01/24 / V3 / CHHW / femto/lock-in/lia-mv-200h

Datasheet

LIA-MV-200-H

Lock-In-Amplifier Module

Specifications	Test Conditions	$V_s = \pm 15 \text{ V}$, $T_A = 25 \text{ }^\circ\text{C}$		
Voltage Input	Voltage input characteristic	true differential instrumentation amplifier		
	Voltage input range	3 μV ... 1V in 1-3-10 steps (for full scale output)		
	Voltage input coupling	AC		
	Voltage input impedance	1 M Ω // 4 pF		
	Voltage input noise	12 nV/ $\sqrt{\text{Hz}}$		
	Voltage input CMRR	110 dB @ 1 kHz, 100 dB @ 10 kHz		
	Voltage input gain drift	100 ppm/K		
Current Input	Current input characteristic	transimpedance amplifier, -100 kV/A (inverting)		
	Current input range	30 pA ... 10 μA in 1-3-10 steps (for full scale output)		
	Current input noise	0.4 pA/ $\sqrt{\text{Hz}}$		
	Current input source-capacit.	10 pF – 500 pF (recommended)		
	Current input gain error vs. Source capacitance	C_s	$f < 20 \text{ kHz}$	$f = 50 \text{ kHz}$
	10 pF	< 1 %	1 %	4 %
	100 pF	< 1 %	1 %	3 %
	500 pF	< 1 %	4 %	3 %
Signal Filter (without optional Bandpass-Module)	Signal filter lowpass (-3 dB BW)	1 MHz, 100 kHz, 10 kHz, 1 kHz, 100 Hz; 6 dB/oct. selectable per jumper		
	Signal filter highpass (-3 dB BW)	2 Hz, 10 Hz, 100 Hz, 1 kHz, 10 kHz; 6 dB/oct. selectable per jumper		
	Signal filter cutoff accuracy	$\pm 20 \%$		
	Max. dynamic reserve	80 dB		
Signal Monitor Output	Signal monitor output gain	1 ... 3333 (depends on gain setting)		
	Signal monitor output voltage	$\pm 8 \text{ V}$ max.		
	Signal monitor output impedance	100 Ω		
	Signal monitor output current	$\pm 10 \text{ mA}$ max.		
Note	When using current input with low input ranges, the monitor output may be disabled by opening the soldering jumper at the board (near JP1) to prevent from recoupling.			
Demodulator	Demodulator dynamic reserve	15 dB @ ultra stable setting 35 dB @ low drift setting 55 dB @ high dynamic setting		
	Reference Input	Reference input voltage range	$\pm 100 \text{ mV}$... $\pm 5 \text{ V}$ @ bip. mode (0 V comparator threshold) $-5 \text{ V} / +10 \text{ V}$ @ TTL mode (+2 V comparator threshold)	
	Reference input impedance	1 M Ω		
Reference Input	Reference acquisition time	max. 2 s @ fast setting max. 4 s @ slow setting		
	Phase Shifter	Phase shifter type	digital, working frequency 50 Hz ... 120 kHz	
Phase shifter range		0 ... + 360 $^\circ$		
Phase shifter resolution		1.4 $^\circ$ @ $f < 60 \text{ kHz}$, 2.8 $^\circ$ @ $f > 60 \text{ kHz}$		
Phase shifter drift		< 100 ppm/K		
Phase shifter accuracy		< 0.3 $^\circ$		
Time Constants	Time constant range	300 μs ... 1 s in 1-3-10 steps		
	Time const. filter characteristic	6 dB/oct. or 12 dB/oct. switchable		

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



Datasheet

LIA-MV-200-H

Lock-In-Amplifier Module

Specifications (continued) Output	Output channels Output voltage range Output current Output impedance Output DC-stability	X = in phase ±10 V (@ 2 kΩ load) ±5 mA max. 50 Ω 5 ppm/K @ ultra stable setting 50 ppm/K @ low drift setting 500 ppm/K @ high dynamic setting 2 % @ sinusoidal input signal																															
	Output basic accuracy Output voltage offset range Output voltage offset control Output load impedance	 ±100 % full scale by ±10 V control voltage >2 kΩ																															
Status Indicator LED	Functions	amplifier overload status reference PLL unlocked status																															
Digital Control	Control input voltage Control input current Digital status output voltage Digital status output current	low: -0.8 V ... +0.8 V, high: +1.8 V ... +12 V 0 mA @ 0V, 1.5 mA @ +5 V, 4.5 mA @ +12V typ. Active: +4.5 V typ., Non Active: 0 V typ. 10 mA max.																															
Power Supply	Supply voltage Supply current	±15 Vdc ... ±18 Vdc -60 mA, +120 mA																															
Case	Material Dimension Weight	Aluminum anodized 64,4 x 105,0 x 223,0 mm (without BNC connectors) 1000 g (2.2 lb)																															
Temperature Range	Storage temperature Operating temperature	-40 ... +100 °C 0 ... +60 °C																															
Absolute Maximum Ratings	Signal input AC voltage Reference input voltage Control input voltage Power supply voltage	50 V _{pp} ±15 V -5 V, +30 V ±22 V																															
Switch Settings	4 dip switch - presettings	<table border="1"> <thead> <tr> <th>switch</th> <th>OFF</th> <th>ON</th> </tr> </thead> <tbody> <tr> <td>S1</td> <td>low drift & high dynamic</td> <td>ultra stable & low drift</td> </tr> <tr> <td>S2</td> <td>1-f mode</td> <td>2-f mode</td> </tr> <tr> <td>S3</td> <td>fast PLL-locking</td> <td>slow PLL-locking</td> </tr> <tr> <td>S4</td> <td>reference-input-threshold = 0 V</td> <td>reference-input-threshold = +2 V</td> </tr> </tbody> </table> <p>Sensitivity setting, output DC-gain modes</p> <table border="1"> <thead> <tr> <th>mode</th> <th>DC-gain</th> <th>dyn. reserve</th> <th>DC-stability</th> </tr> </thead> <tbody> <tr> <td>ultra stable</td> <td>10</td> <td>low</td> <td>high</td> </tr> <tr> <td>low drift</td> <td>100</td> <td>medium</td> <td>medium</td> </tr> <tr> <td>high dynamic</td> <td>1000</td> <td>high</td> <td>low</td> </tr> </tbody> </table> <p>If only low dynamic reserve is required, select the higher DC-stability settings. Use dip switch S1 to preselect either the two upper or the two lower DC-gain modes, then select best mode by sensitivity switch settings 0-7 or 8-F.</p>	switch	OFF	ON	S1	low drift & high dynamic	ultra stable & low drift	S2	1-f mode	2-f mode	S3	fast PLL-locking	slow PLL-locking	S4	reference-input-threshold = 0 V	reference-input-threshold = +2 V	mode	DC-gain	dyn. reserve	DC-stability	ultra stable	10	low	high	low drift	100	medium	medium	high dynamic	1000	high	low
switch	OFF	ON																															
S1	low drift & high dynamic	ultra stable & low drift																															
S2	1-f mode	2-f mode																															
S3	fast PLL-locking	slow PLL-locking																															
S4	reference-input-threshold = 0 V	reference-input-threshold = +2 V																															
mode	DC-gain	dyn. reserve	DC-stability																														
ultra stable	10	low	high																														
low drift	100	medium	medium																														
high dynamic	1000	high	low																														

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



Datasheet

LIA-MV-200-H

Lock-In-Amplifier Module

Switch Settings (continued)

S1 = ON: sensitivity setting
for full scale (= 10 V output)

ultra stable mode			low drift mode		
setting	voltage	current	setting	voltage	current
0	1 V	10 μ A	8	100 mV	1 μ A
1	300 mV	3 μ A	9	30 mV	300 nA
2	100 mV	1 μ A	A	10 mV	100 nA
3	30 mV	300 nA	B	3 mV	30 nA
4	10 mV	100 nA	C	1 mV	10 nA
5	3 mV	30 nA	D	300 μ V	3 nA
6	1 mV	10 nA	E	100 μ V	1 nA
7	300 μ V	3 nA	F	30 μ V	300 pA

S1 = OFF: sensitivity setting
for full scale (= 10 V output)


low drift mode			high dynamic mode		
setting	voltage	current	setting	voltage	current
0	100 mV	1 μ A	8	10 mV	100 nA
1	30 mV	300 nA	9	3 mV	30 nA
2	10 mV	100 nA	A	1 mV	10 nA
3	3 mV	30 nA	B	300 μ V	3 nA
4	1 mV	10 nA	C	100 μ V	1 nA
5	300 μ V	3 nA	D	30 μ V	300 pA
6	100 μ V	1 nA	E	10 μ V	100 pA
7	30 μ V	300 pA	F	3 μ V	30 pA

Time constant setting

	6 dB/oct.	12 dB/oct.	time constant
0	8		300 μ s
1	9		1 ms
2	A		3 ms
3	B		10 ms
4	C		30 ms
5	D		100 ms
6	E		300 ms
7	F		1 s

Phase shift setting

Phase shift is adjusted by 2 phase switches with 8 Bit resolution. Values 0 ... 255 (Hex 00 ... FF) correspond to phase shift setting 0 ... +360°. One step with switch marked "Coarse" changes phase shift by 22.5°. The "Fine"-switch changes phase shift by 1.4° - steps:



If frequency range $f > 70$ kHz or 2-f mode is selected, the resolution of digital phase control changes to 2.8° and the phase shift range doubles to 0 ... +720°.

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



Datasheet

LIA-MV-200-H

Lock-In-Amplifier Module

Internal Jumper Settings
(jumpers are accessible
when top of case is
removed)

Input signal filter
setting

Set cut-off frequency of input lowpass filter
with JP1 + JP2 (always same position) and
highpass filter with JP3:

JP3	highpass -3 dB cut-off	JP1, JP2	lowpass -3 dB cut-off
3 - 4	2 Hz	1 - 2	100 Hz
1 - 3	10 Hz	3 - 4	1 kHz
2 - 4	100 Hz	5 - 6	10 kHz
3 - 5	1 kHz	7 - 8	100 kHz
4 - 6	10 kHz	none	1 MHz *


* (At sensitivity settings 6,7 & E,F max. 200 kHz)

Frequency range
selection

JP4	frequency range
1 - 2	f < 60 kHz
3 - 4 & 5 - 6	f > 60 kHz
7, 8	test pins, do not use

(if 2-f mode is used, position is always 1-2)

Internal Jumper Position
Diagram
(look at top of board when
case is opened)

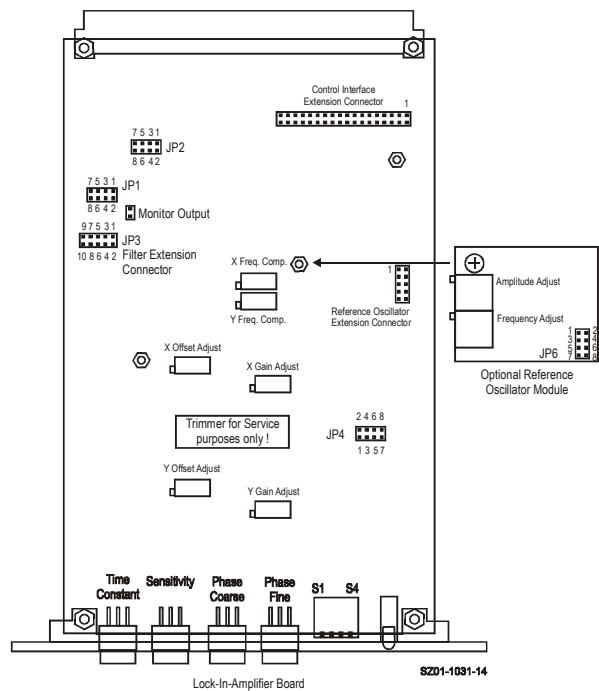

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



Datasheet

LIA-MV-200-H

Lock-In-Amplifier Module

Internal Connector
(of build-in Lock-In Board)

Connector type	Euro-card DIN 41612 connector, 64 pin male, (a+c)
Input	Pin C2: voltage input, non-inverting, DC-coupled Pin C3: voltage input, non-inverting, AC-coupled Pin C4: voltage input, inverting, AC-coupled Pin C5: voltage input, inverting, DC-coupled Pin C7: current input Pin C6: current amplifier voltage output Pin A2- A6: input GND
Monitor output	Pin C9: monitor output Pin A9: monitor GND
Output	Pin C14: X-signal output Pin C15: output GND
Offset input	Pin A10: X-offset input Pin A13: offset GND
Status output	Pin C10: unlocked status output Pin C11: overload status output Pin C17: status output GND (=power supply GND)
Power supply	Pin A16+C16: power supply – 15V Pin A18+C18: power supply + 15V Pin A17+C17: power supply GND
Remote control inputs (opto-isolated)	Pin C19: time constant (TC0) Pin A19: time constant (TC1) Pin C20: time constant (TC2) Pin A20: time constant slope (TCSL) Pin A22: sensitivity (SENO) Pin C21: sensitivity (SEN1) Pin A21: sensitivity (SEN2) Pin C22: dynamic mode (DYN0) Pin A28: phase shift (PH0) Pin C28: phase shift (PH1) Pin A27: phase shift (PH2) Pin C27: phase shift (PH3) Pin A26: phase shift (PH4) Pin C26: phase shift (PH5) Pin A25: phase shift (PH6) Pin C25: phase shift (PH7) Pin C24: disable local switch control Pin A23+A24: remote control GND (common optocoupler cathode)
Reference input	Pin A32: reference input Pin A31: reference input ground
Reference output (Connected only if optional oscillator module is installed)	Pin A30: reference output Pin A17: refer. output GND (=power supply GND) Pin A29: reference synchronization input
Standard control interface (Connected only if optional control interface module (future product) is installed)	Pin C29: interface 0 Pin C30: interface 1 Pin C31: interface 2 Pin C32: interface 3

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY




Datasheet

LIA-MV-200-H

Lock-In-Amplifier Module

External Connectors
(at backside, Standard
Configuration)

Signal input	Factory set to BNC, isolated (single ended)
X-output	BNC
Reference input	BNC
Power supply	Lemo® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52) Pin 1: +15V Pin 2: -15V Pin 3: GND
	
Control port	Sub-D 25-pin, female, qual. class 2 Pin 1: +12V (stabilized power supply output) Pin 2: -12V (stabilized power supply output) Pin 3: AGND (analog ground) Pin 4: +5V (stabilized power supply output) Pin 5: X-output Pin 6: overload status output Pin 7: unlocked status output Pin 8: disable local switch control input Pin 9: DGND (ground f. digital control pin 8 - 25) Pin 10: dynamic mode (DYN0) Pin 11: sensitivity (SEN0) Pin 12: sensitivity (SEN1) Pin 13: sensitivity (SEN2) Pin 14: time constant slope (TCSL) Pin 15: time constant (TC0) Pin 16: time constant (TC1) Pin 17: time constant (TC2) Pin 18: phase shift (PH0) Pin 19: phase shift (PH1) Pin 20: phase shift (PH2) Pin 21: phase shift (PH3) Pin 22: phase shift (PH4) Pin 23: phase shift (PH5) Pin 24: phase shift (PH6) Pin 25: phase shift (PH7)

Connector Wiring Options

General

The BNC-connector configuration can be easily changed by setting electrical jumpers at the internal I/O-adaptor card. Disconnect the power supply and open the case by loosening the two upper screws at the case front and rear side. Please pay attention to the ground connection at the backplane. Now open the case by lifting the top. The jumper options and functions are described in the following table.

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



Datasheet

LIA-MV-200-H

Lock-In-Amplifier Module

Connector Wiring Options,
Jumpers on internal
Adapter Board

Input connectors (JP1)	input wiring	jumper installed
	IN A = voltage input (single ended, AC)	" +V-IN → IN A" " GND → IN A/SHLD" " -V-IN → IN A/SHLD"
	IN A = voltage input (differential, AC)	" +V-IN → IN A" " -V-IN → IN A/SHLD"
	IN A / IN B = voltage input (2 BNC differential, AC) (OUT A cannot be used)	" +V-IN → IN A" " GND → IN A/SHLD" " -V-IN → IN B"
	IN A = current input (single ended)	" C-IN → IN A" " GND → IN A/SHLD" " -V-IN → C-OUT" " +V-IN → GND"
Output connectors (JP2)	output wiring	jumper installed
	OUT A = X-output	" X → OUT A" (JP1) "USE OUT A/NO IN B"
	OUT B = X-output	" X → OUT B"
	OUT A = Y-output	" Y → OUT A" (JP1) "USE OUT A/NO IN B"
	OUT B = Y-output	" Y → OUT B"
	OUT C = Y-output	" Y → OUT C"
	OUT A = R-output	" R → OUT A" (JP1) "USE OUT A/NO IN B"
	OUT B = R-output	" R → OUT B"
	OUT C = R-output	" R → OUT C"
	OUT B = monitor output	" MON → OUT B"
	OUT C = monitor output	" MON → OUT C"
	OUT B = unlocked output	" UNL → OUT B"
	OUT C = unlocked output	" UNL → OUT C"
	OUT B = Overload output	" OVL → OUT B"
	OUT C = overload output	" OVL → OUT C"
	OUT C = reference output	" REF-OUT → OUT C"
Reference connector (JP3)	reference wiring	jumper installed
(Reference output only if optional oscillator module is installed)	REF = reference input	" REF-IN → REF" (2 jumper)
	REF = reference output (reference output connected to ref. input)	" REF-OUT → REF-IN" (2 jp.) " REF-IN → REF" (2 jumper)
	REF = refer. sync. input (use OUT C as reference output)	" REF-SYNC → REF" (2 jp.)

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY



Datasheet

LIA-MV-200-H

Lock-In-Amplifier Module

Remote Control Operation

General

Remote control input bits are opto-isolated and connected by logical OR to local switch setting. The 4 hexadecimal switches are 4 Bit-coded as shown in the following table:

switch code	MSB		LSB	
	Bit 3	Bit 2	Bit 1	Bit 0
0	Low	Low	Low	Low
1	Low	Low	Low	High
2	Low	Low	High	Low
3	Low	Low	High	High
4	Low	High	Low	Low
5	Low	High	Low	High
6	Low	High	High	Low
7	Low	High	High	High
8	High	Low	Low	Low
9	High	Low	Low	High
A	High	Low	High	Low
B	High	Low	High	High
C	High	High	Low	Low
D	High	High	Low	High
E	High	High	High	Low
F	High	High	High	High

For remote control a switch setting, set the local switch to "0" and select the wanted setting via the 4-bit-code at the corresponding digital inputs.

Sensitivity switch -
corresponding inputs

Bit	corresponding control port input	
Bit 0	SEN0	(Pin A22)
Bit 1	SEN1	(Pin C21)
Bit 2	SEN2	(Pin A21)
Bit 3	DYNO	(Pin C22)

Time constant switch -
corresponding inputs

Bit	corresponding control port input	
Bit 0	TC0	(Pin C19)
Bit 1	TC1	(Pin A19)
Bit 2	TC2	(Pin C20)
Bit 3	TCSL	(Pin A20)

Phase switch coarse -
corresponding inputs

Bit	corresponding control port input	
Bit 0	PH4	(Pin A26)
Bit 1	PH5	(Pin C26)
Bit 2	PH6	(Pin A25)
Bit 3	PH7	(Pin C25)

Phase switch fine -
corresponding inputs

Bit	corresponding control port input	
Bit 0	PH0	(Pin A28)
Bit 1	PH1	(Pin C28)
Bit 2	PH2	(Pin A27)
Bit 3	PH3	(Pin C27)

Remote control example

For example, to select a switch setting code "6", you have to connect a "high"- level signal to the corresponding control input pins Bit 1 & Bit 2. Mixed operation, e.g. local phase settings and remote controlled sensitivity setting, is also possible.

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY




Datasheet

LIA-MV-200-H


Lock-In-Amplifier Module

Dimensions


Top View

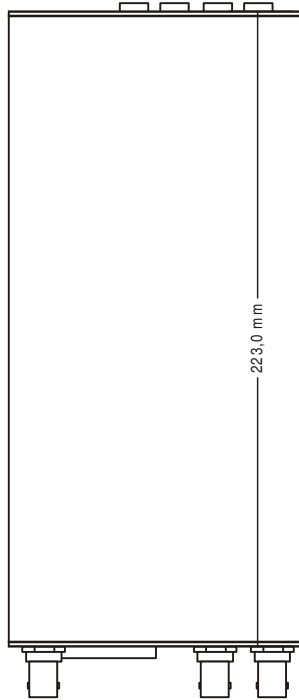

Front View

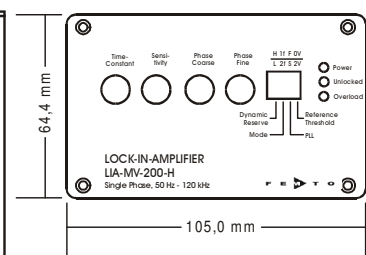

Back View



Case Material: Al, natural anodised DZ01-1072-10

Optional Extensions

- | | |
|-----------------------------|--|
| Reference oscillator module | Model No.: SOM-1
- frequency range 5 Hz ... 130 kHz, user adjustable
- output voltage 0 ... 2 V _{RMS} , user adjustable
- 100 ppm/K amplitude accuracy |
| Factory set | 1 kHz, 1 V _{RMS} |

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

